


THE BASIS FOR PERFECT FLOORS.

Cementitious levelling and smoothing compounds for all applications.



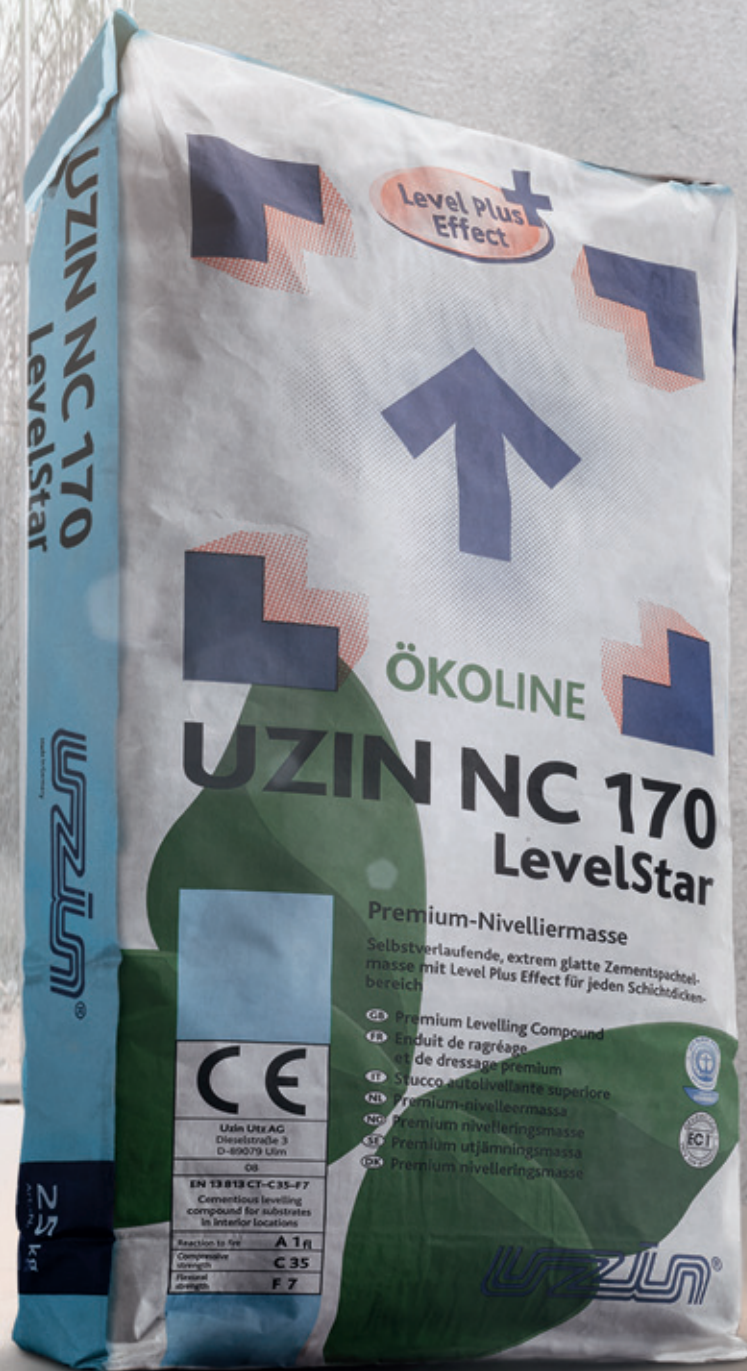

For all applications

UZIN NC 170 LevelStar

Premium Levelling Compound

★ Restore substrates with the latest levelling compound technology

Self-levelling, extremely smooth cementitious levelling compound, with Level Plus Effect for any thickness range

- Superior flow characteristics, even better results of flooring surfaces
- Very smooth surface, time and cost savings as well as optimal installation results
- Optimal absorbency in spite of high strength; time advantage with the bonding of high-quality floor covering
- Available also in Big-Bags for large volumes

Item no. 1062

25kg sack

Item no. 21446

1000kg BigBag



ÖKOLINE



For the contract sector with little traffic

UZIN NC 150 NEW

Levelling compound

★ Smoothing substrates economically

Self-levelling cement floor levelling compound for thicknesses up to 10 mm

- Generous coverage and economic in standard areas

Item no. 33134

25 kg sack



For economic levelling with perfect results

UZIN NC 145

Standard levelling compound

★ For the installation of textile and resilient floor coverings


Self-levelling cementitious levelling compound for thicknesses up to 4 mm

- Cost-sensitive for light residential and commercial areas
- Levelling compound for levelling work on standard construction substrates

Item no. 1145

25 kg sack



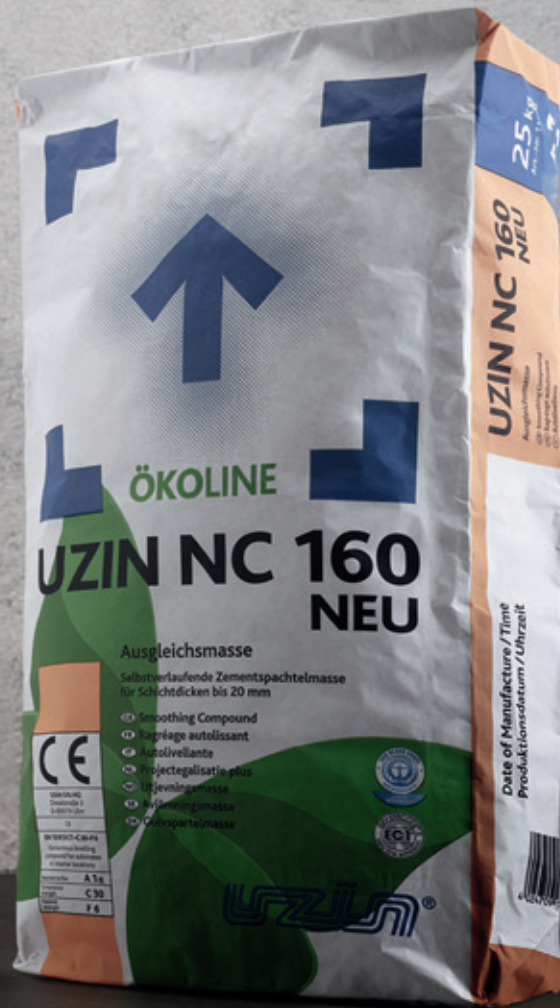

For daily contract work

UZIN NC 160 NEW

Smoothing compound

★ Levelling substrates in contract applications

Self-levelling cementitious levelling compound for thicknesses up to 20 mm

- Best processing properties
- Good sanding performance in spite of high strength, optimal in the contract sector

Item no. 11170

25 kg sack



CE ÖKOLINE

THE NEW UZIN QUALITY.

The new formulas of the UZIN levelling and smoothing compounds ensure improved mixing behaviour, even more uniform flow and higher absorbency. The effect of the shorter drying time is an extremely quick readiness for covering. The result: A clear advantage of time and costs with the bonding and installation of all types of floor covering. The UZIN levelling and smoothing compounds have very low emission, which is documented by the marking with the Blue Angel according to RAL UZ 113 and the EC 1 R PLUS; hence, it is especially environmentally compatible.

CRITERION	UZIN NC 170 LevelStar	UZIN NC 160 NEW	UZIN NC 150 NEW	UZIN NC 145
THICKNESS	WITHOUT LIMITATION	UP TO 20 MM	UP TO 10 MM	4 MM
COMPRESSIVE STRENGTH (DIN EN 13813)	C35	C30	C25	C20
FLEXURAL STRENGTH (DIN EN 13813)	F7	F6	F5	F 4
READINESS FOR COVERING 3 MM	15 HOURS	20 HOURS	24 HOURS	24 HOURS
READINESS FOR COVERING 5 MM	24 HOURS	30 HOURS	48 HOURS	
SUITABLE FLOOR COVERINGS	• TEXTILE FLOOR COVERING	• TEXTILE FLOOR COVERING	• TEXTILE FLOOR COVERING	• TEXTILE FLOOR COVERING
	• PVC/CV FLOOR COVERING	• PVC/CV FLOOR COVERING	• PVC/CV FLOOR COVERING	• PVC/CV FLOOR COVERING
	• LUXURY FLOOR COVERING	• LUXURY FLOOR COVERING	• LUXURY FLOOR COVERING	
	• RUBBER FLOORING	• RUBBER FLOORING	• LINOLEUM	
	• LINOLEUM	• LINOLEUM	• CORK	
	• CORK	• CORK		
	• CHLORINE-FREE FLOOR COVERING	• CHLORINE-FREE FLOOR COVERING		
	• PUR FLOOR COVERING	• PUR FLOOR COVERING		
	• WOOD FLOORING	• MULTI-PLY WOOD FLOORING		
	• CERAMIC AND			
	NATURAL STONE FLOORING			



“The self-levelling cementitious levelling compounds from UZIN are clearly positioned and tailored to different target groups.

You will find levelling compounds for universal applications, compensating compounds for daily use in the contract sector and smoothing compounds perfectly geared to residential areas. You will always make the right decision with the high-quality UZIN products.”

Thomas Schneider, Head of International Product Management

