



WOOD FLOORING INSTALLATION

NEW:  
interactive  
version!

switchTec®

# PRODUCT GUIDE

Installation Systems for Screed | Floor Coverings | Wood Flooring

As of: January 2016





"UZIN is my reliable partner! They are the source for great products, outstanding service, and the committed team supports me in being successful."

Jörn Spielberg  
Owner of Parkett Spielberg in Falkensee

"We assist our customers to help them be successful" – This is the motto that impels all UZIN staff to give their best for you. It is important that in addition to perfect products and systems you receive our support in your day to day work. The cover picture on the new UZIN Product Guide demonstrates this objective. Our customer, Jörn Spielberg, can be seen holding the UZIN flag. The background shows the reasons for trusting UZIN:

- Products which meet all your requirements: Constructing and preparing subfloors, installing floor coverings and wood flooring
- Comprehensive technical advice through our Technical Service – either via the hotline, at the construction site or through our installation recommendations
- Instant digital information via the App or Floor Navigator
- Continual education and sharing of new ideas in our seminars and workshops
- Network, exchange and marketing support at BOD – The Floor Designers

Trust us as your committed partner in all aspects of flooring. We are proud to be able to accompany and support you on your road to success!

# CONTENTS



## Subfloor Construction | Screed

14

UZIN Turbolight®-System

15

Special Screed

16 – 19

## Subfloor Preparation

20

Primers

21 – 24

Reaction Resin Primer

24

Moisture Barriers

25

Repair Smoothing Compounds

26 – 27

Wall Levelling Compound

28

Self-Levelling Compounds

29 – 33

Reaction Resin Levelling Compounds and Screeds

34 – 35

Subfloor Repairs

35 – 37

Insulating and Installation Underlays

38 – 41

## Floor Covering Adhesives

42

Universal Adhesives

43

Textile Flooring Adhesives

44 – 45

PVC and Rubber Adhesives

46 – 47

Luxury Vinyl Tile and Rubber Adhesives

48 – 49

Linoleum Adhesives

50 – 52

Contact Adhesives

53 – 54

Tackifiers

55 – 56

Electro Static Control Installation

56 – 58

## switchTec® Adhesive Technology

59

Adhesives for Floor Coverings

60 – 65

Adhesives for Skirtings and Coving

66 – 72

Adhesives for Stair Coverings

72

## Wood Flooring Installation

73

1-Component Reaction Resin Primer

74

2-Component Reaction Resin Primer

75

1-Component STP-Adhesives

76 – 77

1-Component PUR-Adhesives

78

2-Component PUR-Adhesives

79

Dispersion Primer

80

Dispersion Adhesives

80

Special Adhesives

81

Levelling Compound for Wood Flooring

81

Insulating and Installation Underlays

82

## Tools | Accessories

83

Tools | Accessories

84 – 93

## Service

94

Product Recommendations

96 – 107

Contact UZIN Germany

108 – 109

Contact Adresses Worldwide

110 – 111

# YOUR OPINION IS IMPORTANT TO US.



Ladies and gentlemen,  
dear customers,

Innovation and tradition, quality and balance, growth and sustainability – these are the values that have shaped the family enterprise Uzin Utz AG since its foundation in 1911, decisively guiding our activities.

We offer outstanding product quality which incorporates our ability to harness the latest technology. With our comprehensive technical know-how and the enthusiasm of our staff, you will enjoy the best experience on construction sites every day, as we always give our best for you.

As chairman of the board I trust in the proven success strategy and will continue to pursue it in the future. Beyond this, we strive to improve continuously, because good is just not good enough for us. How can we support you in your daily work and understand your needs even better? Nothing is more important to us than to know that you are always fully satisfied with our services and products.

You are our key driving force, helping us recognise new demands and early market trends which encourages us to develop products that are even better tailored to your requirements. All this helps to make you even more successful.

Together with my esteemed colleagues we will make sure that your preferences and suggestions are investigated. We look forward to your valued input! Feel free to send your ideas and preferences to me personally via [feedback-CEO@uzin-utz.com](mailto:feedback-CEO@uzin-utz.com) or by calling +49 731 4097 4728 Mondays between 1 and 3 PM (CET).

We will do everything to pursue our joint and sustained goals and look forward to the on-going development of our partnership.

Best wishes for our collaboration

Thomas Müllerschön  
Chairman of the Board





## PERSONAL CONTACT

For any further questions and suggestions you can contact me personally every Monday from 1–3 PM (CET).

E-Mail [feedback-CEO@uzin-utz.com](mailto:feedback-CEO@uzin-utz.com)

Telephone +49 731 4097 4728



## MILESTONES IN THE COMPANY'S DEVELOPMENT.

The brand UZIN is part of the Uzin Utz AG, a publicly listed company, active around the world. Over the last ten years, our turnover increased from 84 to 230,4 million Euros; the driving force is provided by our over 950 employees world-wide.

- 1911** Foundation of the company by Georg Utz
- 1948** Willi Utz takes over the management of the company; Registration of the UZIN brand at the patent office in Munich
- 1980** Dr. H. Werner Utz assumes the management of the company
- 1981** Development of a complete range of environmentally friendly first-generation adhesives
- 1997** Change of the corporate form to an AG (public company) and listing on the stock exchange
- 2001** Official opening of the European Logistics Centre; take-over of wood flooring lacquers specialist Pallmann
- 2002** Take-over of Wolff Spezialmaschinen GmbH, Vaihingen/Enz and the WOLFF brand for machines and tools
- 2004** Take-over of Unipro bv, Haaksbergen (Netherlands) and its affiliate Unipro nv, Gent (Belgium) with the Arturo brand for industrial and synthetic resin floor coverings
- 2005** Take-over of Siga Floor AG, Ruswil (Switzerland) and integration of the innovative switchTec® adhesive technology
- 2007** Introduction of the codex brand for ceramic tiles and natural stone; take-over of the wood flooring sanding machine manufacturer Herman Frank
- 2008** Take-over of RZ Chemie GmbH as well as Genial Produkte, suppliers of cleaning and care systems
- 2009** Acquisition of DS Derendinger AG in Thörishaus (Switzerland), Distributor for Machines and Tools
- 2010** Uzin is the first brand in the industry to get the EPD (Environmental Product Declarations) certification for a full product system.
- 2011** Uzin Utz AG's 100 year anniversary
- 2012** Acquisition of the flooring division of Collano Adhesives AG, Switzerland.
- 2013** Introduction of the sustainable product system Terra-Line and the UZIN ECO ID
- 2014** Opening of the new production facility of Wolff GmbH & Co. KG in Ilsfeld, Germany; Opening of the new factory of Unipro, Haaksbergen, Netherlands
- 2015** Grand Opening of Uzin Utz Manufacturing North America, Inc., Dover, Delaware, USA





# UZIN – GLOBAL PARTNER FOR FLOORING INSTALLERS.

Every day, craftsmen all over the world are confronted with flooring challenges. Each project is different and requires expertise, experience and individual solutions. UZIN is the ideal partner for flooring installers – worldwide. The following pages show a small selection of projects that floor layers have completed with UZIN.



OUR CUSTOMER, WYBE IEDEMA, DIRECTOR OF IEDEMA PROJECTS OFFERING IN THE NETHERLANDS, IS IN THE CENTRE WITH THE UZIN FLAG. BEHIND HIM STAND EMPLOYEES FROM OUR PRODUCTION, MARKETING, CUSTOMER SERVICE, SALES, TECHNICAL SERVICE, RESEARCH & DEVELOPMENT AND PRODUCT MANAGEMENT.





PIOTR BUDA, CO-OWNER OF WIMAT  
THE POLISH NATIONAL RADIO SYMPHONY ORCHESTRA IN KATOWICE, POLAND





PL



USA



CH



DE



NO



BE



UK



SI



FR




AT

# UZIN SYSTEM RECOMMENDATION




With an extensive range of products, it is often difficult to get an overview. UZIN has therefore put together a selection of products which cover your daily work requirements for 90 % of all applications. This makes searching for a product easier and allows you to focus on few products. With a 100 years heritage we continue to provide a first-class range of reliable, ecological and innovative products.

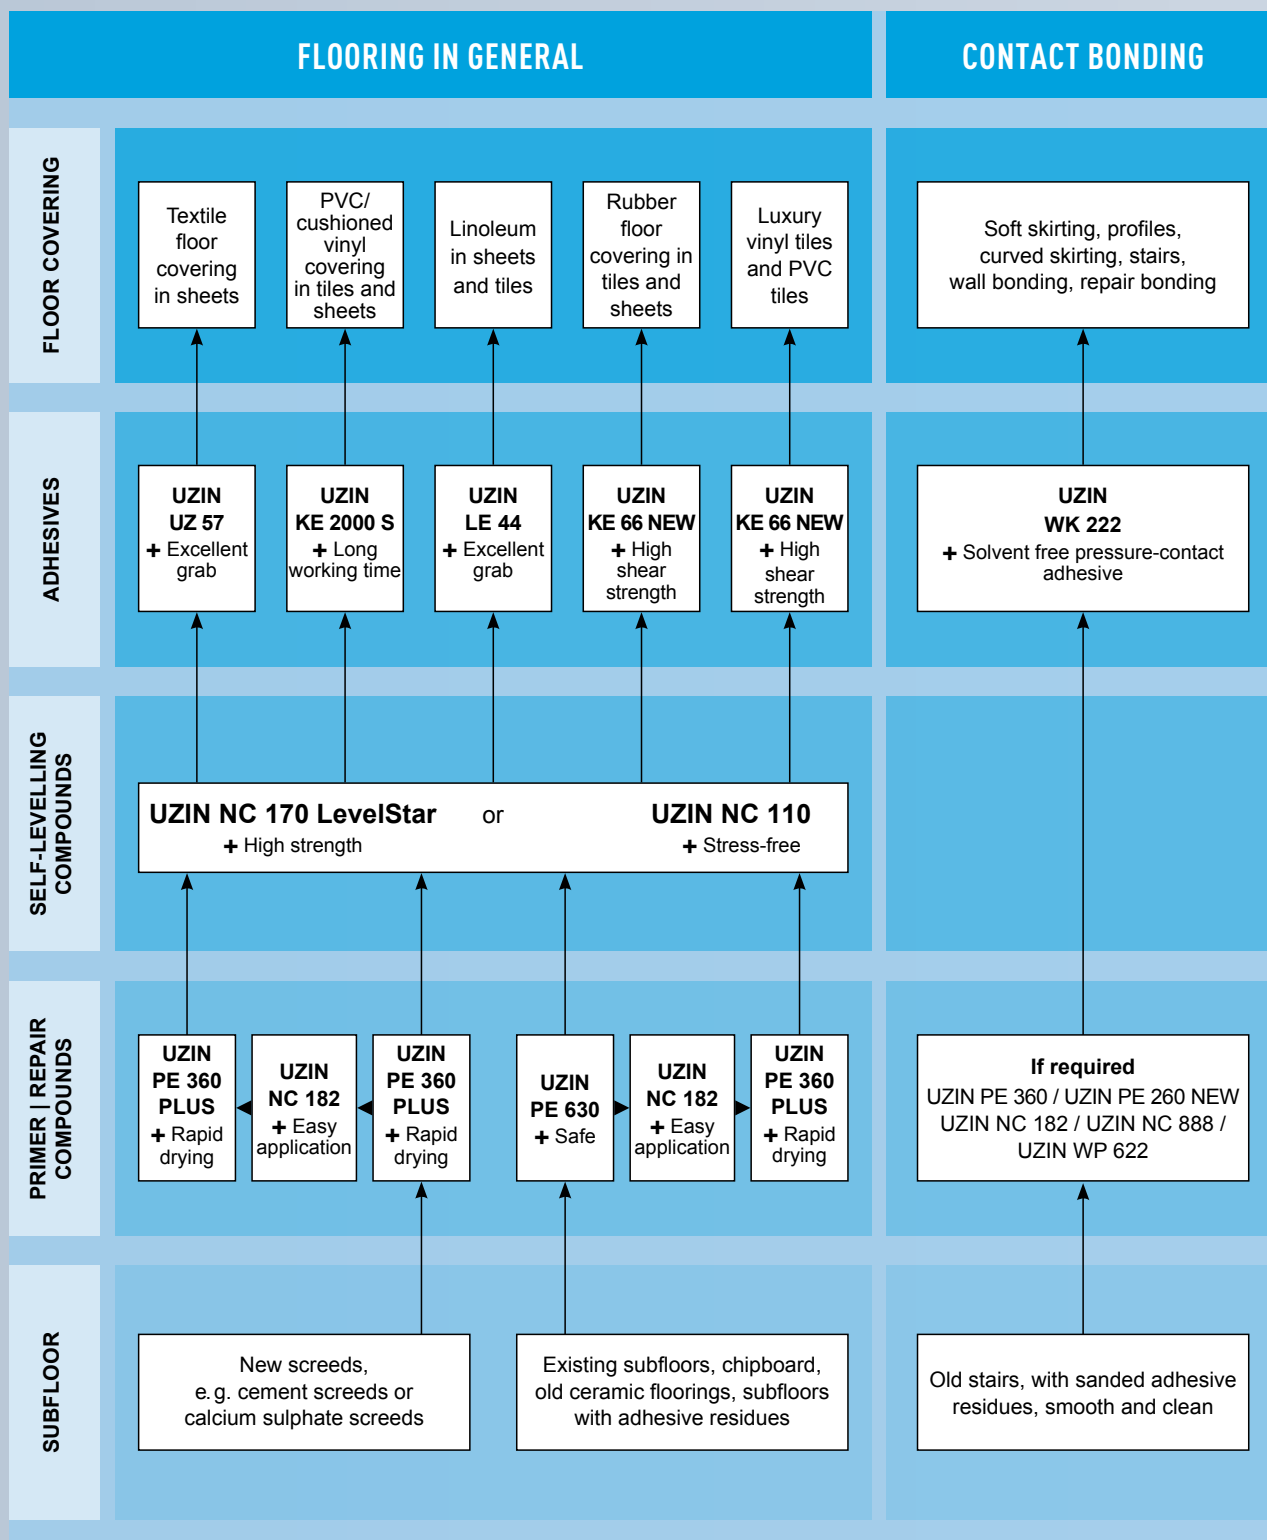

The recommendations described here should only be used as a guide. Detailed product data sheets are available which should be used as reference when using the products.



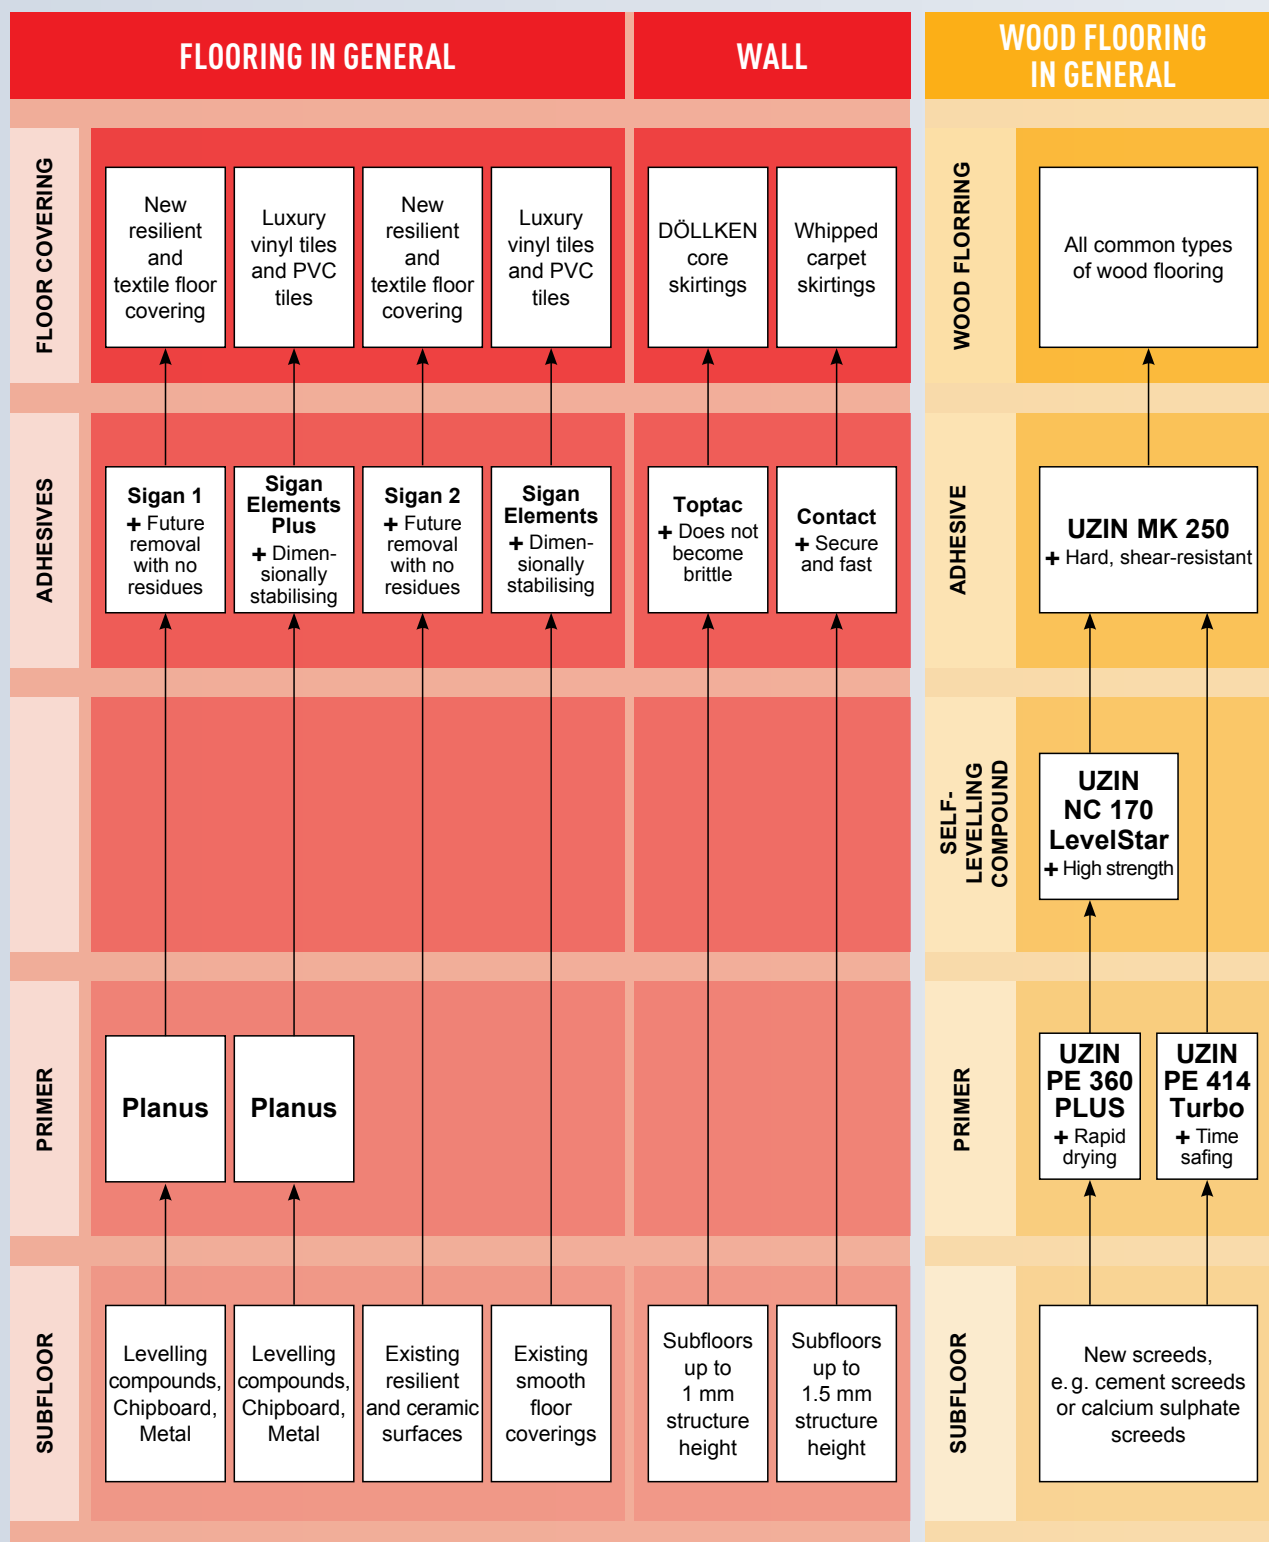

# NEW PICTOGRAMS USED ON UZIN PACKAGING

## Quickly find important product information




At UZIN, product information has been written in different languages, till now.

By using pictograms you, the user, can quickly and easily see all relevant information (e.g. the correct amount of water or consumption) on the packaging without long searching for the text.


The pictograms are arranged on the back of the packaging in a central block and independent of a particular language. The respective information is short, concise, and the visual illustration can be easily remembered.




## Used Pictograms: UZIN levelling compounds



The area of application:  
Suitable for interior use on the floor




The maximum shelf life is 6 months



Approx. 15 minutes pot life




Suitable for forklift traffic (very high point loads) from a thickness of min. 3 mm



Ready for foot traffic after approx. 60 minutes



Levelling compound suitable for pumping




Working temperature in the range of 15 °C – 25 °C or 60 °F – 77 °F




Grindable after 2 hours



Please refer to the UZIN Product Data Sheet before use




Levelling compound can be applied with a screed rake



Consumption per m² per mm thickness



Suitable for underfloor heating



Use 6 – 6.5 l of water per 25 kg of powder



Resistance to castors from a thickness of min. 1 mm






## Used Pictograms: UZIN primers



Please refer to the UZIN Product Data Sheet before use




Resistance to castors




Thoroughly vacuum before use




Suitable for underfloor heating




Frost-resistant, for exterior and interior use on floors and walls




Final strength




Shake before use




The maximum shelf life is 12 months



The area of application: Suitable for interior use on floors and walls




Ready for foot traffic




Application with roller / consumption




Stir before use




Working temperature in the specified range



Pot life



Avoid pooling




Can be applied with nylon fibre roller or TKB-B2 notched trowel


## Used Pictograms: UZIN adhesives




Please refer to the UZIN Product Data Sheet before use




Seam sealing




Suitable trowel notch sizes / consumption




Mixing ratio of component A to B




Working temperature in the specified range




Pot life



Working time




Open time




Resistance to castors



Suitable for underfloor heating



Load bearing



The maximum shelf life is 12 months

# Subfloor Construction | Screed



The brief descriptions of products should only be used as a guide.  
Detailed product data sheets for all products are available which should be used as reference when using the products.



## UZIN Turbolight®-System

### Rapid Construction and Renovation System

#### Rapid and flexible subfloor construction

Rapid system to create subfloors prior to the installation of all types of floor coverings

- For renovating uneven surfaces and pitted subfloors
- Flooring construction on critical subfloors

#### APPLICATIONS:

- On wooden subfloors and floorboards
- On concrete subfloors
- Able to meet the demands of home, office and assembly area use
- Bonded screed layer or as a separating layer

#### PROPERTIES:

- Complete system solution
- Rapid system
- Low specific weight
- Low distributed loads
- Good sound absorption
- High heat insulation properties
- Suitable for wet rooms



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
53402	UZIN SC 914 Turbo 80 l (21 kg) bag	–	15	2.6 kg/m <sup>2</sup> , 1 cm thickness	grey
47435	UZIN NC 195 25 kg bag	–	42	ca. 20 kg/m <sup>2</sup>	darkgrey
52154	UZIN RR 201 75 x 1,05 m	78.75 m <sup>2</sup>	24 rolls / 1890 m <sup>2</sup>	–	white
74667	UZIN RR 201 25 x 1,05 m	26.25 m <sup>2</sup>	48 rolls / 1260 m <sup>2</sup>	–	white

#### UZIN Turbolight®-System in practice



System for the creation of a subfloor that is quickly ready for covering with low area weight, low construction height and high load carrying capacity.

## UZIN SC 914 Turbo

## Rapid, Light Smoothing Mortar



### Rapid, light smoothing mortar for renovation

**Rapid, light smoothing mortar for the production of highly heat-insulating cement laying subfloors**

- Very easy to work, thanks to the smooth consistency
- For mixing and pumping using usual screed equipment
- Quickly ready for laying and highly heat-insulating

#### APPLICATIONS:

- Light smoothing layer with compound
- Light smoothing layer on separating layer
- As UZIN system component for fast construction and renovation
- As UZIN Turbolight®-System for all upper coverings
- Concrete ceilings
- Wooden beam ceilings and floors

#### PROPERTIES:

- Deformation-free and low-stress
- Very quickly ready for laying
- Very easy to work
- Low density
- Waterproof (note the moisture resistance of the upper levelling compound)
- For compound screeds and screeds on separating layer
- Interior use
- Low-chromate according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
53402	80 l (21 kg) bag	15	2.6 kg/m <sup>2</sup>	per 1 cm	grey

## UZIN SC 980

## Low-Shrink Rapid Cement



### For large cement screed areas without joints

**Accelerated special cement for producing low-shrinkage, dimensionally stable screeds – for interior and exterior use**

- Extremely low susceptibility to cracking, minimal need for joints or crack-inducing joints, construction site compatible
- Large areas in one piece, clean and low-cost screed surfaces
- Fast drying, therefore screed and flooring work possible within short time\*

#### APPLICATIONS:

- For producing bonded and floating screeds, screeds on separating membranes, heated screeds
- For constructing rapid screeds under time pressure
- For screeds with no dish or sinking at edges
- For large areas without joints up to 200 m<sup>2</sup> in one piece\*

#### PROPERTIES:

- Shrinkage and deformation reduced, low stress
- Very easy to work
- Short time till heat-up period
- Variable strength classification, CT-C25-F4 up to CT-C40-F6
- Interior and exterior use
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)

\*see Product Data Sheet for drying rates

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
43723	25 kg bag	42	3.2 kg/m²	1 cm***	grey
52603	1000 kg Big Bag**	1 Big Bag			
** available on request		*** mixing ratio 1 : 5 respective C35-F5			







## Low-Shrink Rapid Cement

UZIN SC 970

### Consumption-optimised large cementitious screed areas without joints\*

Special cementitious binder for the economic fabrication of no-shrinkage, dimensionally stable rapid cementitious screeds

- Large-surface work without pre-determined breaking points, reduces costs/m<sup>2</sup> significantly
- Strength classification CT-C30-F5 at mixing ratio 1 : 6 facilitates very economic solutions
- Early heating and defined readiness for covering; follow-up work is therefore possible after a short period of time\*

#### APPLICATIONS:

- For the fabrication of floating screeds, screeds on separating layers and composite screeds, heated screeds
- For large areas without joints of 200 m<sup>2</sup>\*
- For screeds without curling and setting at the edges
- For the fabrication of screeds with fixed deadlines

\* For readiness for covering and field settings, refer to Product Data Sheet

#### PROPERTIES:

- Strength classification CT-C30-F5
- Low-tension and virtually free from deformation
- Very easy to process
- Early heating and defined readiness for covering
- Water resistant
- Interior use
- Low-chromate according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
73126	25 kg bag	42	2.6 kg/m <sup>2</sup>	1 cm**	grey

\*\*mixing ratio 1 : 6 respective C30-F5

## Rapid Screed Cement

UZIN SC 960

### Screed can be covered after one day\*

Special cement binder for producing very rapid drying cement screeds – interior and exterior

- Very rapid setting and drying, saves time and allows fast continuation of work
- Adjustable mix ratio, versatile

#### APPLICATIONS:

- For producing bonded and floating screeds, screeds on separating membranes or heated screeds
- For screed work under time pressure
- For early installation of floor coverings

\* see Product Data Sheet for drying rates

#### PROPERTIES:

- Water and frost resistant
- Strength classifications CT-C25-F4 to CT-C40-F7
- Interior and exterior use
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
1177	25 kg bag	42	3.2 kg/m <sup>2</sup>	1 cm**	darkgrey

\*\*mixing ratio 1 : 5 respective C35-F6

## Rapid Screed Cement

UZIN SC 966

### Screed pre-mixed for repair work

Pre-mixed rapid screed mortar with very rapid drying – interior and exterior

- Mixes only with water, totally reliable in use
- Ideal for small areas, no waste material
- Very rapid setting and drying, saves time

#### APPLICATIONS:

- For producing bonded and floating screeds, screeds on separating membranes or heated screeds
- For producing low-slump repair mortars
- For screed work under time pressure

\* see Product Data Sheet for drying rates

#### PROPERTIES:

- Water and frost resistant
- Can be covered after 1 day\*
- Strength classifications CT-C35-F6
- Interior and exterior use
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
12971	30 kg bag	36	20 kg/m <sup>2</sup>	1 cm	grey

## UZIN SC 910

## Special Binder For Specified Styrofoam Granulates



### Special Screed UZIN SC 910

Special binder for the fabrication of dimensionally stable light levelling mortar in interior and wet areas in conjunction with the UZIN Turbolight®System

- Rapid drying also with high thicknesses, saves setting times
- Low-tension, therefore securely usable
- For certified Thermo Zell and Diaperl Styrofoam granulates

#### APPLICATIONS:

- For the fabrication of dimensionally stable light levelling mortars with high compressive strength
- For light levelling mortar in the thickness range from 0.5 cm to 30 cm
- For the fabrication of light levelling mortars for the UZIN Turbolight® System in combination or on separating layer
- Interior and wet areas

#### PROPERTIES:

- Very easy to process
- For mixing and pumping using common screed equipment
- Ready for covering for UZIN NC 195 after 2 days (20 °C / 65 % rel. humidity)
- Low-tension
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
74505	25 kg bag	42	1 bag per 200 l Styrofoam	grey
74506	900 kg Big Bag*	1 Big Bag	see Product Data Sheet UZIN SC 910	grey

\*available on request



## UZIN SC 993

## Cementitious Coating



### Finishing areas with heavy use economically

Self-levelling cementitious coating for industrial and commercial areas, thicknesses from 4 to 10 mm

- Superior flow characteristics, therefore best installation results
- Best processing properties

#### APPLICATIONS:

- For the fabrication of wear layers, in industrial and commercial areas, without top covering
- For the fabrication of highly wear-resistant, slip-resistant (R 10) as well as de-icing salt-resistant coating
- On subfloors with a surface tensile strength of at least 1.5 N/mm<sup>2</sup>
- Surface treatment: see Product Data Sheet RZ Turbo Protect
- Interior use

#### PROPERTIES:

- Superior flow characteristics
- Coating can be used directly
- High load-capacity
- Abrasion resistance A6 according to EN 13813
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
74871	25 kg bag	42	6.8 kg/m <sup>2</sup> 17.0 kg/m <sup>2</sup>	4 mm 10 mm	dark grey







## Cementitious Thin Screed

**UZIN SC 995**

### Low-stress cementitious thin screed for commercial areas

Self-levelling cementitious thin screed for the fabrication of bonded thin screeds and screeds on separating membranes

- Low-tension, reliable use also with high thicknesses
- Rapid drying also with high thicknesses, saves long setting times
- For low-thickness heating systems

#### APPLICATIONS:

- For the fabrication of thin bonded screeds and thin screeds on separating layers
- For normal wear in residential and commercial areas
- For thicknesses from 3 mm - 30 mm
- For embedding thin layer hot-water underfloor heating systems
- As support layer for the UZIN Turbolight® System

#### PROPERTIES:

- For textile / resilient floor covering, prefinished wood flooring and ceramic tiles / natural stones
- Strength classification CT-C25-F5
- Low-tension
- Suitable for chair castors
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
74810	25 kg bag	42	1.7 kg/m²	1 mm	grey

## Calcium Sulphate Thin Screed

**UZIN SC 997**

### Practically tension-free calcium sulphate thin screed for commercial areas

Self-levelling calcium sulphate thin screed for the fabrication of bonded screeds and screeds on separating layers especially with renovation work

- Practically tension-free, reliable use also with high thicknesses
- Very broad range of application from 3 - 50 mm thickness, facilitates storage
- Ideal for low-thickness heating systems

#### APPLICATIONS:

- For the fabrication of thin bonded screeds and thin screeds on separating layers
- For interior areas with normal wear in thicknesses from 3 mm - 50 mm
- For embedding thin layer hot-water underfloor heating systems
- For renovation work on subfloors sensitive to tension

#### PROPERTIES:

- For normal wear in residential and commercial areas
- For textile / resilient floor covering and ceramic tiles / natural stones
- Strength classification CA-C25-F5
- Suitable for chair castors
- Levelling compound on calcium sulphate base



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
74807	25 kg bag	42	1.8 kg/m²	1 mm	cream-white

# Subfloor Preparation



The brief descriptions of products should only be used as a guide.  
Detailed product data sheets for all products are available which should be used as reference when using the products.



## UZIN PE 360 PLUS

### Ready-to-use Primer

Reduces surface absorbency

#### Priming of absorbent screeds

Dispersion primer for absorbent subfloors, screeds and concrete floors

- Short drying times, time-saving
- Ready to use, avoids mixing errors
- Increases bond-strength and reliability

#### APPLICATIONS:

- For mineral levelling compounds
- On new subfloors, e.g. calcium sulphate screeds
- On concrete (dry)
- On levelling compounds

#### PROPERTIES:

- Penetrates into the subfloor
- Binds surface dust
- High-speed construction product
- Reduces surface absorbency
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
77299	10 kg CUBE it simple	–	72	80 – 150 g/m²	milk-blue
65874	5 kg CUBE it simple	–	128		
65873	1 kg can	12	360		

### UZIN PE 360 PLUS in practice



#### Drying times:

Leave to dry to a clear, transparent and almost tack-free film.

Cement-based subfloors:	approx. 30 Minutes
Calcium sulphate and gypsum subfloors, plaster:	approx. 60 Minutes
Subfloors with weak absorbency, e.g. old adhesives:	approx. 60 Minutes
UZIN gypsum-based compounds on calcium sulphate screeds:	approx. 30 Minutes

#### How does the Primer UZIN PE 360 PLUS work?

- Prevents water in the levelling compound being drawn out too quickly
- Increases the bond-strength between screed and levelling compound

## UZIN PE 280

## Super-Fast Primer



### Bonding agent for refurbishments

Dispersion primer with carbon technology for smooth and dense surfaces

- Ready to use and rapid drying, therefore ideal for work under time pressure
- Rough and solid surface, ideal connection between subfloor and levelling compound

#### DRYING TIMES:

- On dense and low absorbency surfaces: approx. 45 minutes
- On UZIN EP-Primers: approx. 45 minutes

#### APPLICATIONS:

- Mineral-based levelling compounds
- On dense and smooth surfaces or existing surfaces
- On existing surfaces in need of refurbishment, e.g. on waterproof residues of adhesives and levelling compounds
- On mastic asphalt that is old or not gritted
- On magnesia- or stone-wood-screeds
- On fixed, basic cleaned and grinded coatings

#### PROPERTIES:

- Film-forming
- Bonding agent on dense surfaces
- Rough surface due to the carbon technology
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
47523	12 kg oblong drum	–	50	70 – 150 g/m <sup>2</sup>	ochre
47522	5 kg oblong drum	–	80		
53978	1 kg drum	12	288		



## NEW UZIN PE 260 NEW

## Multipurpose Primer



### Dispersion primer for existing subfloors in renovation work

- Highly concentrated and can be diluted with water, therefore can be used on the widest variety of surfaces

#### DRYING TIMES:

- On dense and low absorbency surfaces: approx. 1 hour
- On absorbent surfaces (diluted): approx. 30 minutes

#### APPLICATIONS:

- For mineral levelling compounds
- On wooden surfaces as well as dense and low-absorbency surfaces
- On existing subfloors, e.g. old adhesives

#### PROPERTIES:

- Film-forming
- Highly concentrated
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
6367	10 kg CUBE it simple	–	72	40 – 150 g/m <sup>2</sup>	white
6368	5 kg CUBE it simple	–	128		
6951	1 kg can	12	360		



ÖKOLINE



## UZIN PE 630

### 2-Component Trowel-Applied Primer

Quick  
drying

#### Fast and reliable priming on jointed subfloors Dispersion-Cement Filler-Primer

- Rapid primer, waiting time is reduced
- Primer and filler in one, saves time
- Ideal on jointed surfaces, prevents cracking of the levelling compound

#### APPLICATIONS:

- For mineral levelling compounds
- For surfaces in renovation projects
- On all wooden subfloors, e.g. floor-boards
- On dense and smooth surfaces, e.g. ceramic tiles
- On old floor coatings

#### PROPERTIES:

- Fills, seals and smoothes in one application
- Flexible when set
- High-speed construction product
- Hydraulic setting
- Interior use
- Solvent-free
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
36612	A+B 16 kg drum	24	100 – 600 g/m <sup>2</sup> / trowel	dark grey

### UZIN PE 630 in practice




On floorboards, the viscous primer that is usually applied with a smoothing trowel as shown, demonstrates its advantages the best. The levelling compound does not "run away" and is ready for selflevelling with no further treatments.

#### Drying times:

Wooden subfloors, adhesive residues	40 – 60 minutes
Dense, non-absorbent surfaces	90 – 120 minutes

#### UZIN system recommendation for the installation of linoleum on old floorboards

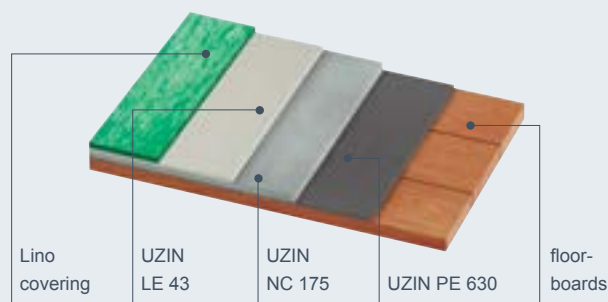



## UZIN PE 425

## 2-Component Epoxy Penetrating Primer



### Reinforcing brittle screeds

**Water-based EP primer concentrate to reinforce brittle, porous mineral-based screeds**

- Reinforcement of dilapidated screeds in renovation work; also of sand-shedding new screeds or screeds with inadequate strength
- Can avoid the removal of strong ailing screeds, saves time and money

### DRYING TIMES:

- 1. coat: 1 – 2 hours
- 2. coat: 12 – 48 hours

### APPLICATIONS:

- For reinforcement of unstable or porous old cementitious screeds
- For reinforcement of sand-shedding cementitious screeds
- For impregnation of screeds
- For subsequent levelling work in connection with UZIN PE 280 for the construction of ready for covering subfloors
- For direct bonding of wood flooring with UZIN reactive resin adhesives

### PROPERTIES:

- Deeply penetrating epoxy resin
- Excellent reinforcing effect
- Can be smoothed over in connection with UZIN PE 280
- Direct bonding with UZIN reactive resin adhesives
- Application diluted with water
- Diffusive
- Solvent-free
- Interior and exterior use



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
64968	A/B 6 kg drum	24	1. coat: 50 – 200 g/m <sup>2</sup> (concentrate) 2. coat: 50 – 150 g/m <sup>2</sup> (concentrate)	transparent / white

# REACTION RESIN PRIMER

## UZIN PE 414 Turbo

## 1-Component PUR Rapid Primer



### Fast and reliable priming

**One-component reaction resin primer for wood flooring and floor covering work**

- No mixing, fast, high coverage and reliable

### DRYING TIMES:

- 1. coat: approx. 1 hour
- 2. coat: approx. 12 hours

### APPLICATIONS:

- For priming under reaction resin wood flooring adhesives
- On cement- or calcium sulphate-screeds, concrete, etc.
- On existing surfaces, e.g. well-bonded adhesive residues
- As a barrier against moisture up to 4 CM-%
- For smoothing compounds when grit-binding with UZIN Quartz Sand 0.8 or UZIN PE 280

### PROPERTIES:

- Rapid drying
- Thin consistency
- Good penetration
- Neutral odour
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
41364	12 kg canister	60	approx. 50 g/m <sup>2</sup> / squeegee trowel	brown
41365	6 kg canister	60	80 – 150 g/m <sup>2</sup> / UZIN Nylon fibre roller	brown



## Dispersion Moisture Barrier

UZIN PE 400

**Dispersion primer for rapid blocking of unheated cement screeding to a maximum residual moisture of 3 CM-%**

- One-component product, ready-to-use
- With a drying time of only 3 hours the fastest barrier system, time and cost advantage for craftsmen and building owner

### DRYING TIMES:

- 1. coat (diluted): approx. 1 hour
- 2. coat: approx. 2 hours

### APPLICATIONS:

- For the blocking of increased residual moisture to 3 CM-%, in case of unheated cement screeding
- For the subsequent levelling work with UZIN levelling compounds / wood flooring levelling compounds

### PROPERTIES:

- Without quartz sand grit binding
- Low total consumption
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
52391	12 kg canister	63	1 <sup>st</sup> application: 60 – 70 g/m <sup>2</sup> 1:1 diluted 2 <sup>nd</sup> application: 120 – 130 g/m <sup>2</sup> pure	cream

## 2-Component Epoxy Moisture Barrier

UZIN PE 480

### For damp subfloors

**Epoxy resin primer for damp-proofing on subfloors with very high residual moisture**

- Saves moisture-testing on very damp, cement-based subfloors; does away with testing costs

### DRYING TIMES:

- Foot traffic / further coating: 12 – 24 hours
- Final strength: 3 – 5 days

### APPLICATIONS:

- For mineral levelling compounds and mortars
- As a barrier against very high moisture content on all moisture-resistant subfloors
- No limitation on maximum residual moisture value, not on standing water

### PROPERTIES:

- Heaviest-duty performance
- Good filling capacity due to high viscosity
- Best attachment even on wet surfaces
- Interior and exterior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour	Farbe
17340	A/B 10 kg drum	–	30	250 – 500 g/m <sup>2</sup>	yellowish
74875	A/B 5 kg drum	–	60		

## 2-Component Epoxy Primer-Sealer

UZIN PE 460

### A reliable barrier against residual moisture

**Epoxy primer for damp or weak surfaces**

- Allows fast installation on cement-based surfaces, reducing waiting time and costs

### DRYING TIMES:

- Foot traffic / further coating: approx. 8 hours
- Final strength: 3 – 5 days

### APPLICATIONS:

- For mineral levelling compounds and mortars
- As a barrier against moisture up to 5 CM-%
- For surface hardening of "worn out" screeds
- On moisture-resistant subfloors requiring renovation

### PROPERTIES:

- Approx. 20 % faster cure
- Reduced odour during application
- System component in PAH decontamination
- Interior and exterior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour	Farbe
8451	A/B 10 kg drum	–	30	200 – 600 g/m <sup>2</sup>	brownish
8466	A/B 5 kg drum	–	60		
79714	A/B 0,75 kg can	7	210		

## UZIN NC 182 Low-Slump Smoothing Compound

Quick  
drying, even  
at low  
temperatures

### Spreads to „feather edge“

Low-slump, fine and very fast setting cement smoothing compound for any thickness

- Universal use as a repair mortar
- Rapid setting, time saving
- No marks under visually sensitive coverings from coarse aggregate

### APPLICATIONS:

- For filling holes and surface damage
- For levels adjustment and patch smoothing work
- For fine skimming or area scratch-coating
- On all surfaces as a repair-, filling- and smoothing-compound

### PROPERTIES:

- Ready for covering after 60 min.
- Hydraulically setting
- From feather-edge to high thicknesses
- Ideal working properties
- Fine grain, eliminates smoothing edges
- High-speed construction product
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)



with  
handle



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption / Thickness	Colour
1268	25 kg bag	–	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm 15.0 kg/m <sup>2</sup> / 10 mm	grey
68546	20 kg bag	–	54		
37259	12.5 kg bag with carry-handle	–	60		

### UZIN NC 182 in practice



### Typical applications that are also possible with UZIN NC 182:

- Repairs on stairs and landings
- Full area skim-coating on old subfloors with well-bonded, waterproof residues of adhesives and levelling compounds, even down to "nil thickness"
- Filling of surface imperfections up to full screed depth
- As a system component in high-speed construction

By applying UZIN NC 182, levels variations in the subfloor can be smoothed out effortlessly and it is rapid-drying.



# REPAIR SMOOTHING COMPOUNDS



## Low-Slump Gypsum Repair Compound

UZIN NC 118

### A reliable system companion to self-levelling gypsum compounds

Low-slump, calcium sulphate based smoothing compound

- Stress-free, therefore high reliability

#### APPLICATIONS:

- For filling holes and surface damage
- For patching and localised repairs
- On mineral surfaces, especially gypsum-based subfloors

#### PROPERTIES:

- Adjustable consistency
- Stress-free
- Interior use



Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness		Colour
12382	25 kg bag	42	1.5 kg/m <sup>2</sup>	1 mm	cream white
			4.5 kg/m <sup>2</sup>	3 mm	
			15.0 kg/m <sup>2</sup>	10 mm	

## Turbo Skim and Repair Compound

UZIN NC 888

### Rapid patching and smoothing compound

- Very fine, smooth and extremely rapid setting compound on old adhesive residues without primer and for smoothing out to a feather-edge

#### APPLICATIONS:

- New or old cement levelling compounds
- Existing subfloors with well-bonded, waterproof residues of adhesives and levelling compounds
- Dense, mineral subfloors
- Large and small format tiling and natural stone
- Dry screed materials, chipboard and OSB boards
- All standard construction screeds, concrete or other subfloor types
- Also for use as a "low-slump smoothing compound" on old adhesive residues and for smoothing out to a feather-edge
- Heavy wear in domestic and commercial locations
- Warm water underfloor heating systems
- As a system component in high-speed construction

#### PROPERTIES:

- From a "feather-edge" up to 4 mm thickness
- No primer required
- Extremely rapid drying due the chemical conversion of the mix water
- Excellent surface finish extended
- Extended shelf life in original unopened drum
- Profit yielding
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness		Colour
56118	9 kg bucket (2 x 4.5 kg bag)	24	1.1 kg/m <sup>2</sup>	1 mm	grey
			4.4 kg/m <sup>2</sup>	4 mm	

## Flex Surfacer Paste

UZIN NC 405

### Flexible dispersion compound for surfaces with deflection

- Protects new coverings from discolouration from the subfloor

#### APPLICATIONS:

- On insulating underlays and on old cushioned vinyl
- As a plasticiser barrier on PVC flooring

#### PROPERTIES:

- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
6610	18 kg drum	33	250 – 1200 g/m <sup>2</sup>	light grey

# WALL LEVELLING COMPOUND

**NEW** UZIN WP 622

**Cementitious wall levelling compound**



## Perfect preparation for bonding deflector walls with UZIN WK 222

Wall levelling compound for thicknesses up to 10 mm

- Short drying time that allows a rapid further processing
- Balanced strength for a good sandability, time and powersaving further processing

### APPLICATIONS:

- Universal patching compound for walls and ceiling
- For the subsequent bonding of deflector, textile and resilient coverings
- For the subsequent painting of dispersion and latexpaints
- On all absorbent and non-absorbent surfaces

### PROPERTIES:

- Very good mixing behavior
- Easy to apply
- Good filling capacity
- Good grindable
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness		Colour
79712	25 kg bag	42	1,3 kg/m <sup>2</sup>	1 mm	grey
			3,9 kg/m <sup>2</sup>	3 mm	
			13,0 kg/m <sup>2</sup>	10 mm	



## UZIN NC 170 LevelStar Premium Levelling Compound

### Subfloor refurbishment with the newest levelling compound technology

Self-levelling, extremely smooth cement-based levelling compound with Level Plus Effect for every layer thickness range

- Extremely good flow characteristics, even better result of laid covering surfaces
- Best absorbency in spite of high strength, time advantage at bonding of high-quality floor coverings
- Very smooth surface, time and costs savings as well as optimal result of laying

#### APPLICATIONS:

- For high quality smoothing and levelling work prior to all types of floor covering work, wood flooring, ceramic and natural stone coverings
- On new subfloors, e.g. cement screeds
- On existing subfloors in need of renovation, e.g. on waterproof adhesive and levelling compound residues

#### PROPERTIES:

- No thickness limitations
- Highly plasticised
- Very easy adhesive application
- Shear-resistant under wood flooring
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsizes	Shipping Unit / Box	Shipping Unit / Pallet	Consumption / Thickness	Colour
1062	25 kg bag	–	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm 15.0 kg/m <sup>2</sup> / 10 mm	grey
1266	25 kg bag	–	42		
70691	20 kg bag	–	54		
21446*	1000 kg BigBag	–	1 BigBag		

\*available on request

### UZIN NC 170 LevelStar in practice



#### What is achieved by applying smoothing compound over screeds and existing floor surfaces?

- Consolidating uneven and rough screeds to give a uniformly smooth, consistent and fully prepared surface
- Achieving flat surfaces that not only meet DIN 18 202 but also the essential needs of the surface covering
- Achieving the optimum, system-compatible setting performance of modern, water-based dispersion adhesives
- Achieving consistently absorbent surfaces for overall strong adhesion of coverings with no bubbling
- Producing fully prepared surfaces in the refurbishment of old floor finishes and subfloors



# SELF-LEVELLING COMPOUNDS

## UZIN NC 160

## Smoothing Compound



### Surface preparation in project work

Self-levelling cement flooring compound for thickness up to 20 mm

- Easy to grind despite high strength, perfect in project work

#### APPLICATIONS:

- For smoothing and levelling prior to bonding textile and resilient coverings
- On new subfloors, e.g. cement screeds
- On existing subfloors in need of renovation

#### PROPERTIES:

- Easy to rub down
- Very good absorbency
- Interior use
- Low- chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
11170	25 kg bag	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm 15.0 kg/m <sup>2</sup> / 10 mm	grey
36056	25 kg bag	42		
70690	20 kg bag	54		
77204*	1000 kg BigBag	1 BigBag		

\*available on request



## UZIN NC 150

## Levelling Compound



### Economical surface preparation

Self-levelling cement flooring compound for thickness up to 10 mm

- Economical and efficient for standard levelling work

#### APPLICATIONS:

- For standard preparation work prior to floor covering installation
- On new subfloors, e.g. cement screeds
- On existing subfloors in need of renovation

#### PROPERTIES:

- Easy to rub down
- Good strength properties
- Interior use
- Low- chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
55839	25 kg bag	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm 7.5 kg/m <sup>2</sup> / 5 mm	grey



## UZIN NC 145

## Levelling Compound



### Cost-effective surface preparation

Self-levelling cement flooring compound for thickness up to 4 mm

- Economical surface preparation
- For standard surface preparation prior to floor covering installation

#### APPLICATIONS:

- On new subfloors, e.g. cement screeds
- On existing surfaces for refurbishment, e.g. over water-resistant residues of adhesives and levelling compounds

#### PROPERTIES:

- Excellent flow properties
- Good strength performance
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
1145	25 kg bag	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm	grey





## Rapid Levelling Compound

## UZIN NC 172 BiTurbo

### Extremely rapid drying for fast installation

Extremely rapid drying, self-levelling cement compound with the Level Plus Effect for virtually all areas of use, all subfloor types and at any thickness

- No primer required in most cases
- Very smooth surface finish, therefore lower adhesive consumption and no grinding needed in most cases

#### APPLICATIONS:

- For fast installation of e.g. all types of textile coverings, PVC / cushioned vinyl, PVC design flooring, linoleum, rubber sheet and tile coverings as well as ceramic tiling and natural stone
- For installation of wood flooring, polyolefin and polyurethane floor coverings after a drying time of 12 hours

#### PROPERTIES:

- Hydraulic setting
- No primer required in most cases
- Easy to rub down during initial cure-phase
- Very smooth surface finish
- Easy adhesive application
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
1179	25 kg bag	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm 15.0 kg/m <sup>2</sup> / 10 mm	darkgrey
55836	25 kg bag	42		
70210	20 kg bag	54		



## Fibre-Reinforced Levelling Compound

## UZIN NC 175

### Fibre-reinforced preparation for wood flooring

Self-levelling, fibre-reinforced cement levelling compound with Level Plus Effect for thickness up to 20 mm

- Extreme good flowing properties
- Stable even on „problem subfloors“, therefore high reliability
- Provides a stabilising levelling coat, no need to remove problem base constructions

#### APPLICATIONS:

- For smoothing and levelling prior to installation of floor coverings and wood flooring
- On wooden subfloors; rapid drying
- On jointed subfloors with slight deflection

#### PROPERTIES:

- Fibre-reinforced
- Very good absorbency
- Smooth surface in spite of fibre reinforcement
- Highly plasticised
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
1136	25 kg bag	42	4.5 kg/m <sup>2</sup> / 3 mm 7.5 kg/m <sup>2</sup> / 5 mm 15.0 kg/m <sup>2</sup> / 10 mm	grey



## Thin Screed Self Levelling Compound

## UZIN NC 195

### Surface levelling in thicker layers

Self-levelling, bonded cement flooring compound for thickness from 3 to 40 mm

- Ideal for smoothing over levels variations, versatile
- Good flow properties and pumpable, therefore time-saving

#### APPLICATIONS:

- For producing level, sound, fully prepared surfaces
- On cement screeds, concrete, terrazzo, stone and ceramics
- For renovation work over levels variations

#### PROPERTIES:

- Solid surface finish
- Interior use
- Low-chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
47435	25 kg bag	42	5.1 kg/m <sup>2</sup> / 3 mm 8.5 kg/m <sup>2</sup> / 5 mm 17.0 kg/m <sup>2</sup> / 10 mm	grey
33675*	1000 kg BigBag	1 BigBag		

\*available on request



## UZIN NC 110

### Gypsum-Based Levelling Compound

#### Stress-free levelling with the newest levelling compound technology

Self-levelling, calcium-sulphate based smoothing and levelling compound for thicknesses up to 50 mm

- Extremely good flow characteristics, even better result of laid covering surfaces
- Very smooth surface, time and costs savings as well as optimal result of laying
- Stress-free even at greater thickness giving the greatest possible reliability

#### APPLICATIONS:

- For textile and resilient floor coverings
- On new subfloors, e.g. calcium sulphate screeds
- On existing subfloors in need of renovation, e.g. on waterproof residues of adhesive and levelling compounds
- On mastic asphalt, stone-wood screeds and dry screed materials

#### PROPERTIES:

- Virtually stress-free
- For thicknesses up to 50 mm
- Easy adhesive application
- Interior use



Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
1272	25 kg bag	42	1.5 kg/m <sup>2</sup> / 1 mm 4.5 kg/m <sup>2</sup> / 3 mm 15.0 kg/m <sup>2</sup> / 10 mm	light-grey
70208	20 kg bag	54		light-grey
17099*	1000 kg BigBag	1 BigBag		light-grey

\*available on request

#### UZIN NC 110 in practice



With the use of UZIN NC 110, stress- and crack- free surfaces can be produced on subfloors that are problematic or weak or have several old bonded layers of flooring preparation materials.





## Fibre-Reinforced, Gypsum-Based Levelling Compound

UZIN NC 115

### Stress-free surface preparation with fibre-reinforcement

Self-levelling, fibre-reinforced flooring compound based on calcium sulphate for thickness from 2 to 30 mm

- Crack-free even on "problem subfloors", offers the highest reliability
- Minimises reflection of defects from the subfloors, avoids complaints

#### APPLICATIONS:

- For textile and resilient floor coverings
- On jointed wooden subfloors
- Thick-coat applications on floorboards, chipboard or other surfaces with deflection

#### PROPERTIES:

- Integrated fibre-reinforcement
- Stress-free
- Interior use



Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
12381	25 kg bag	42	4.5 kg/m <sup>2</sup> / 3 mm 7.5 kg/m <sup>2</sup> / 5 mm	light grey
70209	20 kg bag	54	15.0 kg/m <sup>2</sup> / 10 mm	

## Thin gypsum screed

UZIN NC 117

### Economical and nearly tension-free surface preparation

Self-levelling thin gypsum screed for thicknesses from 3 to 50 mm

- Compound installation or on separating layer nearly tension-free

#### APPLICATIONS:

- Suitable for creating compensation layers with medium absorbency for nearly tension-free levelling work
- Subsequent levelling work or a direct insalation of floor coverings or multi-layer wood floorings

#### PROPERTIES:

- Good flow
- Excellent flow and pumping properties
- Nearly tension-free
- No extension required
- Interior use



Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
73035	25 kg bag	42	5.4 kg/m <sup>2</sup> / 3 mm 9.0 kg/m <sup>2</sup> / 5 mm 18.0 kg/m <sup>2</sup> / 10 mm	light grey

# REACTION RESIN LEVELLING COMPOUNDS AND SCREEDS

## UZIN KR 410

## 2-Component PUR Levelling Compound



### Flexible and heavy-duty surface levelling

Self-levelling, flexible polyurethane flooring compound for any thickness

- Compensates for any movement in the subfloor, therefore extremely reliable
- Especially for resilient floor coverings offering the highest loading possibilities

#### APPLICATIONS:

- For smoothing work on surfaces with deflection
- For sports flooring installations
- For mastic asphalt renovation, metal surfaces, etc.
- Can also be used as a primer\*

#### PROPERTIES:

- Excellent flow properties
- For exposure to any type of wear
- Interior use
- Solvent-free

\*as a primer together with UZIN Quartz Sand 0.8.

Article No.	Packsize	Shipping Unit / Pallet	Consumption / Thickness	Colour
8984	A/B 14 kg drum	30	1.6 kg/m <sup>2</sup> / 1 mm 4.8 kg/m <sup>2</sup> / 3 mm 8.0 kg/m <sup>2</sup> / 5 mm	yellow-brown



## UZIN ER 200

## 2-Component Epoxy Mortar Resin



### For producing epoxy screeds, mortars and levelling compounds

Reaction resin binder for producing resin / sand mixes

- Water- and solvent- free, rapid setting
- For the demands of industry and heavy loading, highest reliability

#### APPLICATIONS:

- For repair and installation mortars
- For chemical-resistant screeds
- For self-levelling, heavy-duty and chemical-resistant levelling compounds
- For mixing with UZIN XS or UZIN ES sand

#### PROPERTIES:

- Chemical-resistant
- Rapid setting
- Low-stress and low-shrinkage
- High abrasion resistance
- Interior and exterior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
10206	A/B 10 kg drum	30	see product data sheet	yellowish

## UZIN ES

## Special Fillers – Fine



Fire-dried quartz flour mix for producing reaction resin levelling compounds

- Pre-mixed

#### APPLICATIONS:

- For producing reaction resin levelling compounds with 2-Component Epoxy Mortar Resin UZIN ER 200

#### PROPERTIES:

- Interior and exterior use

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
10915	15 kg bag	67	see product data sheet for UZIN ER 200	light grey



# REACTION RESIN LEVELLING COMPOUNDS AND SCREEDS



## Special Fillers – Coarse

UZIN XS

Fire-dried quartz sand mix grade 0.1 – 3.2 mm for producing reaction resin screeds and mortars

- Pre-mixed

### APPLICATIONS:

- For producing reaction resin screeds and mortars with UZIN ER 200

### PROPERTIES:

- Interior and exterior use



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
13793	25 kg bag	40	see product data sheet for UZIN ER 200	light grey

## SUBFLOOR REPAIRS

## 2-Component Repair Resin

UZIN KR 516

### Low-odour sealing of cracks

Low-odour casting and bonding resin for the quick restoration of cracks as well as bonding, filling and repairs

- Versatile 2-component resin for repairing cracks and joints but equally suitable for bonding, filling and repairing mineral-based subfloors. It hardens particularly quickly and after 45 minutes it is firm enough to allow levelling or bonding work.

### APPLICATIONS:

- Sealing narrow and wide joints and cracks in screeds and concrete
- Bonding of angle rails, nailboards, profiles and rods from metal, wood or plastic, or similar
- Repairs on concrete, ceramics, stone, or similar
- Use as installation and repair resin in building construction

### PROPERTIES:

- Low odour
- Extremely fast setting
- Small amounts can be mixed
- No stirring tools required
- Adjustable consistency
- Interior and exterior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
70015	1 x 300 ml bottle A 1 x 300 ml bottle B	6 bottles A and 6 bottles B	36 boxes / 216 units	aprox. 100 ml per lin. m. for 4mm joint with	yellowish

## 2-Component Repair Resin

UZIN KR 416

### Strong resin repair of screed cracks

Low viscosity, multipurpose acrylic resin for repairs to screeds and concrete

- Ideal for fine joints and cracks, very rapid setting, no waiting time

### APPLICATIONS:

- For resin-bonding of joints and cracks
- As a poured filler for hollow-spots
- On all subfloor types as a repair material

### PROPERTIES:

- Supplied with corrugated screed-clamps
- Interior and exterior use
- Solvent-based



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
8217	A/B 0.75 kg can	12	30 boxes / 360 units	approx. 100 – 150 g per lin. m. for 4 mm joint width	yellowish



# SUBFLOOR REPAIRS

## Screed Anchors



**Corrugated, stainless steel clamps for strong stitch-bonding of screed cracks and joints**

- Ideal for stitch-bonding screed bays

### APPLICATIONS:

- For resin-bonding of joints and cracks
- For joining separate screed sections

### PROPERTIES:

- Will not rust, 6 x 70 mm
- Corrugated for ideal fixing

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
13878	100 pieces	100	–	approx. 3 – 5 per lin. m.	stainless steel

## UZIN RR 201

## Renovation Fleece



**Rescues extremely dilapidated subfloors**

**Fibreglass surface reinforcement composite system for extremely poor quality subfloors**

- Strengthens and stabilises problematic subfloors: it provides security
- Fibreglass reinforced = renovate quick and without removal of the subfloor

### APPLICATIONS:

- For use on old and cracked screed surfaces
- For use on old subfloors where the structure changes
- For use on timber floorboards
- For use on chipboard
- For use on pre-fabricated screed surfaces
- For use on twin-ply floor systems

### PROPERTIES:

- Extreme tensile strength, approx. 1700 N/mm<sup>2</sup>
- Modules with high elasticity
- Has a highly reinforcing effect
- Low panel thickness, from 5 mm
- Permanently alkali resistant
- Non-combustible (fire class A1)

Article No.	Length / Width	Shipping Unit / Roll	Shipping Unit / Palett	Colour
52154	75 x 1.05 m	78.75 m <sup>2</sup>	24 rolls / 1890 m <sup>2</sup>	white
74667	25 x 1.05 m	26,25 m <sup>2</sup>	48 rolls / 1260 m <sup>2</sup>	



## Crack Bridge

UZIN RR 203 NEW

NEW

### Renovate extreme cracks

Crack reinforcement composite system for cracks with a width between 3 – 5 mm

- Replaces angle grinding and casting of cracks: the product is free from noise, dust and odour
- Bridges problematic cracks, provides additional security

#### APPLICATIONS:

- For separating cracks, shrinkage cracks and movement joints
- For intersections in the case of old subfloors where the structure changes
- For use on screed surfaces
- For use on rough concrete
- For use on timber floorboards
- For use on pre-fabricated screed surfaces
- For use on twin-ply floor systems
- For use on insulation and stress relieving slabs
- In the case of exposure in residential, commercial and industrial areas

#### PROPERTIES:

- Extreme tensile strength, approx. 3500 N/mm<sup>2</sup> on the filament
- High level of stretch at breaking point, 2.4 %
- Deflects stress/load
- Permanently alkali resistant



Article No.	Length / Width	Shipping Unit / Box	Shipping Unit / Palett	Colour
79682	0,80 x 0,60 m panels	24 m <sup>2</sup> = 50 panels	25 boxes / 600 m <sup>2</sup>	white
79676	30 x 0,8 m roll	24 m <sup>2</sup>	33 rolls / 792 m <sup>2</sup>	

## Glass Fibre

UZIN Reinforcement Fibre

Alkaline resistant glass fibre for increasing the structural strength of self-levelling smoothing compounds

- Increases reliability on technically critical subfloors

#### APPLICATIONS:

- For unsound subfloors in renovation work
- Reduces cracking of the levelling compound when used on unsound subfloors

#### PROPERTIES:

- Easy to incorporate
- Interior use



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
11725	0.25 kg bag	5	–	1 bag = 250 g per 25 kg of levelling compound	white

# INSULATING AND INSTALLATION UNDERLAYS

NEW

UZIN Multimoll Top 4 NEW, Top 7, Top 12

Stress-Relieving Boards



## Renovating boards for problematic subfloors

### Stress-distributing underlay for bonded wood flooring and laminates

- Minimal thickness, ideal for renovation, separating and stress-relieving

#### APPLICATIONS:

- For all types of wood flooring
- For textile and resilient flooring, levelling recommended
- On mixed surfaces and subfloors susceptible to cracking

#### PROPERTIES:

- Stress-relieving
- Separates, reduces the shear forces from the wood flooring
- Increases underfoot and ambient comfort
- Interior use

Article No.	Article	Shipping Unit / Box	Shipping Unit / Pallet	Packsize / Thickness	Colour
79720	Top 4 NEW	9 m <sup>2</sup> = 15 panels	10 boxes / 90 m <sup>2</sup>	100 x 60 cm / 4 mm	white mottled
79721	Top 4 NEW	–	250 panels / 150 m <sup>2</sup>	100 x 60 cm / 4 mm	
79724	Top 7	5,4 m <sup>2</sup> = 9 panels	10 boxes / 54 m <sup>2</sup>	100 x 60 cm / 7 mm	
79726	Top 7	–	120 panels / 72 m <sup>2</sup>	100 x 60 cm / 7 mm	
79727	Top 12	3 m <sup>2</sup> = 5 panels	10 boxes / 30 m <sup>2</sup>	100 x 60 cm / 12 mm	

## UZIN RR 181

## Comfort Underlay



## Thermal and acoustic insulation for textile coverings

### Self-adhesive, easy-release underlay for textile floor coverings

- Self-adhesive, quick to install, saves time

#### APPLICATIONS:

- For new textile coverings bonded with dispersion adhesives onto the UZIN RR 181
- On absorbent and non-absorbent subfloors
- On PVC and cushioned vinyl flooring, linoleum, stone and ceramics
- In domestic areas only

#### PROPERTIES:

- Ideal for renovation work
- Easy to cut and install
- Flat surface ideal for adhesives
- Increases underfoot and ambient comfort
- 27 dB acoustic insulation improvement
- Interior use

Article No.	Length / Width	Shipping Unit / Roll	Shipping unit / Palett	Thickness	Colour
5031	22 x 1.37 m	30 m <sup>2</sup>	4 rolls / 120 m <sup>2</sup>	6.5 mm	anthracite

## UZIN RR 181 FR

## Flame-Retardant Comfort Underlay



## Thermal, accoustic and fire retardant insulation for textile coverings

### Flame-Retardant, self-adhesive, easy-release underlay for textile floor coverings

- Self-adhesive, quick to install, saves time

#### APPLICATIONS:

- For new textile coverings bonded with dispersion adhesives onto the UZIN RR 181 FR
- On absorbent and non-absorbent subfloors
- Special e.g. in Hotels

#### PROPERTIES:

- Ideal for renovation work
- Easy to cut and install
- Flat surface ideal for adhesives
- Increases underfoot and ambient comfort
- 27 dB acoustic insulation improvement
- Interior use

Article No.	Length / Width	Shipping Unit / Roll	Shipping unit / Palett	Thickness	Colour
67497	22 x 1.37 m	30 m <sup>2</sup>	4 rolls / 120 m <sup>2</sup>	approx. 6 mm	anthracite



# INSULATING AND INSTALLATION UNDERLAYS



## Insulating and Easy-Release Underlay

## UZIN RR 183 Ebofloor

### Fast renovation and insulation on existing floor finishes

Loose-laid and stabilising underlay for dimensionally stable textile, PVC and cushioned vinyl flooring

- Considerably improves acoustic and thermal insulation

#### APPLICATIONS:

- For textile, PVC and cushioned vinyl sheet flooring
- On existing finishes such as ceramics, wood flooring, PVC or linoleum
- If the new covering must be fully bonded but the old must not be damaged
- In domestic locations and exhibitions

#### PROPERTIES:

- Loose-laid, lies flat
- High dimensional stability
- Ideal surface for adhesives
- Leaves no residue when removed
- 27 dB acoustic insulation improvement
- Interior use



Article No.	Length / Width	Shipping Unit / Roll	Shipping Unit / Palett	Thickness	Colour
5045	25 x 2 m	50 m <sup>2</sup>	6 rolls / 300 m <sup>2</sup>	approx. 4 mm	green

## Stabilising Underlay

## UZIN RR 185

### Castor-resistant covering installation on an underlay

Flexible, loose-laid, stabilising and damp-proofing underlay

- Bond new floor coverings onto UZIN RR 185 with no damage to existing floor finishes

#### APPLICATIONS:

- For textile, PVC and cushioned vinyl flooring
- On existing floor finishes
- On screeds with high residual moisture\*
- On level surfaces that are oily or contaminated
- In domestic and commercial locations

#### PROPERTIES:

- Suitable for exposure to castor-wheels
- Stabilising, lies flat
- Minimal thickness
- Leaves no residue when removed
- Interior use

\* see Product Data Sheet



Article No.	Length / Width	Shipping Unit / Roll	Shipping Unit / Palett	Thickness	Colour
9378	25 x 2 m	50 m <sup>2</sup>	12 rolls / 600 m <sup>2</sup>	approx. 1,5 mm	grey

## Comfort Underlay

## UZIN RR 186 Eboflex

### Fast renovation on existing floor finishes

Flexible, loose-laid underlay as an interlayer when bonding dimensionally stable textile, PVC and cushioned vinyl flooring

- Allows installation of new coverings on old, no dirt and no noise

#### APPLICATIONS:

- For textile, PVC and cushioned vinyl flooring
- On existing PVC, cushioned vinyl and linoleum
- On existing wood flooring, stone and ceramics
- In domestic locations and exhibitions

#### PROPERTIES:

- Loose-laid, lies flat
- High dimensional stability
- Ideal surface for adhesives
- Leaves no residue when removed
- Interior use



Article No.	Length / Width	Shipping Unit / Roll	Shipping Unit / Palett	Thickness	Colour
12981	20 x 2 m	40 m <sup>2</sup>	24 rolls / 960 m <sup>2</sup>	approx. 1 mm	green



# INSULATING AND INSTALLATION UNDERLAYS

## UZIN RR 188

## Insulating Underlay



### Acoustic and thermal insulation

#### Bonded resilient underlay under textile coverings or wood flooring

- For renovation of old buildings and, in new-build, for optimum underfoot- and ambient comfort

#### APPLICATIONS:

- Under textile coverings
- Under tongue-and-groove wood flooring (only 2 and 3 mm underlays)
- On level surfaces and stairs
- On existing floor finishes (only when installing new textile coverings)

#### PROPERTIES:

- Easy to cut and install
- Lies perfectly flat
- Acoustically insulating
- Thermally insulating
- Interior use

Article No.	Length / Width	Shipping Unit / Roll	Shipping unit / Palett	Thickness	Colour
38016	50 x 1 m	50 m <sup>2</sup>	6 rolls / 300 m <sup>2</sup>	2 mm	grey-brown marbled
9177	40 x 1 m	40 m <sup>2</sup>	6 rolls / 240 m <sup>2</sup>	3 mm	
9175	30 x 1 m	30 m <sup>2</sup>	6 rolls / 180 m <sup>2</sup>	4 mm	
9176	20 x 1 m	20 m <sup>2</sup>	6 rolls / 120 m <sup>2</sup>	6 mm	



## UZIN RR 189 Plus FR

## Flame-Retardant Insulating Underlay



### Acoustic and thermal insulation under textile and PVC coverings

#### Flame-retardant, bonded resilient underlay under textile and resilient coverings

- For renovation of old buildings and, in new-build, for optimum underfoot- and ambient comfort

#### APPLICATIONS:

- For use in project work, e.g. hotels
- Under textile and PVC flooring and shock-absorbing wall coverings
- For wood and laminate flooring with tongue-and-groove joints
- On level surfaces, stairs and existing floor finishes

#### PROPERTIES:

- Easy to cut and install
- Lies perfectly flat
- Acoustically insulating
- Thermally insulating
- Interior use

Article No.	Length / Width	Shipping Unit / Roll	Shipping unit / Palett	Thickness	Colour
12312	40 x 1 m	40 m <sup>2</sup>	6 rolls / 240 m <sup>2</sup>	3 mm	grey-brown marbled
12315	30 x 1 m	30 m <sup>2</sup>	6 rolls / 180 m <sup>2</sup>	4 mm	



# INSULATING AND INSTALLATION UNDERLAYS



## Acoustic grade renovation panel

## UZIN RenoTop PLUS

### Fast renovation and insulation

Insulating and acoustic grade subfloor system for a variety of floor coverings

- Allows installation of new coverings on old, little dirt and scarcely noise
- For renovation of old buildings and, in new-build, for optimum ambient comfort

#### APPLICATIONS:

- For preparing a subfloor for the subsequent installation of floor coverings
- For textile-, design-, PVC-, cushioned vinyl-, rubber-, linoleum coverings and multi-ply wood flooring (max. 70 x 500 mm)
- Acoustically insulation under textile and resilient flooring
- On any sufficiently level, dry and solid surfaces
- Normal wear in residential and commercial areas, e.g. in office buildings, apartment buildings, etc.

#### PROPERTIES:


- Low panel thickness, from 10 mm
- Easy to cut and install
- After installing immediately ready for covering
- Ideal surface for adhesives
- Leaves no residue when removed
- Interior use



Article No.	Packsizes	Shipping Unit / Pallet	Size / Thickness	Colour
73446	2,88 m² = 4 Support panels, 4 Cover panels	21 packages / 60,48 m²	120 x 60 cm / approx. 10 mm	brown

## Half moon blade

Article No.	Packsizes
32760	Half moon blade



## Vapor retarder

## UZIN PE-Foil

### Wrinkle-free 200 micron PE vapor retarder under floating constructions


- Best processing and lying properties because of 2 m roll width without rebate

#### APPLICATIONS:

- As a vapor retarder under floating floor constructions e. g. UZIN RenoTop PLUS
- As a release layer under screeds
- As cover

#### PROPERTIES:

- 2 m roll width, without rebate
- SD-value  $\geq 100$  m
- Thermal Resistance approx. 0,0005 m²K/W
- Interior use



Article No.	Length / Width	Shipping Unit / Roll	Shipping Unit / Palett	Thickness	Colour
76874	2 x 50 m	100 m²	48 rolls / 4800 m²	200 micron	transparent

# Floor Covering Adhesives



The brief descriptions of products should only be used as a guide.  
Detailed product data sheets for all products are available which should be used as reference when using the products.



## Universal Pressure-Sensitive and Wet Adhesive

## UZIN KE 2000 S

### Time saving effect, reliable adhesion of resilient floor coverings

Adhesive for resilient floor coverings as well as universal adhesive for all common floor covering types

- Strong dispersion-based adhesive with latest raw material technology with shortest open time and nonetheless long installation time for application

#### APPLICATIONS:

- Textile floor coverings, light-weight needle punch floor covering or woven carpet
- PVC, cushioned vinyl floor coverings, also Luxury Vinyl Tiles
- Linoleum in sheets up to 3.2 mm
- On absorbent and non-absorbent subfloors
- On UZIN insulation and installation underlays
- High strain in residential, commercial and industrial areas

#### PROPERTIES:

- Odourless during and after processing
- Very easy to apply
- Short open time
- Long working time
- Good tack with stringing
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
10497	14 kg drum	33	180 – 200 g/m <sup>2</sup> / A5 200 – 280 g/m <sup>2</sup> / A1	cream-white
6771	6 kg drum	72	250 – 320 g/m <sup>2</sup> / A2 320 – 380 g/m <sup>2</sup> / B1	
64943	2 kg drum	150	450 – 500 g/m <sup>2</sup> / B2	



## Universal Adhesive

## UZIN KE 16

### Objectflooring economically and modern bonding

Dispersion-based adhesive for textile, PVC, cushioned vinyl floor coverings and linoleum

- Easy to spread and good tack with stringing for a secure bonding.

#### APPLICATIONS:

- Soft floor textile coverings with all common backings
- Light needle punch floor coverings
- PVC and cushioned vinyl flooring in sheets and tiles
- Linoleum in sheets up to 2.5 mm
- On absorbent levelled subfloors
- In domestic and commercial locations

#### PROPERTIES:

- Universal use
- Odourless during and after processing
- Very easy to apply
- Short open time
- Interior use
- Solvent-free



Article No.	Packsize	Shipping unit / Palett	Consumption	Colour
69343	14 kg drum	33	250 – 300 g/m <sup>2</sup> / A 1 300 – 350 g/m <sup>2</sup> / A 2	cream-white
69344	6 kg drum	72	350 – 450 g/m <sup>2</sup> / B 1 500 – 600 g/m <sup>2</sup> / B 2	
69345	2 kg drum	150		



## Universal PVC Adhesive

## UZIN KE 418

### Bonds PVC coverings economically

Solvent-free dispersion adhesive for PVC, cushioned vinyl and textile floor coverings

- Dispersion adhesive with low filler content for thin application in interior areas.

#### APPLICATIONS:

- For homogeneous and heterogeneous PVC and cushioned vinyl
- For carpets with PVC-, foam- and latex-backings
- For lightweight needlepunch flooring
- On absorbent levelled subfloors
- In domestic locations

#### PROPERTIES:

- Easy to spread, good initial grab
- Excellent adhesion
- High final strength
- Good resistance to plasticizers
- Solvent-free
- Interior use



Article No.	Packsize	Shipping unit / Palett	Consumption	Colour
5083	6 kg drum	72	300 – 350 g/m <sup>2</sup> / A 1 350 – 400 g/m <sup>2</sup> / A 2	cream-white
53950	18 kg drum	33	400 – 450 g/m <sup>2</sup> / B 1	



## UZIN UZ 57

### Universal textile adhesive

#### Universal adhesive for all resilient and textile floor coverings

- For almost all textile coverings, therefore truly universal
- Strong thread-formation, giving reliable adhesion

#### APPLICATIONS:

- For textile coverings with double backings
- For textile coverings with foam-, latex- or fleece- backings
- For woven goods, needlepunch and natural fibre carpets
- On absorbent, levelled subfloors
- On UZIN insulating and installation underlays

#### PROPERTIES:

- Easy to spread
- Quick initial grab
- Excellent thread-formation
- High early and final strength
- Interior use
- Solvent-free



ÖKOLINE



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
17339	14 kg drum	33	300 – 350 g/m <sup>2</sup> / A2 350 – 450 g/m <sup>2</sup> / B1 500 – 550 g/m <sup>2</sup> / B2	beige-white

#### UZIN UZ 57 in practice



Whether in project work or in domestic locations – for modern and fast installation of textile floor coverings, UZIN UZ 57 is always there.



The excellent thread-formation offers the installer the fastest initial grab and highest reliability.





## Premium Textile Covering Adhesive

UZIN UZ 88

**Reliable installation of textile coverings with maximum requirements on room air quality**

**Highly shear-resistant dispersion adhesive to create a healthy atmosphere**

- Hard adhesive serration, ideal for coverings with varying dimensional stability
- Extremely shear-proof, problem-solver for needle- punch coverings through reduction of seam shrinkage
- Healthy room climate due to low emissions
- For all needle-punch coverings, and particularly needle-punch coverings with reduced dimensional stability

### APPLICATIONS:

- For woven textile coverings of all types
- For Kugelgarn®
- For natural fibre coverings of sisal, coconut, jute, with coated, latexed backing
- For textile coverings designed for hospitals
- On even, absorbent, levelled subfloors

### PROPERTIES:

- Odorless during and after application
- Very high shear strength
- Hard adhesive grooves
- Minimises seam shrinkage
- 10 % lower consumption in comparison to adhesives containing resins
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
11723	14 kg drum	33	200 – 250 g/m <sup>2</sup> / A1 250 – 320 g/m <sup>2</sup> / A2 350 – 400 g/m <sup>2</sup> / B1 450 – 530 g/m <sup>2</sup> / B2	beige



## Special Textile Adhesive

UZIN UZ 90

**No problem for difficult coverings**

**Dispersion adhesive with powerful thread-formation for all types of textile floor coverings**

- Extremely high thread-formation giving reliable adhesion
- Very low consumption, less cost per m<sup>2</sup>

### APPLICATIONS:

- For all textile coverings
- Also for woven goods, needlepunch and natural fibre carpets
- Also on dense, non-absorbent subfloors
- On UZIN insulating and installation underlays

### PROPERTIES:

- Smooth to spread, lowest consumption
- Very fast grab
- Especially long open time
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
13896	14 kg drum	33	200 – 250 g/m <sup>2</sup> / A2 250 – 350 g/m <sup>2</sup> / B1 350 – 450 g/m <sup>2</sup> / B2	beige



## UZIN KE 2000 S

### Universal Pressure-Sensitive and Wet Adhesive

#### Time saving effect, reliable adhesion of resilient floor coverings

Adhesive for resilient floor coverings as well as universal adhesive for all common floor covering types

- Strong dispersion-based adhesive with latest raw material technology with shortest open time and nonetheless long installation time for application

#### APPLICATIONS:

- For homogeneous and heterogeneous PVC, cushioned vinyl floor coverings in sheets and tiles
- For rubber flooring in sheets, e.g. noraplan® up to 4 mm, including floor coverings with acoustics or foam underlay
- Chlorine-free resilient floor coverings, e.g. Upofloor LifeLine®
- PUR floor coverings in sheet up to 2.0 mm, e.g. WPT PURline®
- Flotex
- Wall coverings, e.g. PVC floor coverings in bathrooms

#### ALSO SUITABLE AS UNIVERSAL ADHESIVE FOR:

- Textile floor coverings, light-weight needle punch floor covering or woven carpet
- PVC, cushioned vinyl floor coverings, also Luxury Vinyl Tiles
- Linoleum in sheets up to 3.2 mm
- On absorbent and non-absorbent subfloors
- On UZIN insulation and installation underlays
- High strain in residential, commercial and industrial areas

#### PROPERTIES:

- Odourless during and after processing
- Very easy to apply
- Short open time
- Long working time
- Good tack with stringing
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
10497	14 kg drum	33	180 – 200 g/m² A5 200 – 280 g/m² A1	cream-white
6771	6 kg drum	72	250 – 320 g/m² A2 320 – 380 g/m² B1	
64943	2 kg drum	150	450 – 500 g/m² B2	

#### UZIN KE 2000S NEW in practice



Typical applications where it's possible to also use UZIN KE 2000 S in a different way:

- Adhesion of PVC floor coverings on dense, non-absorbent subfloors, e.g. UZIN KR 410, UZIN RR 185 or finishes, as long as the requirements are met.
- Repair work, e.g. elimination of bubbling in resilient floor coverings with UZIN KE 2000 S, a hot welding gun.

In large areas, the dependability of UZIN KE 2000 S shows itself best – especially significant are its proven adhesive power and the great reliability of the installation.



## Fibre-Reinforced Wet-Set adhesive

UZIN KE 66 NEW **NEW**

### Maximum requirements on dimensional stability

#### Fibre adhesive for rubber tile flooring

- Fibre-reinforced, fast and without crumpling, no pressure marks
- Now with „Saving-Time-Effect“: increased working time / same waiting time lead to an increased reliability

#### APPLICATIONS:

- For PVC-design floor coverings of all manufacturers
- For rubber flooring in tiles and sheets up to 4.0 mm
- For PVC floor coverings in tiles and sheets
- On levelled subfloors with good absorbency
- Very heavy demands at commercials or facilities

#### PROPERTIES:

- Odourless during and after application
- Excellent working properties
- Very low consumption
- Short waiting time
- Solvent-free

Improved working properties



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour	Colour
11722	14 kg drum	–	33	approx. 280 g/m <sup>2</sup> / trowel A2	cream-white
64886	6 kg drum	–	72	approx. 240 g/m <sup>2</sup> / trowel A1	cream-white

## Rapid Adhesive

UZIN KE 2428

### Fast and reliable adhesion of PVC flooring

#### Dispersion adhesive with very high bond-strength for PVC floor coverings

- Wet adhesive with high initial grab and strong thread-formation allowing fast work progress
- Short open time, time-saving

#### APPLICATIONS:

- For PVC and cushioned vinyl
- On absorbent, prepared surfaces
- On UZIN insulating and installation underlays

#### PROPERTIES:

- Excellent grab performance
- High final strength
- Excellent plasticiser resistance
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
5067	18 kg drum	33	250 – 300 g/m <sup>2</sup> / A1 300 – 350 g/m <sup>2</sup> / A2	cream-white

## 2-Component Polyurethane Adhesive

UZIN KR 430

### Bonds rubber flooring „hard as nails“

#### Flexible polyurethane adhesive for heavy-duty floor coverings

- Very high dimensional stability even with special covering materials
- Highest bond-strength, therefore extremely reliable
- For (almost) any loading, therefore universal applications

#### APPLICATIONS:

- For rubber flooring up to 10 mm thickness
- For rubber granulate or underlays
- Can also be used for linoleum
- On absorbent and non-absorbent surfaces
- In sports halls, industrial and heavy wear locations

#### PROPERTIES:

- No shrinkage
- Extremely high final strength
- High resistance to heat and cold
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
10493	A/B 12 kg tin drum	30	300 – 350 g/m <sup>2</sup> / A1 / A5	anthracite
8026	A/B 6 kg tin drum	60	300 – 350 g/m <sup>2</sup> / A2 / A3	
5047	A/B 2,5 kg tin drum	120	400 – 600 g/m <sup>2</sup> / B1 / B2 800 – 1300 g/m <sup>2</sup> / B3 / C1	





## UZIN KE 66 NEW

### Fibre-Reinforced Rubber Flooring and LVT Adhesive

Improved  
working  
properties

#### Maximum requirements on dimensional stability

##### Fibre adhesive for rubber tile flooring

- Fibre-reinforced, fast and without crumpling, no pressure marks
- Now with „Saving-Time-Effect“: increased working time / same waiting time lead to an increased reliability
- Due to new fibre technology also applicable with A1 notch trowel

##### APPLICATIONS:

- For PVC-design floor coverings of all manufacturers
- For rubber flooring in tiles and sheets up to 4.0 mm
- For PVC floor coverings in tiles and sheets
- On levelled subfloors with good absorbency
- Very heavy demands at commercials or facilities

##### PROPERTIES:

- Odourless during and after application
- Excellent working properties
- Very low consumption
- Short waiting time
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
11722	14 kg drum	33	approx. 280 g/m <sup>2</sup> / trowel A2 approx. 240 g/m <sup>2</sup> / trowel A1	cream-white
64886	6 kg drum	72		

#### UZIN KE 66 NEW in practice



UZIN KE 66 NEW offers absolute reliability in the laying of Luxury Vinyl Tiles. All types of surfaces, and particularly larger surfaces, can be laid without any problem. UZIN KE 66 NEW also complies with all requirements of EC 1 PLUS and the „Blue Angel“.



## Rapid Adhesive Extra

UZIN U 3000

### Fast and reliable adhesion of PVC flooring

Dispersion adhesive with very high bond-strength for PVC floor coverings

- Wet adhesive with high initial grab and strong thread-formation allowing fast work progress
- Short open time, time-saving

#### APPLICATIONS:

- For PVC and cushioned vinyl
- On absorbent, prepared surfaces
- On UZIN Multibase as well as UZIN insulating and installation underlays

#### PROPERTIES:

- Excellent grab performance
- High final strength
- Excellent plasticiser resistance
- Interior use
- Solvent-free



### Perfect combined packaging

#### 16 kg / 125 m<sup>2</sup> set (carton) includes:

- 10 kg UZIN U 3000 RollFix (oblong bucket)
- 6 kg UZIN U 3000 Primer (canister)
- 1 x UZIN nylon fibre roller 25 cm / 6 mm
- 1 x UZIN foam roller 25 cm / 20 mm
- 1 x UZIN roller handle
- 1 x UZIN brush



#### 8 kg / 60 m<sup>2</sup> set (oval bucket) includes:

- 5 kg UZIN U 3000 RollFix (canister)
- 3 kg UZIN U 3000 Primer (canister)
- 1 x UZIN nylon fibre roller 25 cm / 6 mm
- 1 x UZIN foam roller 25 cm / 20 mm
- 1 x UZIN roller handle
- 1 x UZIN brush



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
60640	16 kg / 125 m <sup>2</sup>	18	Primer: 50 g/m <sup>2</sup> UZIN foam roller 25 cm / 20 mm RollFix: 80 g/m <sup>2</sup>	Primer: white RollFix: light blue
60651	8 kg / 60 m <sup>2</sup>	24	UZIN Nylon-fibred 25 cm / 6 mm	

## UZIN LE 44 Linoleum Adhesive

Highly  
shear-resistant

### Fast and reliable adhesion of linoleum

Dispersion adhesive with highest dimensional stability for all linoleum coverings

- Hard adhesive ridges, can also be used for linoleum with variable dimensional stability
- Wet-bond adhesive, minimal open time, saves time
- Ideal for e.g. surface-bloomed linoleum coverings

### APPLICATIONS:

- For linoleum in sheets and tiles up to 4 mm thickness
- For corking underlay subfloors, as well as for the adhesion of linoleum on corking underlay
- On prepared and absorbent surfaces
- Very heavy demands at commercials or facilities e. g. hospitals or highly frequented shopping areas ect.

In system combination with linoleum covers from Armstrong DLW AG and Forbo Flooring GmbH, it provides verification of flame-retardant properties (DIN EN 13 501-1). Certificates can be requested from the floor covering manufacturer.

### PROPERTIES:

- Short open time
- Optimum adhesion properties
- Rapid force development
- Extremely shear-resistant adhesive grooving
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
6873	14 kg drum	33	approx. 400 g/m² / B1	light grey

### UZIN LE 44 in practice



UZIN LE 44 meets the high demands placed on linoleum installation in project work, e.g. hospitals, nurseries, office buildings, schools, etc.



## Premium Textile and Linoleum Covering Adhesive

UZIN UZ 88

**Reliable installation of textile coverings with maximum requirements on room air quality**

**Highly shear-resistant dispersion adhesive to create a healthy atmosphere**

- Hard adhesive serration and highly shear-resistant, ideal for coverings with varying dimensional stability
- Extremely shear-proof, problem-solver for needle- punch coverings through reduction of seam shrinkage

### APPLICATIONS:

- For linoleum sheets and tiles up to 4.0 mm
- For heavy wear in residential, commercial and industrial locations

### PROPERTIES:

- Odourless while and after application
- Very high shear-resistance
- Hard adhesive serration
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
11723	14 kg drum	33	200 – 250 g/m <sup>2</sup> / A1 250 – 320 g/m <sup>2</sup> / A2 350 – 400 g/m <sup>2</sup> / B1 450 – 530 g/m <sup>2</sup> / B2	beige



## Linoleum Adhesive

UZIN LE 43

**Thread-drawing adhesive to bond linoleum with a high adhesion**

**Wet adhesive with short open time with a rapid and extremely strong bond**

- High strength development for all linoleum floor coverings

### APPLICATIONS:

- Linoleum floor covering in sheets and tiles up to 4 mm
- For Korkment subfloors as well as bonding linoleum on bonded korkment subfloors
- Normal wear in residential, commercial and office areas

### PROPERTIES:

- Easy to spread
- Reliability due to thread-drawing
- Excellent grab performance
- Short open time
- Fast and reliable adhesion
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
74906	14 kg drum	33	350 – 400 g/m <sup>2</sup> / B1	creme-white



## Linoleum Adhesive

UZIN LE 42

**Thread-drawing, dispersion adhesive for linoleum in sheets**

- Wet adhesive with short drying time
- High strength development for all linoleum floor coverings

### APPLICATIONS:

- For linoleum floor coverings in sheets and tiles up to 4 mm
- For korkment underlays and for the fitting of linoleum to glued korkment underlays
- In residential and commercial areas, e. g. sales rooms

### PROPERTIES:

- Low drying time
- Reliability due to thread-drawing
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
56471	17 kg drum	33	400 – 480 g/m <sup>2</sup> / B1	cream



## UZIN KE 603

## 2-Component Dispersion / Cement Adhesive



### Bond floor coverings on special constructions

Self-drying adhesive for linoleum and carpets on non-absorbent subfloors

- On existing, even dense subfloors, rapid-setting and time-saving

#### APPLICATIONS:

- For linoleum and needlepunch flooring
- On non-absorbent surfaces, e.g. UZIN RR 185
- In sports-halls, industrial and project locations

#### PROPERTIES:

- Hydraulic setting
- Interior use
- Solvent-free
- Low chromate content according to Regulation (EC) No 1907/2006 (REACH)

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
6447	A+B 10 kg drum	33	350 – 450 g/m <sup>2</sup> / B1 450 – 550 g/m <sup>2</sup> / B2	light grey

## UZIN RK 36

## Linofix



### Quick repair of blisters, hollow spots at roll ends or jutting edges

Set for linoleum repair

- Special adhesive for repair work on linoleum floor coverings, cork linoleum and korkment on absorbent and non-absorbent subfloors.

#### APPLICATIONS:

- For linoleum floor coverings, cork linoleum and korkment
- High loads in residential, commercial and industrial areas, e.g. residential construction, hospitals, sports centers, etc.

#### PROPERTIES:

- Short open time
- Quick tack with strings
- Extremely fast strength development
- Also for difficult to access areas
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
69984	0,5 kg plastic bottle	1	400	depending on use	creme

# UZIN WK 222

## Solvent-Free Contact Adhesive

Can be used  
like solvent  
based contact  
adhesives

### Bonding stairs, walls and profiles

**Water based neoprene adhesives for all types of constructional contact bonding**

- Permits economic contact bonding even with unwieldy floor coverings, solvent-free and without restrictions by work safety measures
- Takes the demands on a healthy indoor climate into account

#### APPLICATIONS:

- Soft skirting boards, stair profiles, hollow skirting and others
- All textile floor coverings, including needle felt and woven carpet, on stair in block format or with protruding edge
- PVC/cushioned vinyl floor coverings, linoleum, India rubber flooring and insulating underlays for stairs and riser
- Textile impact absorbing wall coverings or composite floor coverings on walls and ceilings
- Repair bonding work, seam restorations, revision covers and others
- On all subfloors customary in construction

#### PROPERTIES:

- Superb rolling and brushing properties
- Small application amounts
- Can be applied also one day in advance
- Long contact bonding time
- Interior use
- Solvent free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
61989	12 kg rectangular bucket	–	50	300 – 450 g / m <sup>2</sup> total quantity dual-sided, UZIN foam roller coarse 25 cm / 20 mm	beige
61981	6 kg rectangular bucket	–	80		
61970	1 kg drum	12	24 boxes / 288 units		

### UZIN WK 222 in practice



1. The wide field of application includes covered skirtings, PVC skirtings and staircases



2. Especially in using UZIN WK 222 for staircases clarifies the extreme adhesion.



3. Even a safe application of fibred comfort acoustic carpets in winding areas can be warranted.



4. UZIN WK 222 is versatile useable. Application of carpet skirtings, seam repair or difficult repair work e.g.

## UZIN Silicone Brush

## Application Brush for UZIN WK 222



### APPLICATIONS:

- Application tool for UZIN WK 222 in both the skirting area and at the edges and corners of floor coverings

### PROPERTIES:

- Dried adhesive can be removed from the bristles without problem; the brush can be reused

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
65151	1 x 6 pcs	6	–	–	white / aubergine-coloured

## UZIN Rollers

## Rollers and Handle for UZIN WK 222



### Rollers and handle for application of UZIN primers, adhesives and tackifiers

- Clean distribution of UZIN WK 222 over the surface = lowest consumption
- Low application quantity = fast drying = saves waiting time

### APPLICATIONS:

- 1./2. UZIN Foam roller course for contact adhesive UZIN WK 222
3. UZIN Roller handle made of metal with a plastic handle; fits to roller No. 1

### PROPERTIES:

- Suitable for the mentioned UZIN product
- Strong construction
- Easy to handle
- Long life
- Roller is longer durable by wrapping airtight in foil

Article No.		Width	Shipping Unit	Consumption	Colour
61983	1. UZIN Foam roller course 25 cm / 20 mm	25 cm	5	–	yellow
61984	2. UZIN Foam roller course 10 cm / 10 mm	10 cm	10	–	yellow
9195	3. UZIN Roller handle 25 cm	for 25 cm	10	–	green

## UZIN DK 290 Thermocoll

## Single-Stick and Contact Adhesive



### Cove-formed installation of PVC and polyolefin floor coverings

#### Heat-activated contact adhesive

- No solvent based adhesive allowed in hospitals, gives specification advantages
- Can be re-activated repeatedly – correction is easy

### DESCRIPTION:

- For PVC and polyolefin flooring
- On absorbent and non-absorbent surfaces
- In commercial and industrial locations

### BENEFITS:

- Heat-activated
- Long contact bond time
- Permanently tacky
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
13023	5 kg drum	72	approx. 350 g/m <sup>2</sup> / B 1	creme-white



## High Grab Tackifier

UZIN Multilift

### Easy-release installation of fleece backings

Fixative for textile coverings with fleece backings

- As an alternative to loose-lay, is easy to release, saves renovation costs

#### APPLICATIONS:

- For sheet textile coverings with fleece backings
- On absorbent and non-absorbent surfaces
- On suitable, intact, existing floor coverings, e.g. PVC flooring
- In normal wear domestic locations

#### PROPERTIES:

- Easy roller application
- Easy to release on dense surfaces
- Permanent high-tack
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
11172	10 kg canister	60	50 – 150 g/m <sup>2</sup> / roller application	white

## UZIN Universal Tackifier NEW

NEW

### Easy-release installation of soft textile coverings

Water-soluble dispersion fixative for PVC and textile coverings

- Easier to release than fully bonded, saves costs during later renovation

#### APPLICATIONS:

- For textile coverings with lightweight secondary- or fleece-backings
- For soft PVC and cushioned vinyl
- On absorbent and non-absorbent surfaces
- On suitable, intact, existing floor coverings, e.g. PVC flooring
- In rented accommodation, domestic and light-weight project locations

#### PROPERTIES:

- Application by roller or notched trowel
- Limited possible to release on dense surfaces
- As a wet-bond or pressure-sensitive adhesive
- Interior use
- Solvent-free



OKOLINE



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
6473	12 kg drum	30	100 – 200 g/m <sup>2</sup> / roller 150 – 200 g/m <sup>2</sup> / A4	cream-white
6474	3 kg drum	90	250 – 300 g/m <sup>2</sup> / A3 approx. 300 g/m <sup>2</sup> / A2	cream-white

## Anti-Slip

UZIN U 1000

### Non-slip installation of loose-laid tiles

Slip-resistant and tackifying dispersion for loose-laid carpet tiles

- Prevents „wandering“ of tiles but allows easy removal at any time

#### APPLICATIONS:

- For loose-laid carpet tiles with bitumen-, PVC- or PU- backings
- On absorbent and non-absorbent surfaces
- On access and raised flooring, existing floor finishes
- In domestic and commercial locations

#### PROPERTIES:

- Easy roller application
- Very economical consumption
- Antistatic
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
6748	10 kg canister	60	50 – 100 g/m <sup>2</sup> / roller application	white





### Easy release installation of laid sheet and tile coverings

Very low emission, slip-resistant and pressure-sensitive dispersion for loose-laid textile sheet and tile coverings

- Economical in contract work even in high-demand office locations
- Textile coverings can be removed; floor covering installations can be re-arranged

#### APPLICATIONS:

- For loose-laid, fleece-backed textile coverings released by the manufacturer
- On level, non-absorbent surfaces
- For use on access flooring, raised floors, wearing surfaces or prepared, primed screeds
- As a carpet tile tackifier in sheet or tile

#### PROPERTIES:

- Roller application
- Economical consumption
- Very strong pressure-sensitive adhesion
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
5088	10 kg canister	60	50 – 100 g/m <sup>2</sup> / roller	light blue

## ELECTRO STATIC CONTROL INSTALLATION



notched trowelblade included  
(23/80 und 23/TL)



### Bonding conductive PVC and rubber floor coverings with high dimensional stability

Conductive fibre adhesive for PVC and rubber flooring

- Hard adhesive ridge, high shear strength – optimal dimensionally stable adhesion even with thick rubber floor coverings
- Folding 28 cm/21 cm notch blade profile enclosed, optionally for large or small areas

#### APPLICATIONS:

- For conductive PVC floor coverings as tiles
- For conductive rubber floor coverings as tiles
- Conductive textile floor coverings (use tooth profile 23/TL)
- On absorbent, prepared surfaces
- In commercial and project locations

#### PROPERTIES:

- Very low consumption
- Easy application
- High shear resistance
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
12344	14 kg drum	33	250 – 280 kg/m <sup>2</sup> 23/80 notch blade	light grey

# ELECTRO STATIC CONTROL INSTALLATION



## Conductive Adhesive for PVC, Rubber, Linoleum and Textile

### UZIN KE 2000 SL

#### Wet-bond adhesive for the sensitive health sector

Conductive fibre-adhesive for sheet and tile rubber, PVC, textile and linoleum floor coverings

- Long open time to ensure a secure installation
- High coverage for project work, therefore cost-effective

#### APPLICATIONS:

- Conductive PVC covering and rubber flooring up to a thickness of 4 mm in sheets and tiles (use tooth profile 23/80)
- Conductive textile floor coverings (use tooth profile 23/TL)
- Conductive linoleum floor covering in sheets and tiles up to a thickness of 4 mm (use tooth profile 23/TL)
- Heavy use in residential, commercial and industrial areas, e.g. in hospitals, operating theatres, computer rooms, production buildings, etc.
- On absorbant and non absorbant subfloors

#### PROPERTIES:

- Pronounced conductivity stability
- Easy to brush
- Pronounced adhesive stringing
- Fast tack
- Low consumption
- High shear resistance
- Solvent-free



notched trowelblade included  
(23/80 und 23/TL)

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
14162	14 kg drum	33	250 – 300 g/m <sup>2</sup> / B 23/80 500 – 600 g/m <sup>2</sup> / B 23/TL	dark grey

ÖKOLINE



## Conductive Textile and Linoleum Adhesive

### UZIN UZ 57 L

#### Powerful thread-formation

Conductive fibre-adhesive for textile and linoleum coverings

- Rapid grab properties, efficient installation, saves time
- Snap-off 28 cm / 21 cm trowel blade supplied, option for large or small areas

#### APPLICATIONS:

- For conductive textiles, woven carpet, needlepunch
- For conductive linoleum sheet flooring
- On absorbent, prepared surfaces
- On conductive priming coat, cooper-strip
- In commercial and project locations

#### PROPERTIES:

- Fast grab
- Thread-forming
- High initial and final strength
- Conductive in accordance with DIN EN 13 415
- Interior use
- Solvent-free



notched trowelblade included  
(23/80 und 23/TL)

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
33150	14 kg drum	33	500 – 600 g/m <sup>2</sup> / B 23/TL	light grey



# ELECTRO STATIC CONTROL INSTALLATION

## UZIN KR 421 L

## Conductive 2-Component Epoxy Adhesive



### Conductive and heavy-duty installation of resilient floor coverings

Conductive, flexible epoxy-resin adhesive for heavy-duty floor coverings in interior locations

- Highest adhesion, therefore extremely reliable
- Especially for all conductive (special) installations, problem-solver

#### APPLICATIONS:

- For conductive rubber tile flooring
- For conductive PVC in sheet and tile
- For conductive linoleum in sheet and tile
- On absorbent and non-absorbent surfaces

#### PROPERTIES:

- Comparatively easy to spread
- For extremely high loadings up to 5 N/mm<sup>2</sup>
- Interior and exterior use
- Low-solvent

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
47513	A/B 6 kg tin drum	30	approx. 300 g/m <sup>2</sup> / A5 350 – 400 g/m <sup>2</sup> / A1 / A2 400 – 600 g/m <sup>2</sup> / B1 / B2	black

## UZIN PE 262 L

## Conductive Additive



Additive to give electrically conductive properties to dispersion products and cement mortars

- Reliable conductivity under loose-laid tiles and ceramics

#### APPLICATIONS:

- For conductive, loose-laid carpet tiles
- On prepared surfaces

#### PROPERTIES:

- Provides high lateral conductivity
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
54457	5 kg canister	90	–	black

## UZIN Conductive Copper-Strip

## Self-Adhesive



Self-adhesive copper-strip for conductive flooring constructions

- Self-adhesive, therefore easy to install

#### APPLICATIONS:

- For all types of conductive installations

#### PROPERTIES:

- 10 mm wide, 0.035 mm thick

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
10141	2 rolls each 20 lin.m	1	–	–	copper colour



The brief descriptions of products should only be used as a guide.  
Detailed product data sheets for all products are available which should be used as reference when using the products.



## Sigan 1 High-Performance Adhesive

Easy  
removal with  
no residue

### Fast adhesion of new coverings onto levelling compounds and chipboard

Patented, micro-perforated special foil carrier, dry adhesive on both sides, for the installation of textile and resilient floor coverings. Guarantees to leave no residues when removed later.

- For new resilient and textile floor covering
- On levelling compound, chip board, metal

#### APPLICATIONS:

- Installation of textile and resilient floor coverings
- Suitable for any size area
- Sigan is resistant to cleaning agents and spray extraction cleaning
- Sigan is suitable for underfloor heating
- Permits usage under high loads and traffic such as chair castors and lift trucks

#### PROPERTIES:

- Quick and easy installation
- No trapped air bubbles thanks to micro-perforation and ventilation channels
- Floor covering immediately ready for foot traffic and loads
- Can be bonded / used immediately
- Can later be removed, guaranteed without residues
- Interior use
- Solvent-free




ÖKOLINE



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Dimensions
37127	1 roll Sigan 1 and 1 roll Sigan 1 tape	1	40	total content covers 20 m <sup>2</sup>	75 cm x 25 m 50 mm x 25 m

### ① Sigan 1 in practice



1. Apply special Primer Planus on the subfloor



2. Bond Sigan 1 on the prepared subfloor



3. Peel the protective paper from the Sigan 1 keeping it flat and straight



4. Lay in new flooring and press down avoiding stress or distortion

## Sigan Elements Plus High-Performance Adhesive

Easy  
removal with  
no residue

**Fast adhesion of new luxury vinyl tiles and PVC tiles onto levelling compounds, chipboard and metal**

Dimensionally stabilising, dry adhesive system on both sides, for installing LVT and PVC tiles onto levelling compounds, chipboard and metal. Guarantees to leave no residues when removed later.

- For luxury vinyl tiles and PVC tiles
- On levelling compounds, chipboard, metal

### APPLICATIONS:

- Installation of luxury vinyl tiles and PVC tiles
- Suitable for any size area
- Sigan is resistant to cleaning agents and spray extraction cleaning
- Sigan is suitable for underfloor heating
- Permits usage under high loads and traffic such as chair castors

### PROPERTIES:

- Dimensionally stabilising
- Quick and easy installation
- Floor covering immediately ready for foot traffic and loading
- Immediately weldable
- PVC luxury floor covering and PVC tiles can be installed without joints
- Can later be removed, guaranteed without residues
- Solvent-free / complies with TRGS 610 (technical regulation for dangerous substances)
- Does not dry out or become brittle
- Interior use
- Solvent-free



Article No.	Packsizes	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Dimensions
71280	1 roll Sigan Elements Plus and 1 roll Sigan Elements Plus tape	1	40	total content covers 20 m <sup>2</sup>	75 cm x 25 m 50 mm x 25 m

### ① Sigan Elements Plus in practice



1. Apply special Primer Planus on the subfloor



2. Install Sigan Elements Plus in the running direction of the new floor covering.



3. Measure the room, divide into planks or tiles. Mark the starting point of the first row with a soft pencil or regular DVD marker on the protective paper. Place a steel rail along the measuring points. Pull the protective paper away from the Sigan Elements Plus horizontally and straight up to the steel rail. As an alternative way use Sigan Elements Universal Tape.



4. Install the planks or tiles along the reference line without stressing and press down firmly by hand.

# ADHESIVES FOR FLOOR COVERINGS AND ACCESSORIES

## Planus

## Special Primer for Sigan 1 or Sigan Elements Plus



### System component for Sigan 1 or Sigan Elements Plus

- Guarantees reliable adhesion of floor coverings with Sigan 1, Sigan Elements Plus or Sigan Elements Universal Tape
- On levelling compounds, chipboard, metal

#### APPLICATIONS:

- On absorbent surfaces such as levelling compounds, chipboard, wood-fibreboards (OSB, MDF, etc.), magnesia screeds, wooden floors (untreated)
- On non-absorbent surfaces such as metal (untreated)

#### PROPERTIES:

- Suitable for underfloor heating system
- Can be re-coated without sanding down
- Can be coated with dispersion adhesives or levelling compounds\* without sanding down
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption
37681	2,5 kg canister	126	70 – 100 g/m²
37130	10 kg canister	40	70 – 100 g/m²



ÖKOLINE

## Cork Rubbing Board textile-covered



### Practical cork board for rubbing down Sigan and floor coverings

#### APPLICATIONS:

- For easy rubbing down

#### PROPERTIES:

- Strong construction textile covered with wooden hand-grip (professional quality)

Article No.	Packsize	Weight
72642	1 piece	0,5 kg



## Sigan 2 High-Performance Adhesive

Easy  
removal with  
no residue

### Fast adhesion of new coverings onto existing resilient floor coverings

Patented, metal-reinforced special dry adhesive system with ventilation channels for the installation of textile and resilient floor coverings which guarantees to leave no residues when removed later. Suitable for any size area.

- For new resilient and textile floor covering
- Existing resilient and ceramic surfaces

#### APPLICATIONS:

- Installation of textile and resilient floor coverings
- Suitable for any size area
- Sigan is resistant to cleaning agents and spray extraction cleaning
- Sigan is suitable for underfloor heating
- Permits usage under high loads and traffic such as chair castors and lift trucks

#### PROPERTIES:

- Quick and easy installation
- No trapped air bubbles thanks to the ventilation channels
- Floor covering immediately ready for foot traffic and loads
- Can be bonded / used immediately
- Can later be removed, guaranteed without residues
- Interior use
- Solvent-free



ÖKOLINE



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Dimensions
37128	1 roll Sigan 2 and 1 roll Sigan 2 tape	1	40	total content covers 20 m <sup>2</sup>	75 cm x 25 m 5 cm x 25 m

### ① Sigan 2 in practice



1. Bond Sigan 2 in the appropriate direction onto existing PVC, cushioned vinyl or linoleum



2. Lay in new PVC, cushioned vinyl or carpet and press down avoiding stress or distortion



3. The floor covering is immediately ready to take traffic and loading



4. And years later remove the covering together with Sigan 2 leaving no residue



## Sigan Elements High-Performance Adhesive

Easy  
removal with  
no residue

**Fast adhesion of new luxury vinyl tiles and PVC tiles onto existing resilient floor coverings**

Dimensionally stabilising, dry adhesive system on both sides, for installing LVT and PVC tiles onto existing smooth floor coverings. Guarantees to leave no residues when removed later.

- For luxury vinyl tiles and PVC tiles
- On existing smooth floor coverings

### APPLICATIONS:

- Installation of luxury vinyl tiles and PVC tiles
- Suitable for any size area
- Sigan is resistant to cleaning agents and spray extraction cleaning
- Sigan is suitable for underfloor heating
- Permits usage under high loads and traffic such as chair castors

### PROPERTIES:

- Dimensionally stabilising
- Quick and easy installation
- Floor covering immediately ready for foot traffic and loading
- Immediately weldable
- PVC luxury floor covering and PVC tiles can be installed without joints
- Can later be removed, guaranteed without residues
- Solvent-free / complies with TRGS 610 (technical regulation for dangerous substances)
- Does not dry out or become brittle
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Dimensions
71279	1 roll Sigan Elements and 1 roll Sigan Elements tape	1	40	total content covers 20 m <sup>2</sup>	75 cm x 25 m 50 mm x 25 m

### ① Sigan Elements in practice



1. Install Sigan Elements in the running direction of the new floor covering onto the existing floor covering.



2. Measure the room, divide into planks or tiles. Mark the starting point of the first row with a soft pencil or regular DVD marker on the protective paper. Place a steel rail along the measuring points. Pull the protective paper away from the Sigan Elements horizontally and straight up to the steel rail. As an alternative way use Sigan Elements Universal Tape.



3. Install the planks or tiles along the reference line without stressing and press down firmly by hand.



4. Floor covering is immediately ready for foot traffic.



## High-Performance Adhesive

Sigan 3

### Fast adhesion of new coverings onto existing wood flooring / laminate

Patented, micro-perforated special foil carrier, dry adhesive on both sides, for the installation of textile floor coverings. Guarantees to leave no residues when removed later.

- For new textile floor coverings
- On existing wood flooring, laminate

#### APPLICATIONS:

- Installation of textile floor coverings
- Suitable for any size area
- Sigan is resistant to cleaning agents and spray extraction cleaning
- Sigan is suitable for underfloor heating
- Permits usage under high loads and traffic such as chair castors and lift trucks

#### PROPERTIES:

- Quick and easy installation
- No trapped air bubbles thanks to micro-perforation and ventilation channels
- Floor covering immediately ready for foot traffic and loads
- Can be bonded / used immediately
- Can later be removed, guaranteed without residues
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Dimensions
37129	1 roll Sigan 3 and 1 roll Sigan 3 tape	1	40	total content covers 20 m <sup>2</sup>	75 cm x 25 m 5 cm x 25 cm



## High-Performance Adhesive

Sigaway

### Fast adhesion of new carpet onto textile surfaces

- For textile coverings
- On textile coverings

#### APPLICATIONS:

- Application of new carpets onto textile surfaces
- suitable for any size area
- Sigaway is resistant to cleaning agents and spray extraction cleaning
- Sigaway is suitable for underfloor heating

#### PROPERTIES:

- Quick and easy use
- Will not dry out or become brittle
- Floor covering immediately ready for foot traffic and loads
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Dimensions
35063	1 roll	1	40	total content covers 25 m <sup>2</sup>	100 cm x 25 m



## High-Performance Adhesive

SUPERTape 7900

### Adhesive tape for floor coverings

- For strengthening edge and seam adhesion of Sigaway installations

#### APPLICATIONS

- For strengthening edge and seam adhesion of Sigaway installation

#### PROPERTIES

- Quick and clean use
- Will not dry out or become brittle
- Floor covering immediately ready for foot traffic and loads
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions
37203	1 roll	12	42 boxes / 504 units	5 cm x 25 m



# ADHESIVES FOR SKIRTINGS AND COVING

## Sigan Elements Universal Tape



**Dimensionally stabilising, dry adhesive system on both sides, for installing LV T and PVC tiles onto levelling compounds, chipboards, existing smooth floor coverings. Guarantees to leave no residues when removed later.**

- For luxury vinyl tiles and PVC tiles
- On levelling compound, chipboard metal or existing smooth floor coverings

### APPLICATIONS:

- Installation of luxury vinyl tiles and PVC tiles
- Suitable for any size area
- Resistant to cleaning agents and spray extraction cleaning
- Suitable for underfloor heating
- Permits usage under high loads and traffic such as chair castors

### PROPERTIES:

- Dimensionally stabilising
- Quick and easy installation
- Floor covering immediately ready for foot traffic and loading
- Can later be removed, guaranteed without residues
- Interior use
- Solvent free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions
76732	1 roll Sigan Elements Universal Tape	1	720	70 mm x 25 m

## ① Sigan Elements Universal Tape in practice



1. Positioning of the wall frieze with Sigan Universal Tape. The created line can be used as a reference line. Sigan Elements or Sigan Elements Plus has to be placed at the Sigan Elements Universal Tape.



2. Positioning of the diagonally laying direction. The created line can be used as a reference line. Sigan Elements or Sigan Elements Plus has to be placed at the Sigan Elements Universal Tape.



3. Floor laying.



4. Rub down of the laid LVT tiles.



## Special Skirting Tape for DÖLLKEN

**Toptac 35**

### DÖLLKEN – UZIN system guarantee

- For DÖLLKEN core skirting boards
- On subfloors up to 1 mm structure height

#### APPLICATIONS:

- Special adhesive system for the bonding of DÖLLKEN core skirting boards. Ensures the quick and solvent-free installation

#### PROPERTIES:

- DÖLLKEN-UZIN System Guarantee
- Does not become brittle, providing a strong & permanent bond
- Rapid even on concrete & metal
- Easier with Toptac applicator
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
37204	4 rolls	1	105 units / 420 rolls	35 mm x 50 m	40 – 100 mm

## ❗ Toptac 35 in practice



1. Lift the roll retainer and arrest it. Place the adhesive rejecting siliconpaper.



2. Depending on the direction of work, insert the Toptac 35 into the applicator running to the left or the right.



3. Run the Toptac Applicator against the wall. For high skirtings (for example DÖLLKEN TS 100) place a second roll of tape above the first.




4. Remove the protective paper. Place the skirting onto Toptac 35 and tap along the skirting using a rubber hammer.



# ADHESIVES FOR SKIRTINGS AND COVING

## Contact

## High-Performance Adhesive Tape for Textile Skirtings

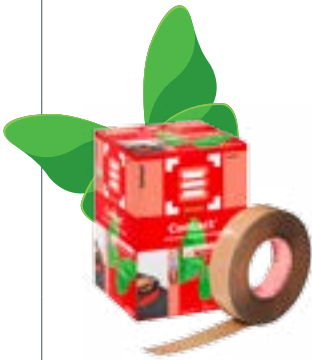

ÖKOLINE



### Strong adhesion of whipped carpet

- For whipped carpet skirtings
- On surfaces with up to 1.5 mm deep texture

#### APPLICATIONS:

- Quick and secure installation of whipped carpet skirting. Allows quick and clean working without solvents.

#### PROPERTIES:

- Does not become brittle, providing a strong & permanent bond
- Clean & fast
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
37144	3 rolls	1	96 units / 288 rolls	85 mm x 50 m	90 – 110 mm
37143	3 rolls	1	96 units / 288 rolls	70 mm x 50 m	75 – 85 mm
37142	4 rolls	1	96 units / 384 rolls	55 mm x 50 m	60 – 70 mm
37141	6 rolls	1	96 units / 576 rolls	40 mm x 50 m	45 – 55 mm

## ① Contact in der Praxis



1. Fit the Contact tape on the back of the whipped carpet skirting.



2. Remove all the protection paper from the contact tape. Fit the carpet skirting onto the wall without twisting.



3. Always place a second stripe of 20 cm Contact tape at the corners. Ensure the carpet and contact tape is creased before removing the protective paper.



4. Bump the skirting completeness by using a rubber hammer.

## Pomur 46

## Special tape for DÖLLKEN soft covered skirting WL 50 life



ÖKOLINE



### DÖLLKEN – UZIN system guarantee

- For DÖLLKEN soft covered skirting WL 50 life
- Onto surfaces with up to 1 mm deep texture

#### APPLICATIONS:

- Bonding of DÖLLKEN soft skirting on subfloors with 1 mm structure depth
- Quick and solvent-free installation

#### PROPERTIES:

- DÖLLKEN-UZIN System Guarantee
- 3 - 5 times faster
- No prior fitting and priming
- Does not become brittle, providing a strong & permanent bond
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
47437	4 rolls	1	60 units / 240 rolls	40 mm x 50 m	45 – 55 mm

# ADHESIVES FOR SKIRTINGS AND COVING



## High-Performance Tape for Coarse-Backed Textile Skirtings

**Bullran 45**

### Strong adhesion of carpet skirtings onto rough surfaces

High-performance adhesive for needlepunch, woven- and fleece-backings

- For whipped carpet skirtings 50 – 60 mm
- On surfaces with up to 3 mm deep texture

#### APPLICATIONS:

- High-performance adhesive for the installation of textile skirtings with different kind of backings

#### PROPERTIES:

- High-performance adhesive for needle punch, web and fleece backing
- Does not become brittle, providing a strong & permanent bond
- Clean & fast
- Interior use
- Solvent-free



ÖKOLINE



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
37145	4 rolls	1	144 units / 576 rolls	45 mm x 25 m	50 – 60 mm

## Special Tape for Flooring-Strips in DÖLLKEN Coving

**Contact 40**

### Strong adhesion of carpet skirtings onto rough surfaces

High-performance adhesive for needlepunch, woven- and fleece-backings

- For whipped carpet skirtings 50 – 60 mm
- On surfaces with up to 3 mm deep texture

#### APPLICATIONS:

- High-performance adhesive for the installation of textile skirtings with different kind of backings

#### PROPERTIES:

- High-performance adhesive for needle punch, web and fleece backing
- Does not become brittle, providing a strong & permanent bond
- Clean & fast
- Interior use
- Solvent-free



ÖKOLINE



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
37141	6 rolls	1	96 units / 576 rolls	40 mm x 50 m	45 – 55 mm

# TOOLS FOR THE APPLICATION OF SKIRTINGS

## Toptac Applicator



### Suitable for fast and precise application of Toptac

- Quick application of Toptac

#### APPLICATIONS:

- Special development for Toptac skirting tape

#### PROPERTIES:

- Strong, precision equipment

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Weight
37146	1 piece	1	–	1,8 kg

## Contact / Bullran Applicator



### Suitable for fast and precise application of Contact / Bullran onto carpet skirtings

- During application, the Contact and Bullran are pressed into the structure of the carpet backing and consistent adhesion is produced

#### APPLICATIONS:

- Onto carpet backings

#### PROPERTIES:

- Equipment made from cast aluminium with powder coating

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Weight
37147	1 piece	1	–	8,0 kg

## Rubber Hammer



### Practical rubber hammer for fitting of skirtings

- By tapping, the adhesive tape and the fitted skirting develop the required bond-strength
- Leaves no black marks on the skirting

#### APPLICATIONS:

- On carpet skirtings

#### PROPERTIES:

- Strong construction (professional quality)
- White head

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Weight
47450	1 piece	1	–	0,4 kg



# TOOLS AND ADHESIVES FOR SKIRTINGS AND COVING



## Special Tape System for PVC Skirting

Remur 45, 55, 95

- For PVC and cushioned vinyl skirting installation
- On smooth subfloors

### APPLICATIONS:

- Metal-reinforced special system for the dimensionally stable installation of rigid and flexible PVC and cushioned vinyl skirting on smooth subfloors.
- Quick and clean working without solvents

### PROPERTIES:

- Dimensionally stable
- Avoids use of contact adhesive
- No prior fitting and priming
- 3 – 5 times faster
- Will not dry out or become brittle
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
69995	4 rolls	1	60 units / 240 rolls	45 mm x 50 m	50 – 60 mm
69996	4 rolls	1	60 units / 240 rolls	55 mm x 50 m	60 – 70 mm
69997	2 rolls	1	60 units / 120 rolls	95 mm x 50 m	100 – 110 mm

## To rub down Remur

WOLFF Stair iron with roll

Usefull tool to apply Remur properly onto the wall or onto the floor

### APPLICATIONS:

- For the proper instalation of Remur or skirtings

### PROPERTIES:

- Strong, precision equipment



Article No.	Packsize	Weight
65853	1 piece	0.7 kg

## Special tape for rubber skirting

Goman 50

- For rubber skirting boards
- On subfloors up to 1 mm structure

### APPLICATIONS:

- Installation of rubber baseboards, rubber stair angle, molded rubber base (for the bottom part), form-base corner units in projects like hospitals and retirement homes

### PROPERTIES:

- Avoids use of solvent based contact adhesives
- Clean indoor air
- 3 – 5 times faster
- No prior fitting and priming
- Interior use
- Solvent-free



ÖKOLINE



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions	Base height
37201	4 rolls	1	60 units / 240 rolls	50 mm x 50 m	55 – 60 mm



# ADHESIVES FOR SKIRTINGS AND COVING

## Goman 90

## Special tape for rubber coving



- For pre-formed skirting systems
- On subfloors up to 1 mm structure

### APPLICATIONS:

- Installation of rubber coved skirtings and rubber skirtings in projects like hospitals and retirement homes

### PROPERTIES:

- Avoids use of solvent based contact adhesives
- Clean indoor air
- 3 – 5 times faster
- No prior fitting and priming
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions
37202	2 rolls	1	60 units / 120 units	90 mm x 50 m

# ADHESIVES FOR STAIR COVERINGS

## Steptec

## Special adhesive system for the staircase area



### Secure gluing of floor coverings to steps

- For textile, linoleum, PVC and cushioned vinyl coverings
- On subfloors with up to 1 mm structure height

### APPLICATIONS:

- Dry adhesive system for the installation of textile and elastic floor coverings on stair cases

### PROPERTIES:

- Staircase remains accessible at all times
- 3 – 5 times faster
- No need for contact adhesive
- Clean indoor air
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions
59818	1 roll	1	140	220 mm x 25 m
59814	1 roll	1	210	150 mm x 25 m

## Goman 240

## Special Tape for rubber stair systems



- For rubber staircase systems
- On subfloors up to 1 mm structure

### APPLICATIONS:

- Installation of rubber stair cases with pre-finished angles in projects like hospitals and retirement homes

### PROPERTIES:

- Staircases remain accessible at all times
- Avoids use of solvent based contact adhesives
- 3 – 5 times faster
- Clean indoor air
- No prior fitting and priming
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Dimensions
37200	1 roll	4	30 boxes / 120 units	240 mm x 50 m

# Wood Flooring Installation



The brief descriptions of products should only be used as a guide.  
Detailed product data sheets for all products are available which should be used as reference when using the products.

# 1-COMPONENT REACTION RESIN PRIMER

## UZIN PE 414 Turbo 1-Component PUR Rapid Primer

Quick  
drying

### Fast and reliable priming

One-component reaction resin primer for wood flooring and floor covering work

- no mixing, fast, high coverage and reliable

### APPLICATIONS:

- for priming under reaction resin wood flooring adhesives
- on cement- or calcium sulphate-screeds, concrete, etc.
- on existing surfaces, e.g. well-bonded adhesive residues
- as a barrier against moisture on moisture-resistant surfaces
- for smoothing compounds when grit-binding with UZIN Quartz Sand 0.8

### PROPERTIES:

- rapid drying
- thin consistency
- good penetration
- neutral odour
- interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
41364	12 kg canister	60	80 – 150 g/m² per layer	brown
41365	6 kg canister	60		

### ① UZIN PE 414 Turbo in practice



Applied with the UZIN nylon fibre roller you will achieve a fully covered and uniform layer.

Adhesive / Subfloor	Curing times
Before direct bonding with UZIN MK 200, UZIN MK 150, UZIN MK 92 S, UZIN MK 95, UZIN MK 92 PLUS	> 2 hours
Before direct bonding with UZIN MK 250 and UZIN MK 200 PLUS	> 12 hours
On poured asphalt screeds in general	> 12 hours

### What is special about UZIN PE 414 Turbo?

UZIN PE 414 Turbo is easy to apply, has one component, acts as a barrier and provides security not only before laying wood flooring. Even before levelling work, the 1-component PUR rapid primer provides a firm support, for example as a barrier primer for other floor coverings.

# 2-COMPONENT REACTION RESIN PRIMER



## 2-component water-based EP system primer

UZIN PE 420

### Prime, universal, fast and reliable before wood flooring installation

#### Universal reaction resin primer before direct bonding of wood flooring

- To prime prior direct adhesion of wood flooring with UZIN reaction resin adhesives well as UZIN MK 85 Turbo

#### DRYING TIMES:

- Curing time / foot traffic: 2 – 4 hours

#### APPLICATIONS:

- To prime under reaction resin wood flooring adhesives well as UZIN MK 85 Turbo
- On new mastic asphalt and prepared ceramic tiles
- On new cement-screeds or concrete
- On new calcium sulphate screeds, gypsum-based dry screed materials
- On new, screw-fixed chipboards P4 -P7 and OSB 2 - OSB 4 boards
- On warm water underfloor heating systems

#### PROPERTIES:

- Easy to apply
- Rapid drying
- Consolidates the top surface of screeds
- Increases the shear resistance
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
76938	9 kg A + B canister	–	–	100 – 150 g/m <sup>2</sup>	green



## UZIN MK 250

### 1-Component Premium STP Wood Flooring Adhesive

#### Environmentally and technically safe adhering of wood flooring

**Hard, shear-resistant adhesive with long working time for all common types of wood flooring**

- Strength of common 2-component wood flooring adhesive with the ease of handling of a 1-component product
- Harmonises with all wood flooring lacquers, oil/waxes
- Does not contain any emollient ingredients
- Tubes, especially for applications with UZIN ATD 100

#### MAIN AREA OF APPLICATION:

- Solid and multi-ply wooden flooring
- Wood block flooring

#### EXTENDED AREA OF APPLICATION:

- Mosaic wood flooring (8 mm solid wood flooring)
- Edge-laid strips (10 – 22 mm)
- Multi-ply wood flooring
- Exotic woods (obtain technical advice)

#### PROPERTIES:

- Excellent ridge formation
- Very high suction adhesion
- Fresh adhesive bonds to cured adhesive
- Harmonises with all wood flooring lacquers, oil /waxes and does not contain any emollient ingredients Adhesive residues on wood flooring can be removed
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
66799	16 kg KU-drum	–	33	1000 – 1200 g/m <sup>2</sup>	red-brown / oak
79888	2 x 7,5 kg tubes	2	30 boxes / 60 pieces		

#### ① UZIN MK 250 in practice



UZIN MK 250 supports in the difficult installation of solid and multi-ply wooden flooring with a long open time and high filling capacity. Hard, shear-resistant adhesive ridges limited wood deformations and produces a visually sophisticated appearance.

# 1-COMPONENT STP-ADHESIVES



## 1-Component STP Wood Flooring Adhesive

UZIN MK 200

### Bonding hard wood floors universal and technically perfect

Hard elastic adhesive for wood flooring with tongue and groove

- High filling strength and rapid setting support reliable bonding and permit the bonded surfaces to be sanded and finished already after 24 hours.

#### MAIN AREA OF APPLICATION:

- Multi-ply wood flooring

#### EXTENDED AREA OF APPLICATION:

- Wood block flooring
- Solid wood flooring 15 – 22 mm
- Multi-ply wooden flooring

#### PROPERTIES:

- Good ridge formation
- High suction adhesion
- Hard elastic adhesive in accordance with ISO 17 178
- Adhesive residues on wood flooring can be removed
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
60806	16 kg drum	–	33	1000 – 1200 g/m <sup>2</sup> / B11 for solid boards obtain technical advice	beige
61584	2 x 8 kg tubes	2	30 boxes / 60 units		

## 1-Component STP Wood Flooring Adhesive

UZIN MK 200 PLUS

### Performing time-consuming wood flooring installation work technically perfect

Hard elastic adhesive for wood flooring with tongue and groove joints with long working time

- Long working time facilitates the installation of time-consuming installation patterns or room sections
- High filling strength and suction adhesion in combination with long working time support reliable installation of large-format wood flooring elements

#### MAIN AREA OF APPLICATION:

- Multi-ply wood flooring

#### EXTENDED AREA OF APPLICATION:

- Wood block flooring 15 – 22 mm
- Solid wood flooring 15 – 22 mm
- Multi-ply wooden flooring

#### PROPERTIES:

- Excellent ridge formationRapid grab
- Good suction adhesion
- Hard elastic adhesive in accordance with ISO 17 178
- Adhesive residues on wood flooring can be removed
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
75420	16 kg drum	–	33	1000 – 1200 g/m <sup>2</sup> / B11 for solid boards obtain technical advice	beige

## 1-Component Multi-ply Wood Flooring Adhesive

UZIN MK 150

### Time-saving and economic installation of multi-ply wood flooring

Hard elastic adhesive for multi-ply wood flooring

- Good ridge formation and sets quickly

#### MAIN AREA OF APPLICATION:

- Multi-ply wood flooring up to 2200 – 200 mm

#### PROPERTIES:

- Hard elastic adhesive in accordance with ISO 17 178
- Adhesive residues on wood flooring can be removed
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
71715	16 kg drum	33	1000 – 1200 g/m <sup>2</sup>	light-beige

# 1-COMPONENT PUR-ADHESIVE

## UZIN MK 95

## 1-Component PUR Wood Flooring Adhesive



### Hard-elastic reliable adhesion of wood flooring

Hard elastic, slightly foaming adhesive for large-format wood flooring with tongue and groove

- Ideal for the installation of large-format wood flooring types
- wood flooring can be sanded after 24 hours

#### MAIN AREA OF APPLICATION:

- Solid wood flooring 15 – 22 mm
- Wood block flooring 15 – 22 mm

#### EXTENDED AREA OF APPLICATION:

- Multi-ply wood flooring
- Multi-ply wooden flooring

#### PROPERTIES:

- Excellent ridge formation
- Foaming
- Hard elastic adhesive in accordance with ISO 17 178
- Adhesive residues on wood flooring can be removed while fresh
- Interior use
- Solvent-free

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
39552	16 kg drum	33	1000 – 1200 g/m <sup>2</sup> / B11	beige

## UZIN ATD 100

## Wood Flooring Adhesive Dispenser



### Ergonomic application of wood flooring adhesive

#### APPLICATIONS:

- UZIN MK 250 T (2 x 7,5 kg tubes)
- UZIN MK 200 (2 x 8 kg tubes)

#### „EVERYTHING-IN-THE-CASE PACKAGE“:

1 x UZIN ATD 100, 4 x ATD nozzle, 1 x Transport box,  
1 x Charger, 2 x Battery packs, 1 x Silicon spray,  
1 x Aluminium adhesive tape, 3 x Notched trowels

#### PROPERTIES:

- Increases installation capacity/hour
- No adhesive soiling while standing
- Easy handling
- No interfering cables or compressed air hoses
- Low cleaning effort thanks to practical exchangeable nozzle

Article No.	Item	Packsize	Shipping Unit / Pallet
69199	Adhesive dispenser	1 piece / wooden box	–
68063	ATD nozzle / 190 mm	4 pieces / box	–
79868	ATD nozzle / 400 mm	4 pieces / box	–
79866	ATD nozzleholder / 190 mm	1 piece	–
79867	ATD nozzleholder / 400 mm	1 piece	–
79869	ATD stand	1 piece / box	–

# 2-COMPONENT PUR-ADHESIVES



## 2-Component PUR Wood Flooring Adhesive

UZIN MK 92 S

### Fast adhesion of wood flooring with no swelling

Hard, shear-resistant and quick-setting universal adhesive for all types of wood flooring

- For all types of wood flooring and laminates, universal applications

#### MAIN AREA OF APPLICATION:

- Mosaik wood flooring (8 mm solid wood flooring)
- Edge-laid strips
- Wood block flooring
- Solid wooden flooring
- 10 mm solid wood flooring
- End grain RE / WE

#### PROPERTIES:

- Universal use
- Excellent ridge formation
- Rapid setting
- Hard adhesive in accordance with ISO 17 178
- Harmonises with all wood flooring lacquers, oil / waxes and does not contain any emollient ingredients
- interior use
- solvent-free

#### EXTENDED AREA OF APPLICATION:

- Multiply wood flooring
- Multiply wooden flooring



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
59640	A/B 10 kg combi-can	39	1000 – 1200 g/m² / B11	beige
59512	A/B 6 kg combi-can	52		
59532	A/B 2,5 kg combi-can	108		

## 2-Component PUR Wood Flooring Adhesive

UZIN MK 92 PLUS

### Performing time-consuming wood flooring installations universally and securely

Hard, shear-resistant universal adhesive with long pot and working time for all types of wood flooring

- Advantageous with time-consuming wood flooring installations through long pot and working time

#### MAIN AREA OF APPLICATION:

- Mosaic wood flooring (8 mm solid wood flooring)
- Edge-laid strips
- Wood block flooring
- Solid wood flooring
- 10 mm solid wood flooring
- End grain RE / WE

#### PROPERTIES:

- Universal use
- Great ridge formation
- Very long pot and working time
- Hard adhesive in accordance with ISO 17 178
- Harmonises with all wood flooring lacquers, oil / waxes and does not contain any emollient ingredients
- Interior use
- Solvent-free

#### EXTENDED AREA OF APPLICATION:

- Multi-ply wood flooring / wooden flooring



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
76605	A/B 12 kg combi-can	39	1000 – 1200 g/m² / B11	red-brown / oak

## 2-Component PUR Wood Flooring Adhesive

UZIN MK 92 S dark

### Adhesion of dark types of wood universally and quickly

Hard, shear-resistant and quick-setting universal adhesive for dark types of wood

- Gives visual advantages by matching adhesive joints / wood

#### MAIN AREA OF APPLICATION:

- Exotic woods, dark woods
- Mosaik wood flooring (8 mm solid wood flooring)
- Edge-laid strips
- Wood block flooring,
- Solid wooden flooring
- 10 mm solid wood flooring
- End grain RE / WE

#### PROPERTIES:

- Universal use
- Excellent ridge formation
- Rapid setting
- Hard adhesive in accordance with ISO 17 178
- Harmonises with all wood flooring lacquers, oil / waxes and does not contain any emollient ingredients
- interior use
- solvent-free

#### EXTENDED AREA OF APPLICATION:

- Multi-ply wood flooring / wooden flooring



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
59504	A/B 8,54 kg combi-can	39	1000 – 1200 g/m² / B11	dark brown



# DISPERSION PRIMER

## UZIN PE 385

## Dispersion system primer for wood flooring



### Ready to use for rapid priming

**Quick-drying dispersion primer for absorbent subfloors prior to installation of wood flooring**

- Primer for standard wood flooring installation
- Installation with fast and easy apply

#### DRYING TIME:

- Cement based surfaces: approx. 1 hour

#### APPLICATIONS:

- On new cementitious screeds
- As primer under UZIN low-slump and self-levelling compounds which are suitable for wood flooring

#### PROPERTIES:

- Rapid drying
- Increases the working time of UZIN dispersion wood flooring adhesives
- Interior use
- Solvent-free



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
76910	10 kg CUBE it simple	72	100 – 150 g/m <sup>2</sup>	white, creme

# DISPERSION ADHESIVES

## UZIN MK 85 Turbo

## Rapid Dispersion Wood Flooring Adhesive of the latest Generation



### Securely bonding low-swelling wood flooring

**Hard elastic and low water content wood flooring adhesive for moisture-insensitive wood flooring**

- Working on level, non absorbent primers (e. g. UZIN PE 460) in residential and commercial areas, solvent-free keeping with current trends

#### MAIN AREA OF APPLICATION:

- Mosaic wood flooring (8 mm solid wood flooring)
- Edge-laid strips

#### PROPERTIES:

- Excellent ridge formation
- Hard adhesive in accordance with ISO 17178
- Low water content
- Interior use
- Solvent-free

#### EXTENDED AREA OF APPLICATION:

- 2-ply prefinished wood flooring (70 x 500 mm)



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
76754	18 kg drum	–	33	800 – 1200 g/m <sup>2</sup>	red-brown / oak
79731	310 ml cartridge	12	–		

## UZIN MK 80

## Dispersion Wood Flooring Adhesive



### Reliable adhesion of low-shrinkage wood flooring

**Hard, shear-resistant wood flooring adhesive for moisture-insensitive wood flooring**

- on level, absorbent subfloors in domestic and project work – Time-saving and economic installation of wood flooring

#### MAIN AREA OF APPLICATION:

- Mosaik wood flooring (8 mm solid wood flooring)
- Edge-laid strips (16-22 mm)

#### PROPERTIES:

- Good ridge formation
- Hard adhesive in accordance with ISO 17 178
- Low water content
- Interior use
- Solvent-free

#### EXTENDED AREA OF APPLICATION:

- 2-ply prefinished wood flooring (70 x 500 mm)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
79730	16 kg drum	33	800 – 1200 g/m <sup>2</sup> / B11	beige



## Cold glue

UZIN RK 33

### Dispersion Cold Glue (D3) for tongue-and-groove glueing

- dries fast and transparent

#### MAIN AREA OF APPLICATION:

- Prefinished wood flooring
- chipboard

#### EXTENDED AREA OF APPLICATION:

- Engineered wood floors

#### PROPERTIES:

- universal applications
- good water resistance
- High final strength
- interior use
- solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
6989	810 gr bottle	12	36 boxes / 432 units	–	white

## 1-Component PUR Injection Adhesive

UZIN RK 37

### Repairs hollow-spots in wood flooring

Hard, shear-resistant and quick-setting universal adhesive for repair work

- eliminates hollow-spots in installed wood flooring, avoids possible claims

#### MAIN AREA OF APPLICATION:

- to eliminate loose and hollow sections
- to bond individual pieces of wood flooring
- spot-bonding of floating floor materials

#### PROPERTIES:

- one-component and ready to use
- good penetration and wetting properties
- fills hollow sections
- interior use
- solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
13663	250 gr bottle	2	–	–	yellowish / transparent

# LEVELLING COMPOUND FOR WOOD FLOORING

## Wood Flooring Levelling Compound

UZIN NC 174

### Preparation for wood flooring

Self-levelling, high-strength, cement floor levelling compound for wood flooring and laminate installations – thickness from 1.5 – 20 mm

- low stress and good absorbency, reliable system product for wood flooring work

#### APPLICATIONS:

- for smoothing and levelling of surfaces prior to wood flooring installation
- on cement- and calcium sulphate- screeds
- on concrete

#### PROPERTIES:

- excellent flow due to the Level Plus Effect
- For thicknesses from 1.5 - 20 mm
- smooth surface
- good absorbency
- high tensile and shear strength
- interior use
- low chromate content according to Regulation (EC) No 1907/2006 (REACH)



Article No.	Packsize	Shipping Unit / Pallet	Consumption	Thickness	Colour
1264	25 kg bag	42	2.4 kg/m <sup>2</sup> 3.2 kg/m <sup>2</sup> 16.0 kg/m <sup>2</sup>	1.5 mm 2.0 mm 10.0 mm	grey



# INSULATION AND INSTALLATION UNDERLAYS

NEW

## UZIN Multimoll Vlies NEW

## Stress-Relieving Underlay



### Bond wood flooring onto problem subfloors

**Bonded, stress-relieving fleece underlay for bonded wood flooring and laminates**

- bonds yet separates wood flooring on / from problem subfloors, the problem-solver in renovation work
- allows wood flooring to be bonded on otherwise unsuitable new screeds, built-in reliability

#### APPLICATIONS:

- for solid and multi-ply wood flooring and laminates
- on chipboard, dry screed materials, mastic asphalt
- on existing surfaces with well-bonded residues of adhesives and levelling compounds
- on warm water underfloor heating systems

#### PROPERTIES:

- easy to cut and install
- relieves tensile and shear stresses
- bonds yet separates at the same time
- adds reliability to renovated subfloors
- interior use

Article No.	Length   Width	Shipping Unit / Roll	Shipping Unit / Pallet	Thickness	Colour
79722	50 x 1 m	50 m <sup>2</sup>	12 rolls / 600 m <sup>2</sup>	ca. 1 mm	green white

## UZIN Multimoll SoftSonic 3 mm

## Insulating and Stress-Relieving Underlay



### Acoustic insulation and stress-relieving action for wood flooring installations

**Acoustically insulating, stress-relieving underlay with minimal thickness for bonded wood flooring**

- minimal construction thickness, ideal for refurbishment work
- stress-relieving plus insulation of impact and ambient sound = 3-in-1 function
- increases underfoot and ambient comfort

#### APPLICATIONS:

- for bonded wood flooring
- on screeds with risk of cracking
- on existing tile or natural stone floor finishes
- on warm water underfloor heating systems
- in domestic and commercial locations

#### PROPERTIES:

- easy to cut with a trimming-knife
- high acoustic insulation improvement of 14 dB
- bridges hair-line cracks
- interior use

Article No.	Length   Width	Shipping Unit / Box	Shipping Unit / Pallet	Thickness	Colour
41391	75 x 50 mm	16 boards / 6 m <sup>2</sup>	30 boxes / 180 m <sup>2</sup>	3 mm	white marbled

NEW

## UZIN Multimoll Top 4 NEW, Top 7, Top 12

## Stress-Relieving Boards



### Renovating boards for problematic subfloors

**Stress-distributing underlay for bonded wood flooring and laminates**

- minimal thickness, ideal for renovation, separating and stress-relieving

#### APPLICATIONS:

- for all types of wood flooring
- for textile and resilient flooring, levelling recommended
- on mixed surfaces and subfloors susceptible to cracking

#### PROPERTIES:

- stress-relieving
- separates, reduces the shear forces from the wood flooring
- increases underfoot and ambient comfort
- interior use

Article No.	Article	Shipping Unit / Box	Shipping Unit / Pallet	Packsize / Thickness	Colour
79720	Top 4 NEW	9 m <sup>2</sup> = 15 panels	10 boxes / 90 m <sup>2</sup>	100 x 60 cm / 4 mm	white mottled
79721	Top 4 NEW	—	250 panels / 150 m <sup>2</sup>	100 x 60 cm / 4 mm	
79724	Top 7	5,4 m <sup>2</sup> = 9 panels	10 boxes / 54 m <sup>2</sup>	100 x 60 cm / 7 mm	
79726	Top 7	—	120 panels / 72 m <sup>2</sup>	100 x 60 cm / 7 mm	
79727	Top 12	3 m <sup>2</sup> = 5 panels	10 boxes / 30 m <sup>2</sup>	100 x 60 cm / 12 mm	



The brief descriptions of products should only be used as a guide.

Detailed product data sheets for all products are available which should be used as reference when using the products.



## Screed Anchors



**Corrugated, stainless steel clamps for strong stitch-bonding of screed cracks and joints**

- ideal for stitch-bonding screed bays

### APPLICATIONS:

- for resin-bonding of joints and cracks
- for joining separate screed sections

### PROPERTIES:

- will not rust, 6 x 70 mm
- corrugated for ideal fixing

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
13878	100 pieces	100	–	approx. 3 – 5 per lin. m.	stainless steel

## UZIN Foam Expansion Strip B



**Self-adhesive PE expansion strip with base; 5 mm thick and 50 mm high**

- The self-adhesive base and the integrated fleece backing which presses the strip to the wall in a „spring-like“ manner ensure clean execution without any annoying adhesive residues on the wall

### APPLICATIONS:

- For the mechanical separation between floor and wall prior to application of levelling compounds or thin screeds

### PROPERTIES:

- Positively prevents acoustic bridges
- Perfect for thin screeds and smoothing compounds
- High adhesive strength
- Height 50 mm, thickness 5 mm

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
60378	1 roll / 20 lin.m	5	–	–	light blue

## UZIN Foam Expansion Strip



**Self-adhesive PE expansion strip; 5 mm thick and 50 mm high**

- self-adhesive bond even on slightly dusty surfaces, quick installation saves time

### APPLICATIONS:

- for the mechanical separation between floor and wall prior to application of levelling compounds or thin screeds

### PROPERTIES:

- high adhesive power
- height 50 mm, thickness 5 mm

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
10122	1 roll / 25 lin.m	10	–	–	white

## NEW UZIN Levelpin



**Self-adhesive height-measurement markers for levelling compounds and screeds**

- Self-adhering even on slightly dusty subfloors

### APPLICATIONS:

- For the exact measuring of higher layers of levelling compounds and screeds up to 100 mm, respectively 4"

### PROPERTIES:

- High adhesive strength
- Max. measuring height 100 mm, respectively 4"

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
61834	20 pieces	5 x 20 pieces	–	–	neon-green



## Glass Fibre

## UZIN Reinforcement Fibre

**Alkaline resistant glass fibre for increasing the structural strength of self-levelling smoothing compounds**

- increases reliability on technically suspect subfloors

### APPLICATIONS:

- for unsound subfloors in renovation work
- reduces cracking of the levelling compound when used on unsound subfloors

### PROPERTIES:

- easy to incorporate
- interior use



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
91725	0.25 kg bag	5	–	1 bag = 250 g per 25 kg of levelling compound	white

## Glass Fibre Webbing

## UZIN Reinforcement Webbing

**Webbing for strengthening and load distribution when applying levelling compounds on weak subfloors**

- reinforcing, load-distributing layer, a problem-solver

### APPLICATIONS:

- for stabilising the levelling compound top-coat
- on subfloors with deflection and inadequate compressive strength

### PROPERTIES:

- acts as a load-distributing layer
- interior use



Article No.	Length   Width	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
9181	50 x 1 m	50 m <sup>2</sup>	30 rolls	–	white

## Cleaning Cloths

## UZIN Clean-Box

**Highly effective cleaning cloths for removing adhesive residues from surfaces, hands and tools**

### APPLICATIONS:

- removes both fresh and dried 1-component PUR and STP adhesive residues
- removes fresh to slightly dried 2-component PUR and epoxy resin adhesive residues

### PROPERTIES:

- dries quickly with no residue
- multipurpose applications
- especially kind to skin
- economical in use



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Shelf Life	Colour
38465	1 drum each 72 cloths	6	–	min. 24 months	green

## Self-Adhesive

## UZIN Conductive Copper-Strip

**Self-adhesive copper-strip for conductive flooring constructions**

- self-adhesive, therefore easy to install

### APPLICATIONS:

- for all types of conductive installations

### PROPERTIES:


- 10 mm wide, 0.035 mm thick



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
10141	2 rolls each 20 lin.m	1	–	–	copper colour



## UZIN Quartz Sand 2.5



### Coarse Sand

**Fire-dried quartz sand with grain-size 1.0 – 2.5 mm as an aggregate for levelling compounds**

- reduces stress in levelling compounds and mortars, therefore greater reliability

**APPLICATIONS:**


- as an aggregate for UZIN levelling compounds when used in thicker coats

**PROPERTIES:**

- interior and exterior use

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
9947	25 kg bag	–	40	–	light grey

## UZIN ES



### Special Fillers – Fine

**Fire-dried quartz flour mix for producing reaction resin levelling compounds**

- pre-mixed

**APPLICATIONS:**

- for producing reaction resin levelling compounds with reaction resin binder UZIN ER 200

**PROPERTIES:**

- interior and exterior use

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
10915	15 kg bag	–	67	see product data sheet for UZIN ER 200	light grey

## UZIN XS



### Special Fillers – Coarse

**Fire-dried quartz sand mix grade 0.1 – 3.2 mm for producing reaction resin screeds and mortars**

- pre-mixed

**APPLICATIONS:**


- for producing reaction resin screeds and mortars with reaction resin binder UZIN ER 200

**PROPERTIES:**

- interior and exterior use

Article No.	Packsize	Shipping Unit / Pallet	Consumption	Colour
13793	25 kg bag	40	see product data sheet for UZIN ER 200	light grey

## UZIN Quartz Sand 0.8



### Fine Sand

**Fire-dried quartz sand with grain-size 0.3 – 0.8 mm for filling and grit-blinding**

- grit-blinding of epoxy products gives a secure, well-keyed bond-surface for subsequent coats

**APPLICATIONS:**

- for all reaction resin products such as UZIN PE 460, UZIN PE 480, UZIN PE 414 Turbo, UZIN KR 416 or UZIN KR 516

**PROPERTIES:**

- interior and exterior use

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
10606	25 kg bag	–	40	–	light grey



## Colour Concentrate

## UZIN Epoxy Colourant

Red, liquid colour concentrate for 2-component epoxy resins

- good contrast between first and second coats giving greater reliability

### APPLICATIONS:

- for epoxy resin products such as UZIN PE 460, UZIN PE 480

### PROPERTIES:

- high colour intensity
- interior and exterior use



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
55504	0.5 l bottle	35	20 boxes	approx. 100 ml / 10 kg resin	red

## UZIN Epoxy Accelerator

Accelerator for 2-component epoxy resins

- a full damp-proofing system can be applied in one day, rapid hardening in 3 – 4 hours

### APPLICATIONS:

- for epoxy resin products UZIN PE 460 and UZIN PE 480

### PROPERTIES:

- Accelerates the setting process
- interior and exterior use



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
33155	200 g bottle	4	120 boxes	0.2 kg / 5 kg resin 2 x 0.2 kg / 10 kg resin	brownish / transparent

## UZIN PUR Accelerator

Accelerator for 2-component PUR products

- Accelerator for faster application and hardening of 2-component PUR products. For interior and exterior use.

### APPLICATIONS:

- accelerating the reaction of 2-component PUR adhesives UZIN KR 430, UZIN MK 92 S, UZIN MK 92 PLUS and UZIN Sport Adhesive
- acceleration of PUR levelling compound UZIN KR 410
- acceleration of PUR mortars produced in combination with special coarse fillers UZIN XS and UZIN KR 410

### PROPERTIES:

- Easy dosing
- Liquid consistency
- Minimises waiting times
- No effect on the adhesive properties
- No effect on the flow properties of UZIN KR 410



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
56041	20 ml bottle	10 x 20 ml	100 boxes	up to 0.25% to the selected PUR adhesive or PUR levelling compound	brownish / transparent

## UZIN MS Structural Adhesive

All-round 1-component MS Adhesive

- Low-slump highly structural adhesive with quick strength development

### APPLICATIONS:

- for bonding tasks on floor, wall and ceiling
- for wood, skirting boards, metal and many others

### PROPERTIES:

- fast curing
- powerful, solid, multifunctional
- solvent-free



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
39737	310 ml cartridge	12 x 310 ml	–	acc. to application	grey



## UZIN Fondur MK



## Construction Adhesive

**Paste consistency repair adhesive for floors, walls and ceilings**

- construction adhesive from a „cartridge“, economical problem-solver for interior use

**APPLICATIONS:**

- for skirtings, profiles
- for bonding many different materials, e.g. PVC, wood etc.

**PROPERTIES:**

- viscous paste consistency
- interior use
- solvent-free

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
6437	310 ml cartridge	20 x 310 ml	60 boxes	acc. to application	beige-white

## UZIN VE 124



## EP Thinner

**Alcohol-based epoxy thinner and protective cleaner**

- alcohol-based, therefore environmentally compatible

**APPLICATIONS:**


- as a thinner for all UZIN 2-component epoxy materials
- as a cleaner for fresh epoxy, PUR, synthetic resin and dispersion adhesive residues

**PROPERTIES:**

- protective cleaner
- removes all greasy or oily contamination
- high solvent content

Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Consumption	Colour
7005	5 litre canister	–	84	–	colourless

## UZIN Primer Rollers



## Nylon Fibre Roller | Foam Roller | Foam Roller course | Roller Handle

**Rollers and handle for application of all types of UZIN primers, adhesives and tackifiers**

- clean distribution of material over the surface = lowest consumption and ideal application quantity

**APPLICATIONS:**

- UZIN Nylon fibre roller for epoxy-resin or super-fast primers, e.g. UZIN PE 460, UZIN PE 414 Turbo and PE 280
- UZIN Foam roller for dispersion primers, e.g. UZIN PE 360, UZIN PE 260 NEW or UZIN U 3000 Primer
- UZIN Nylon fibre roller for UZIN U 3000 RollFix
- UZIN Foam roller course for the contact adhesive UZIN WK 222
- Roller handle made from metal with plastic handle to fit the above rollers

**PROPERTIES:**

- suitable for the mentioned UZIN products
- strong construction
- easy to handle
- long life
- Roller is longer durable by using the convenient WOLFF roller box (Item-No. 13814)

Article No.	Width	Shipping unit / Box	Shipping Unit / Pallet	Colour	
9394	1. UZIN nylon fibre roller 25 cm / 14 mm*	25 cm	10	–	white
9194	2. UZIN foam roller 25 cm / 20 mm	25 cm	10	–	white
60788	3. UZIN nylon fibre roller 25 cm / 6 mm	25 cm	5	–	white, striped
61983	4. UZIN foam roller course 25 cm / 20 mm	25 cm	5	–	yellow
61984	5. UZIN foam roller course 10 cm / 10 mm	10 cm	10	–	yellow
9195	6. UZIN roller handle 25 cm	for 25 cm	10	–	green

\* „25 cm / 14 mm“ describes the width, here e. g. for 25 cm as well as the pile height, here e. g. 14 mm





## Applications Brush for UZIN WK 222

## UZIN Silicone Brush

### APPLICATIONS:

- Application tool for UZIN WK 222 in both the skirting area and at the edges and corners of floor coverings

### PROPERTIES:

- Dried adhesive can be removed from the bristles without problem; the brush can be reused



Article No.	Packsize	Shipping Unit / Box	Shipping Unit / Pallet	Colour
65151	1 x 6 pcs	6	–	white / aubergine-coloured

## UZIN Water Bucket

Transparent plastic bucket with printed litre-scale for measuring the correct water quantity for UZIN powder products

- easy measurement of water quantity = the same consistency and quality

### APPLICATIONS:

- for measurement of the correct water quantity when mixing powder products

### PROPERTIES:

- strong construction
- transparent
- litre-scale



Article No.	Packsize	Shipping Unit / Pallet	Colour
10412	1 bucket with 9 litre capacity	275	transparent

## UZIN Mixing Bucket

Strong plastic bucket with handle-grips for mixing all types of UZIN powder products

- correct size and strength = easy handling

### APPLICATIONS:

- for mixing of UZIN levelling compounds
- for PUR and epoxy smoothing compounds or mortar

### PROPERTIES:

- strong construction
- ideal for 25 kg powder products



Article No.	Packsize	Shipping Unit / Pallet	Colour
9191	1 bucket with 30 litre capacity	66	blue

## UZIN Ripper **NEW**

Dustreducing opening aid for levelling compounds

### APPLICATIONS:

- For dustreducing emptying of levelling compound paperbags

### PROPERTIES:

- strong construction
- use in connection with UZIN Mixing Bucket



Article No.	Item	Packsize	Shipping Unit / Pallet	Colour
79564	UZIN Ripper	1	–	blue

## UZIN Levelling Compound Mixer



Mixer for blending UZIN levelling compounds

### APPLICATIONS:

- for drill-chucks with min. diameter 13 mm
- Basket diameter 120 mm

### PROPERTIES:

- fast and homogeneous mixing of UZIN levelling compounds

Article No.	Item	Packsize	Shipping Unit / Pallet	Colour
13606	Levelling Compound Mixer	1	–	silver

## Screed Rake



Special stainless-steel tool for application of UZIN levelling compounds

- improves the surface results of levelling and smoothing work

### APPLICATIONS:

- for easy application of UZIN levelling compounds
- for 3 mm thickness using the attached R2 notched blade 55 cm wide

### PROPERTIES:

- with handle-holder and screw-attached blade-clamp

Article No.	Item	Packsize	Shipping Unit / Pallet
52298	Screed Rake	1	–

## Large Surface Rake



Special tool from stainless steel for the application of UZIN levelling compounds with thick layers

- Uniform thickness with smoothing work through adjustable bases

### APPLICATIONS:

- For thicknesses from 6 – 22 mm infinitely variable, with 80 cm width
- Ideal when pumping levelling compound for thick layers

### PROPERTIES:

- Sturdy design, partially from stainless steel

Article No.	Item	Packsize	Shipping Unit / Pallet
13658	Large Surface Rake	1	–

## Spike Roller



For removing air and improving flow in freshly applied levelling compounds

- improves the flow of self-levelling compounds, increases customer satisfaction

### APPLICATIONS:

- use the correct roller according to application thickness
- for the best surface finish results
- essential when pump-applying levelling compounds

### PROPERTIES:

- strong metal / plastic construction
- easy to clean

Article No.		Packsize	Shipping Unit / Pallet
13879	Spike roller 25 cm / 11 mm	1	–
14272	Spike roller 25 cm / 21 mm	1	–
13637	Spike roller 25 cm / 31 mm	1	–
13762	Spike roller 50 cm / 11 mm	1	–
14021	Spike roller 50 cm / 21 mm	1	–
13636	Spike roller 50 cm / 31 mm	1	–



## Adhesive Trowel

Ergo-Star

Ergonomically shaped adhesive trowel for the application of UZIN adhesives

- correct shape and size = the easiest and non-tiring application work

### APPLICATIONS:

- for the effortless application of UZIN adhesives

### PROPERTIES:

- ergonomic and strong construction



Article No.	Width	Shipping Unit / Box	Shipping Unit / Pallet
41784	21 cm	10	–
41787	28 cm	10	–

## Adhesive trowel

## UZIN Wood flooring notched trowel

Notched trowel for the application of UZIN wood flooring adhesive

- Simple, economic and rugged, practical handling

### APPLICATIONS:

- For UZIN wood flooring adhesives

### PROPERTIES:

- Non-rusting sheet metal, punched notches



Article No.	Width	Packsize	Shipping Unit / Pallet
51255	20 cm B3	1	–
51254	20 cm B11	1	–

## Adhesive trowel

## UZIN Solid board notched trowel NEW

Special UZIN notched trowel with B11 basic toothing and two increased notches in the centre

- Supports bonding of solid wood flooring through two higher adhesive ridges, prevents cavities

### APPLICATIONS:

- For solid wood flooring and large-format wood flooring types

### PROPERTIES:


- Non-rusting sheet metal, rugged



Article No.	Item	Width	Packsize	Shipping Unit / Pallet
65656	Notch Trowel	21 cm	1	–
79889	Trowel Blade	21 cm	10	–
79890	Trowel Blade	28 cm	10	–

## Trimming-Knife Blades

Article No.	Item	Packsize
13419	Straight blade 0.65 mm	100
13421	Hooked blade 0.65 mm	100
13422	Super-Hooked Blade	100
32760	Half moon blade	100



## Trowel Blades



Article No.	Item	Packsizes	Article No.	Item	Packsizes
13367	Notch A1, 21 cm	10	13370	Notch B1, 21 cm	10
13382	Notch A1, 28 cm	10	13385	Notch B1, 28 cm	10
13373	Notch A2, 21 cm	10	13371	Notch B2, 21 cm	10
13388	Notch A2, 28 cm	10	13386	Notch B2, 28 cm	10
13374	Notch A3, 21 cm	10	13372	Notch B3, 21 cm	10
13389	Notch A3, 28 cm	10	13387	Notch B3, 28 cm	10
13375	Notch A4, 21 cm	10	13380	Notch B11, 21 cm	10
13390	Notch A4, 28 cm	10	13399	Notch B11, 28 cm	10
13376	Notch A5, 21 cm	10	13397	Notch R1, 56 cm	10
13391	Notch A5, 28 cm	10	13396	Notch R2, 56 cm	10

## Cork Rubbing Board textile-covered



**Practical cork board for rubbing down Sigan and floor coverings**

### APPLICATIONS:

- For easy rubbing down

### PROPERTIES:

- Strong construction textile covered with wooden hand-grip (professional quality)

Article No.	Packsizes	Shipping Unit / Pallet	Weight
72642	1 piece	–	0,5 kg

## Rubber Hammer



**Practical rubber hammer for fitting of skirtings**

- By tapping, the adhesive tape and the fitted skirting develop the required bond-strength
- Leaves no black marks on the skirting

### APPLICATIONS:

- To install skirtings

### PROPERTIES:

- Strong construction (professional quality)
- White head

Article No.	Packsizes	Shipping Unit / Box	Shipping Unit / Pallet	Weight
47450	1 piece	1	–	0,4 kg

## Design Collection



**The complete set for installing design floors**

### INCLUDES:

- Original WOLFF Linocut seam cutter
- FasTrimmer for chamfering the floor backing
- Duo pressure roller
- Mitrebox shears for design floor
- Comes with practical Tanos carrying case
- For an easy and safe transportation

Every single product can be found in the WOLFF product guide.

Article No.	Item
74843	Design Collection

# TOOLS | ACCESSORIES



## Power X 1100

### 1080 Watt 1-speed gear mixer with speed control and speed lock

- For mixing viscous mortar (e.g. screed, tile adhesive)
- Solid-shaft electronics: Soft-start, temperature control, overload protection
- Variable speed control through throttle switch

#### INCLUDES:

Power X 1100, Stirrer type KR 120 S/M14



Article No.	Item
66938	Gear mixer Power X 1100

## Hygrometer Universal V1-D4

### Designed for moisture measurement of subfloors

- Non-invasive moisture test method with high measuring accuracy
- Real-time display of measurements on easy to read display
- Suitable for preliminary checks to determine the dryness of materials
- For CM and RH measurements
- RF-Measurement possible by additional air sensor



Article No.	Item
71053	Hygrometer Universal V1-D4

## Stirring station, 75 litre, complete

### Complete stirring station to mix up to 75 kg of powder products

- 2-stop tip system for perfect balance
- Perfectly matched tools
- Suitable for all types of stirring machine thanks to special mounting

#### INCLUDES:

Base frame, mixing bucket 75 l, mounting, stirrer for stirring station, hose holder



Article No.	Item
65480	Stirring station 75 litre, complete
65481	Base frame for stirring station 75 l
65491	Mounting for stirring station 75 l
65492	Stirrer for stirring station 75 l
65493	Mixing bucket for stirring station 75 l
65494	Hose holder for stirring station 75 l

## Transportation caddy, 30 litre, including mixing bucket

### To mix up to 30 kg of powder products

- 2-stop tip system for perfect balance
- Suitable for all common 30 l buckets

#### INCLUDES:

Transportation caddy base frame, 30 l mixing bucket



Article No.	Item
65846	Transportation caddy, 30 litre, including mixing bucket
65848	Transportation caddy base frame
65847	30 l mixing bucket

SUBFLOORS | SCREED

SUBFLOOR PREPARATION

FLOOR COVERING ADHESIVES

switchTec®

WOOD FLOORING INSTALLATION

TOOLS | ACCESSORIES

SERVICE







# SUBFLOOR PREPARATION



	PRIMERS							
SUBFLOORS	UZIN PE 360 PLUS	UZIN PE 280	UZIN PE 260 NEW	UZIN PE 480	UZIN PE 460	UZIN PE 400	UZIN PE 414 Turbo	UZIN PE 630
SYSTEM COMPONENTS IN HIGH-SPEED CONSTRUCTION	✓	✓	-	-	-	✓	✓	✓
CEMENT SCREEDS	✓	-	-	-	-	✓	✓	-
GYPSUM BASED SCREED	✓	-	-	-	-	-	-	-
CONCRETE	✓	-	-	✓	✓	-	-	-
CONCRETE, CEMENT SCREEDS WITH HIGH/RISING RESIDUAL MOISTURE	-	-	-	✓	✓	✓	✓	-
MASTIC ASPHALT, GRITTED	-	-	-	-	-	-	-	-
MASTIC ASPHALT NOT ADEQUATELY GRITTED	-	✓	✓	-	-	-	-	✓
GYPSUM-BASED DRY SCREED MATERIALS	✓	-	✓	-	-	-	-	-
MAGNESIA- AND STONE-WOOD- SCREEDS	-	-	✓	-	✓	-	✓	✓
CHIPBOARD AND OSB BOARDS A) SCREW-FIXED	-	-	✓	-	-	-	✓	✓
CHIPBOARD AND OSB BOARDS B) FLOATING	-	-	✓	-	-	-	✓	✓
WOODEN PLANKS	-	-	✓	-	-	-	-	✓
CERAMIC TILING, TERRAZZO AND STONE FLOORING	-	✓	-	-	✓	-	-	✓
SUBFLOORS WITH OVERALL WELL-BONDED, WATERPROOF RESIDUES OF ADHESIVES	-	✓	✓	-	✓	-	✓	✓
SUBFLOORS WITH OVERALL WELL-BONDED, WATER-SOLUBLE RESIDUES OF ADHESIVES	-	-	-	-	✓	-	✓	-
WELL-BONDED COATINGS AND PAINTS	-	✓	-	-	✓	-	-	-

MAIN APPLICATION: ✓ SUBFLOOR PREPARATION 1) MAX. 3 MM THICKNESS, 2) WITHOUT PRIMER, 3) PLEASE CONSULT UZIN TECHNICAL

The recommendations on this page describe the main applications.

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.



## LEVELLING COMPOUNDS

REPAIR SMOOTHING COMPOUNDS			SELF-LEVELLING COMPOUNDS									
UZIN NC 182	UZIN NC 118	UZIN NC 880	UZIN NC 170 LevelStar	UZIN NC 160	UZIN NC 150	UZIN NC 172 BiTurbo	UZIN NC 175	UZIN NC 195	UZIN NC 110	UZIN NC 115	UZIN NC 117	UZIN KR 410
✓	-	✓	-	-	-	✓	-	-	-	-	-	-
✓	-	✓ <sup>2)</sup>	✓	✓	✓	✓	-	✓	-	-	✓	-
✓	✓	✓	✓	✓	✓	✓	-	✓	✓	-	✓	-
✓	-	✓ <sup>2)</sup>	✓	✓	-	✓	-	✓	-	-	✓	-
✓	-	✓ <sup>2)</sup>	✓	✓	✓	✓	-	✓	-	-	-	-
✓ <sup>2)</sup>	✓ <sup>2)</sup>	✓ <sup>2)</sup>	✓ <sup>1) 2)</sup>	✓ <sup>1) 2)</sup>	-	✓ <sup>1)</sup>	-	-	✓ <sup>2)</sup>	-	✓	-
✓	✓	✓ <sup>2)</sup>	-	-	-	-	-	-	✓	-	✓	✓ <sup>2)</sup>
✓	✓	✓	✓	-	-	✓	✓	-	✓	✓	✓	-
✓	-	✓	✓	-	-	✓	-	-	✓	-	✓	-
✓	✓	✓ <sup>2)</sup>	✓	-	-	-	✓	-	✓	✓	✓	-
-	-	✓ <sup>2)</sup>	-	-	-	-	-	-	✓	✓	-	✓
-	-	-	-	-	-	-	✓	-	-	✓	-	-
✓	-	✓ <sup>2)</sup>	✓	✓	✓	✓	-	-	-	-	✓	✓
✓	✓	✓ <sup>2)</sup>	✓	✓	✓	✓	-	-	✓	-	✓	-
✓	✓	-	✓	✓	✓	-	-	-	✓	-	-	-
✓	-	✓ <sup>2)</sup>	✓	-	-	✓	-	-	-	-	-	✓ <sup>2)</sup>

# INSULATING, INSTALLATION AND STRESS-RELIEVING UNDERLAYS



		INSULATING, INSTALLATION AND STRESS-RELIEVING UNDERLAYS				
		UZIN Multimoll Vlies NEW	UZIN Multimoll Softsonic 3 mm	UZIN Multimoll Top 4 NEW	UZIN Multimoll Top 7	UZIN Multimoll Top 12
POSSIBLE COVERINGS	PVC / CUSHIONED VINYL	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
	LUXURY VINYL TILES (LVT)	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
	POLYOLEFIN	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
	LINOLEUM	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
	RUBBER	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
	WOOD FLOORING A) WITH TONGUE-AND-GROOVE	✓	✓	✓	✓	✓
	WOOD FLOORING B) WITHOUT TONGUE-AND-GROOVE	✓	✓	✓	✓	✓
	TEXTILE COVERINGS	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
	NEEDLEPUNCH	–	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
SUBFLOOR	ON EXISTING SUBFLOORS	✓	✓	✓ ✓	✓ ✓	✓ ✓
	ON EXISTING WEAR-SURFACES	–	–	–	–	–
	ON WARM WATER UNDERFLOOR HEATING SYSTEMS 1)	✓	✓	✓ ✓	–	–
	ON DAMP SUBFLOORS	–	–	–	–	–
	ON SOILED OR OIL-CONTAMINATED SUBFLOORS	–	–	–	–	–
PROPERTIES	FULLY BONDED INSTALLATION	✓	✓	✓ ✓	✓ ✓	✓ ✓
	LOOSE LAID INSTALLATION	–	–	–	–	–
	SELF-ADHESIVE	–	–	–	–	–
	CASTOR WHEELS IN ACCORD. WITH DIN EN 12529	✓	✓	✓ ✓	✓ ✓	✓ ✓
	ACOUSTIC INSULATION IMPROVEMENT VALUE IN DB	–	14	–	12	13
	FLAMMABILITY CLASSIFICATION	–	B 2 <sup>2)</sup>	B 2 <sup>2)</sup>	B 2 <sup>2)</sup>	B 2 <sup>2)</sup>
	THICKNESS IN MM	1	3	4	7	12

MAIN APPLICATION: ✓ WOOD FLOORING ✓ SUBFLOOR PREPARATION

1) For further information, please refer to the Product Data Sheet or obtain technical advice

2) DIN 4102-1 / 3) DIN EN 13 501-1





## INSULATING, INSTALLATION AND STRESS-RELIEVING UNDERLAYS

UZIN RenoTop PLUS	UZIN RR 181	UZIN RR 181 FR	UZIN RR 183 Ebofloor	UZIN RR 185	UZIN RR 186 Eboflex	UZIN RR 188	UZIN RR 189 PLUS FR
✓	-	-	-	✓	✓ <sup>1)</sup>	-	✓ <sup>1)</sup>
✓	-	-	-	✓ <sup>1)</sup>	-	-	-
-	-	-	-	-	-	-	-
✓	-	-	-	✓ <sup>1)</sup>	-	-	-
✓	-	-	-	-	-	-	-
✓ <sup>1)</sup>	-	-	-	-	-	✓ <sup>1)</sup>	✓ <sup>1)</sup>
-	-	-	-	-	-	-	-
✓	✓	✓	✓	✓	✓	✓	✓
✓	-	-	✓	-	✓	✓	-
✓	-	-	✓	✓	✓	✓	-
✓	-	-	✓	✓	✓	✓	✓
-	-	-	-	-	-	✓	✓
-	-	-	-	✓	-	-	-
-	-	-	-	✓	-	-	-
-	-	-	-	-	-	✓	✓
✓	-	-	✓	✓	✓	-	-
-	✓	✓	-	-	-	-	-
✓	-	-	✓ <sup>1)</sup>	✓	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>1)</sup>
22	27	27	27	-	-	15 / 16 / 17 / 17	18 / 19
D <sub>FL</sub> -S1	B 2 <sup>2)</sup>	B <sub>FL</sub> -S1 <sup>3)</sup>	B 2 <sup>2)</sup>	-	B 2 <sup>2)</sup>	B 2 <sup>2)</sup>	B <sub>FL</sub> -S1 <sup>3)</sup>
10	6,5	6	4	1,5	1	2 / 3 / 4 / 6	3 / 4

The recommendations on this page describe the main applications.

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.

# TEXTILE FLOOR COVERINGS



	TEXTILE FLOORING ADHESIVES					TACKIFIER				BONDING STAIRS, WALLS & PROFILES
	UZIN UZ 88	UZIN UZ 57	UZIN UZ 90	UZIN KE 2428	UZIN KE 16	UZIN Multilift	UZIN Universal Tackifier	UZIN U 1000	UZIN U 2100	UZIN WK 222
CARPETS										
CARPETS WITH SECONDARY BACKING	✓	✓	✓	✓	✓	-	-	-	-	✓
CARPETS WITH LATEX FOAM BACKING	✓	✓	✓	✓	✓	-	✓	-	-	✓
CARPETS WITH LATEXED BACKING	✓	✓	✓	✓	✓	-	✓	-	-	✓
CARPETS WITH FLEECE BACKING	-	-	-	-	-	✓ <sup>1)</sup>	✓ <sup>1)</sup>	-	-	✓
CARPETS LOOSE-LAID TILES	-	-	-	-	-	-	-	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓
WOVEN GOODS	✓	✓	✓	-	-	-	-	-	-	✓
NEEDLEPUNCH	✓	✓	✓	✓ <sup>2)</sup>	✓	-	-	-	-	✓
NATURAL FIBRE COVERINGS										
NATURAL FIBRE COCO/SISAL UNCOATED BACKING	-	-	✓	-	-	-	-	-	-	-
NATURAL FIBRE COCO/SISAL COATED BACKING	✓	✓	✓	-	-	-	-	-	-	-
NATURAL FIBRE COCO/SISAL COTTON AND JUTE BACKINGS	-	-	✓	-	-	-	-	-	-	-

## MAIN APPLICATION:

### ✓ FLOORING

- 1) To install textile floor covers removable
- 2) Copper-strip to run along the centre of the row of tiles and across at the start and end of the area

The recommendations on this page describe the main applications.

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as a reference when using the products

# CONDUCTIVE SYSTEMS



CONDUCTIVE COVERINGS	CONDUCTIVE FLOOR COVERING INSTALLATION					
	UZIN UZ 57 L	UZIN KE 2000 SL	UZIN KE 66 L	UZIN KR 421 L	UZIN U 1000 + 25% PE 262 L	UZIN U 2100 + 35 % PE 262 L
CARPETS WITH SYNTHETIC SECONDARY BACKING	✓ <sup>1)</sup>	✓ <sup>1)</sup>	–	–	–	–
LOOSE-LAID CARPET TILES	–	–	–	–	✓	✓
NEEDLEPUNCH	✓ <sup>1)</sup>	–	–	–	–	–
PVC COVERINGS	–	✓ <sup>1)</sup>	✓ <sup>1)</sup>	✓ <sup>2)</sup>	–	–
LINOLEUM	✓ <sup>1)</sup>	✓ <sup>1)</sup>	–	–	–	–
RUBBER COVERINGS WITH SANDED BACKING A) SHEET	–	✓ <sup>1)</sup>	–	–	–	–
RUBBER COVERINGS WITH SANDED BACKING B) TILES	–	✓ <sup>1)</sup>	✓ <sup>2)</sup>	✓ <sup>2)</sup>	–	–

## IMPORTANT NOTE:

THIS RECOMMENDATIONS CHART SHOULD BE TAKEN AS A GUIDE ONLY. IN THE DECISION FOR THE RELEVANT CONDUCTIVE SYSTEM, THE COVERING MANUFACTURER MUST BE CONSULTED. THE COVERING RECOMMENDATIONS TAKE PRECEDENCE OVER THE UZIN RECOMMENDATION.

## MAIN APPLICATION:

### ✓ FLOORING

- 1) To install textile floor covers removable
- 2) Copper-strip to run along the centre of the row of tiles and across at the start and end of the area

The recommendations on this page describe the main applications.

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.

# RESILIENT COVERINGS AND PROFILES



	BONDING RESILIENT COVERINGS		
RESILIENT COVERINGS	UZIN KE 66 NEW	UZIN KE 2000 S	UZIN KE 16
RESILIENT COVERINGS HOMOGENEOUS / HETEROGENEOUS	✓	✓	✓
RESILIENT COVERINGS CUSHIONED VINYL	✓	✓	✓
RESILIENT COVERINGS COMPO- SITION COVERINGS WITH SYNTHETIC FLEECE BACKING	-	-	✓
LUXURY VINYL TILES (LVT)	✓	-	-
POLYURETHANE COVERINGS	-	✓	-
VINYL "FLEX" TILES	-	✓	-
LINOLEUM A) SHEET	-	-	-
LINOLEUM B) TILES	-	-	-
RUBBER COVERINGS SHEET WITH SANDED BACKING	✓	✓	-
RUBBER COVERINGS TILES WITH SANDED BACKING	✓	-	-

## MAIN APPLICATION:

### ✓ FLOORING

- 1) Linoleum sheet up to 2 mm thickness in domestic use
- 2) Linoleum sheet up to 2.5 mm, consult UZIN Technical

The recommendations on this page describe the main applications.

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.



BOND RESILIENT COVERINGS						TACKIFIER FOR DESIGN FLOOR COVERINGS (LVT)	BONDING STAIRS, WALLS AND PROFILES	
UZIN UZ 88	UZIN UZ 57	UZIN KR 430	UZIN LE 44	UZIN LE 43	UZIN KE 603	UZIN U 3000	UZIN WK 222	UZIN DK 290
-	-	-	-	-	-	-	✓	✓ <sup>1)</sup>
-	-	-	-	-	-	-	✓	-
-	✓	-	-	-	-	-	✓	-
-	-	-	-	-	-	✓	✓	-
-	-	-	-	-	-	-	✓	-
-	-	-	-	-	-	-	✓	-
✓	-	-	✓	✓	✓	-	✓	-
-	-	-	✓	✓	✓	-	✓	-
-	-	-	-	-	-	-	✓	-
-	-	✓	-	-	-	-	✓	-



# APPLICATIONS FOR SWITCHTEC® PRODUCTS

## switchTec®-ADHESIVE TECHNOLOGY FOR THE ENTIRE SURFACE

	FLOOR COVERINGS			
SUBFLOORS	PVC / CUSHIONED VINYL COVERINGS	PVC-DESIGN-COVERINGS	RUBBER COVERINGS	CARPETS
LEVELLING COMPOUND (CEMENT/ GYPSUM BASED)	SIGAN 1 + PLANUS	SIGAN ELEMENTS PLUS + PLANUS	SIGAN 1 + PLANUS	SIGAN 1 + PLANUS
CHIPBOARD / PLYWOOD / MDF- AND OSB-BOARD	SIGAN 1 + PLANUS	SIGAN ELEMENTS PLUS + PLANUS	SIGAN 1 + PLANUS	SIGAN 1 + PLANUS
EPOXY RESIN VAPOUR BARRIER	SIGAN 1 + PLANUS	SIGAN ELEMENTS PLUS + PLANUS	SIGAN 1 + PLANUS	SIGAN 1 + PLANUS
PVC / CUSHIONED VINYL COVERINGS	SIGAN 2	SIGAN ELEMENTS	SIGAN 2	SIGAN 2
LINOLEUM	SIGAN 2	SIGAN ELEMENTS	SIGAN 2	SIGAN 2
PU- AND EPOXY-RESIN COATINGS	SIGAN 2	SIGAN ELEMENTS	SIGAN 2	SIGAN 2
ARTIFICIAL STONE / TERRAZZO	SIGAN 2	SIGAN ELEMENTS	SIGAN 2	SIGAN 2
CERAMIC TILING	SIGAN 2	SIGAN 2	SIGAN 2	SIGAN 2
WOOD FLOORING	–	–	–	SIGAN 3
LAMINATE	–	–	–	SIGAN 3
CARPETS	–	–	–	SIGAWAY

## switchTec®-ADHESIVE TECHNOLOGY FOR STAIRS

	STAIRS			
SUBFLOORS	RUBBER STAIR-TREADS	RUBBER STAIR-EDGE AND ASSOCIATED COVERINGS	CUSHIONED VINYL / PVC / LINOLEUM / CARPETS	PVC-DESIGNCOVERINGS (ONLY STEP - NOT ONTO RISER)
STAIRS WITH UP TO 1 MM DEEP TEXTURE	GOMAN 240	GOMAN 240	STEPTEC 150 / 220	SIGAN ELEMENTS UNIVERSAL TAPE

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.





## switchTec®-ADHESIVE TECHNOLOGY FOR CARPET SKIRTINGS

WALL SKIRTINGS					
SUBFLOORS	CARPET SKIRTINGS 45 – 55 MM	CARPET SKIRTINGS 50 – 60 MM WITH WOVEN FLEECE OR NEEDLEPUNCH BACKING	CARPET SKIRTINGS 60 – 70 MM	CARPET SKIRTINGS 75 – 85 MM	CARPET SKIRTINGS 90 – 110 MM
WALLS WITH UP TO 1.5 MM DEEP TEXTURE	CONTACT 40	–	CONTACT 55	CONTACT 70	CONTACT 85
WALLS WITH UP TO 3 MM DEEP TEXTURE	–	BULLRAN 45	–	–	–

## switchTec®-ADHESIVE TECHNOLOGY FOR FLEXIBLE SKIRTING SYSTEMS AND PVC CURVED SKIRTING SYSTEMS

WALL SKIRTINGS/CLADDINGS				
SUBFLOORS	FLEXIBLE PVC SKIRTING (I.E. DÖLLKEN WL 50/ WL 60/WL 100)	PVC AND CUSHIONED VINYL RIGID SKIRTING	PVC- AND CUSHIONED VINYL CURVED SKIRTING SYSTEMS	FLEXIBLE PVC PROFILE WITH SMOOTH BACKING
SMOOTH SUBFLOORS	REMUR 45 / 55 / 95	REMUR 45 / 55 / 95	REMUR 95	REMUR 45 / 55 / 95

## switchTec®-ADHESIVE TECHNOLOGY FOR DÖLLKEN SKIRTING

WALL SKIRTINGS/CLADDINGS					
SUBFLOORS	FLOOR COVERING STRIPS IN DÖLLKEN CORE SKIRTING BOARDS	DÖLLKEN CORE SKIRTING BOARDS C 60, S 60/100, TS 60/100	DÖLLKEN FLEXIBLE SKIRTING BOARD WL 50 LIFE	RUBBER SKIRTING	RUBBER CURVED SKIRTING SYSTEMS
WALLS WITH UP TO 1 MM DEEP TEXTURE	–	TOPTAC 35	POMUR 46	GOMAN 50	GOMAN 50 / 90
DÖLLKEN COVERED SKIRTING C 60/TS 60/100/D60	CONTACT 40 / 55 / 85	–	–	–	–

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.

# WOOD FLOORING



	1-COMPONENT REACTION RESIN ADHESIVES					2-COMPONENT PUR REACTION RESIN ADHESIVES		
TYPES OF WOOD FLOORING	UZIN MK 250 / MK 250 T	UZIN MK 200	UZIN MK 200 PLUS	UZIN MK 150	UZIN MK 95	UZIN MK 92 S	UZIN MK 92 PLUS	UZIN MK 92 S dark
SOLID AND MULTI-LAYER BOARDS	✓	–	–	–	✓	✓	✓	✓
MULTI-LAYER WOOD FLOORING 7 X 50 CM	–	✓	✓	✓	–	–	–	–
MULTI-LAYER WOOD FLOORING ABOVE 7 X 50 CM	–	✓	✓	✓ <sup>1)</sup>	–	–	–	–
ON-EDGE WOOD FLOORING 22 MM	–	–	–	–	–	✓	✓	✓
ON-EDGE WOOD FLOORING 10, 15 MM	–	–	–	–	–	✓	✓	✓
WOOD BLOCK (STAB PARQUET) 19 – 22 MM	✓	–	–	–	✓	✓	✓	✓
WOOD BLOCK (STAB PARQUET) – ALL	✓	–	–	–	✓	✓	✓	✓
MOSAIC/CUBE WOOD FLOORING	–	–	–	–	–	✓	✓	✓
MOSAIC – BONDED PANELS	–	–	–	–	–	✓	✓	✓
10 MM SOLID WOOD FLOORING	–	–	–	–	–	✓	✓	✓
END GRAIN RE UP TO 30 MM	–	–	–	–	–	✓	✓	✓
END GRAIN GE FROM 30 MM	–	–	–	–	–	✓	✓	✓
SUBFLOORS / PRIMERS								
CEMENT SCREED	PE 414 Turbo	PE 414 Turbo	PE 420	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo
GYPSUM BASED SCREED	PE 420	PE 414 Turbo	PE 420	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo
DRY SCREED MATERIALS	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	–	PE 414 Turbo	–	–	–
MASTIC ASPHALT	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	–	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo	PE 414 Turbo

## MAIN APPLICATION:

✓ WOOD FLOORING

1) Up to 220 x 20 cm

The recommendations described here should only be used as a guide. Detailed product data sheets for all products are available which should be used as reference when using the products.



DISPERSION ADHESIVES		SPECIAL ADHESIVES	
UZIN MK 85 Turbo	UZIN MK 80	UZIN RK 33	UZIN RK 37
-	-	-	✓
-	✓	-	✓
-	-	✓	✓
✓	✓	-	✓
✓	-	-	✓
-	-	-	✓
-	-	-	✓
✓	✓	-	✓
✓	✓	-	✓
-	-	-	✓
-	-	-	-
-	-	-	-
PE 385	PE 385	-	-
PE 420	PE 420	-	-
-	-	-	-
-	-	-	-

## YOUR CONTACT TO UZIN IN GERMANY





## BUSINESS UNIT UZIN INTERNATIONAL



**Steffen-Jens Kallus**  
**Head of Business Unit UZIN International**  
steffen-jens.kallus@uzin-utz.com

## TECHNICAL SERVICES, PRODUCT MANAGEMENT AND MARKETING



**Alexander Magg**  
**UZIN Brand Manager**  
Telephone +49 731 4097-389  
alexander.magg@uzin-utz.com



**Ulrich Weng**  
**Head of Technical Customer Service Team UZIN**  
Telephone +49 731 4097-265  
ulrich.weng@uzin-utz.com



**Manfred Scherb**  
**Head of Product Management UZIN**  
Telephone +49 731 4097-268  
manfred.scherb@uzin-utz.com



**Frank Zaumsegel**  
**Technical Customer Service Export**  
Telephone +49 160 364 2150  
frank.zaumsegel@uzin-utz.com



**Andreas Renz**  
**Head of International Marketing Expert Team UZIN**  
Telephone +49 731 4097-466  
andreas.renz@uzin-utz.com



**Valentin Zeiler**  
**Technical Customer Service Export**  
Telephone +49 151 422 36233  
valentin.zeiler@uzin-utz.com

## CUSTOMER SERVICES



**Sina Hess**  
**Head of Customer Service**  
Telephone + 49 731 4097-163  
E-Mail: sina.hess@uzin-utz.com



**Sandra Hermann**  
**Great Britain | Ireland | North-America | Africa | Denmark | Switzerland**  
Telephone +49 731 4097-380  
E-Mail: sandra.hermann@uzin-utz.com



**Eva Eberhard**  
**Asia | Belgium | Netherlands | France | Italy | India | Pakistan | Portugal | Spain**  
Telephone +49 731 4097-275  
E-Mail: eva.eberhard@uzin-utz.com




**Herbert Scherer**  
**Oceania | South-America | Russia | CIS | South East Europe | Poland | Slovenia | Hungary**  
Telephone +49 731 4097-146  
E-Mail: herbert.scherer@uzin-utz.com



**Anita Kübek**  
**Norway | Sweden | Finland | Iceland | Turkey | UAE**  
Telephone +49 731 4097-142  
E-Mail: anita.kuebek@uzin-utz.com

# CONTACT ADDRESSES WORLDWIDE

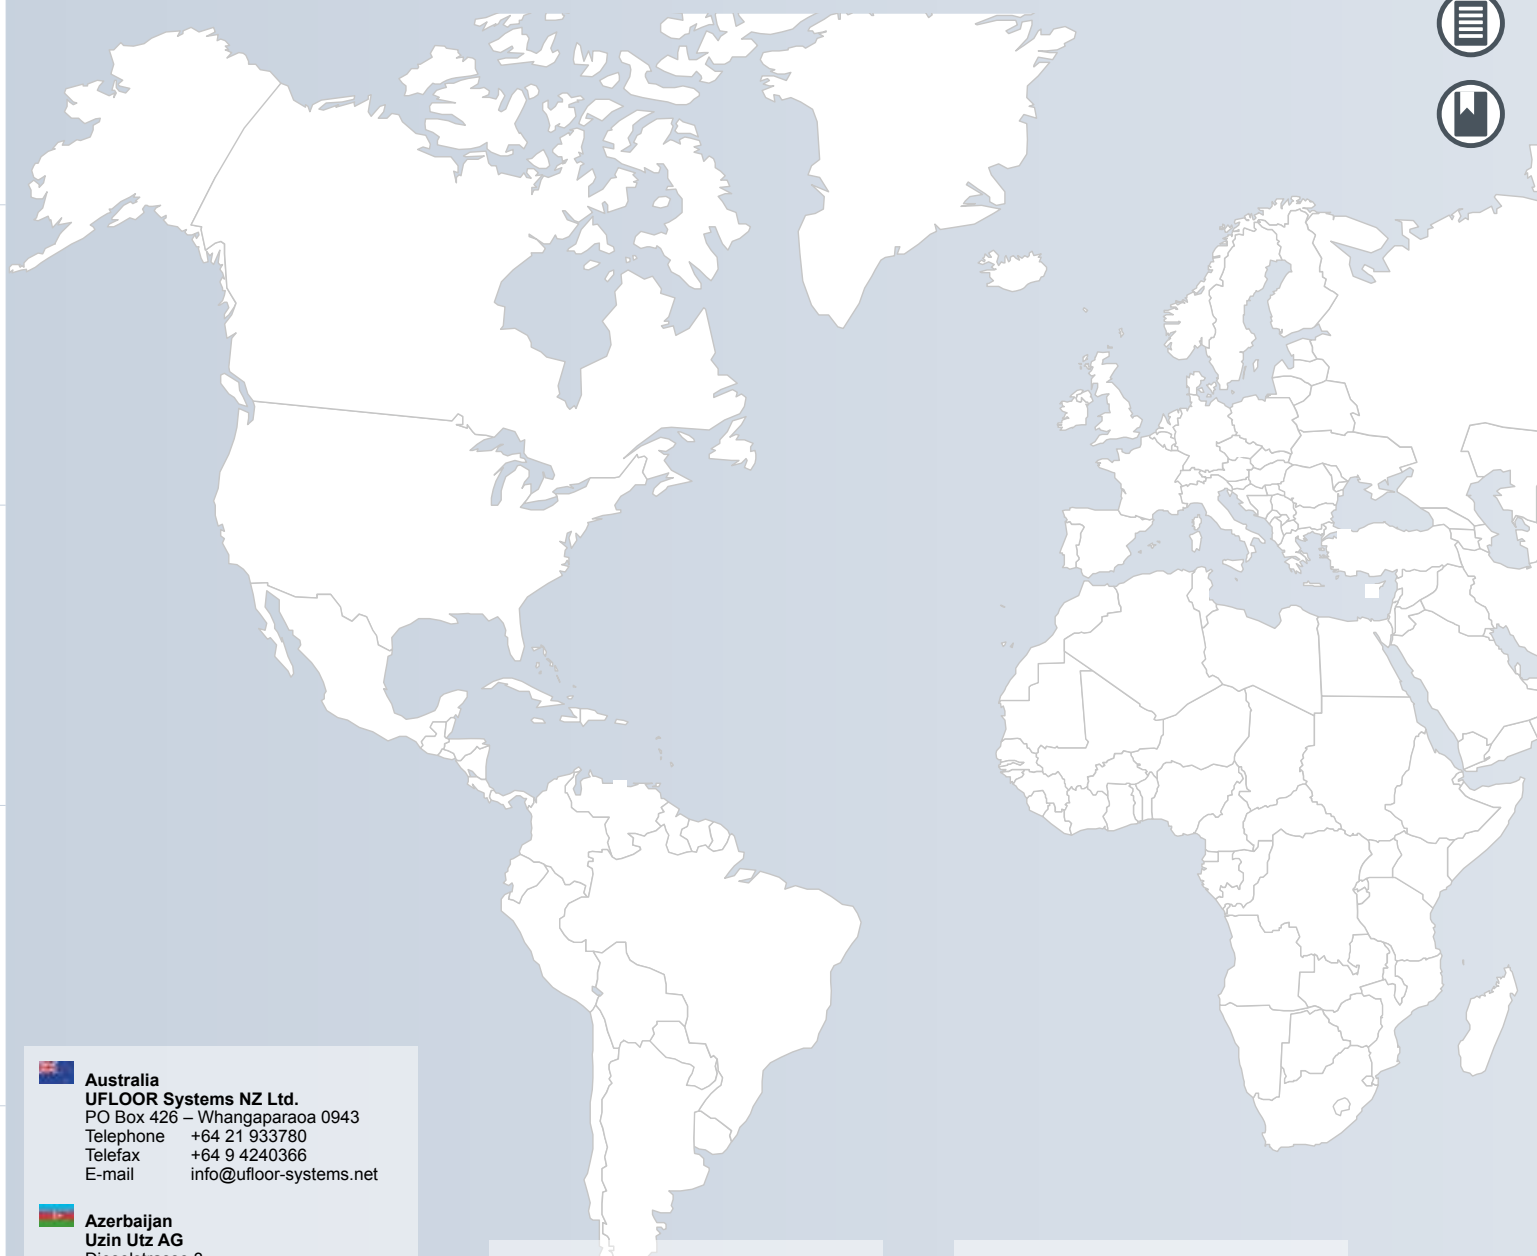

 **Australia**  
**UFLOOR Systems NZ Ltd.**  
 PO Box 426 – Whangaparaoa 0943  
 Telephone +64 21 933780  
 Telefax +64 9 4240366  
 E-mail [info@ufloor-systems.net](mailto:info@ufloor-systems.net)

 **Azerbaijan**  
**Uzin Utz AG**  
 Dieselstrasse 3  
 Germany, 89079 Ulm  
 Telephone +49 731 4097 205  
 Telefax +49 731 4097 107  
 E-mail [boris.schulmann@uzin-utz.com](mailto:boris.schulmann@uzin-utz.com)  
 E-mail [biuro@uzin-utz.com](mailto:biuro@uzin-utz.com)

 **Republik Belarus**  
**Representative Office Uzin Utz AG**  
 220035 Minsk  
 Cimirazieva Strasse 67, Office 932  
 Postfach 121  
 Telephone +375 (17) 235 00 50  
 Telefax +375 (17) 235 00 50  
 Mobil +375 (29) 655 56 26  
 Email [ivan.rak@uzin-utz.com](mailto:ivan.rak@uzin-utz.com)

 **Belgium**  
**Unipro België n.v.**  
 Poortakkerstraat 41a  
 B-9051 Gent  
 Telephone +32 9 2225848  
 Telefax +32 9 222 3380  
 E-mail [info@unipro.be](mailto:info@unipro.be)


 **China**  
**Uzin Utz Construction**  
**Materials (Shanghai) Co. Ltd.**  
 N° 3968 Huqingping Highway  
 Zhaoxiang – District Qingpu  
 Shanghai 201703  
 Telephone +86 21 5975 8220  
 Telefax +86 21 5975 8695  
 E-mail [adam.huang@uzin.com.cn](mailto:adam.huang@uzin.com.cn)

 **Croatia**  
**Unikem d.o.o.**  
 Trgovačka 6  
 CMP, Savica-Šanci  
 HR-10000 Zagreb  
 Telephone +385 1 2498214  
 Telefax +385 1 2498215  
 E-mail [info@unikem.hr](mailto:info@unikem.hr)

 **Cyprus**  
**IDS – Interior Design Services**  
**Total Solution Contract**  
 197 Old Nicosia  
 Limassol Road P.O. Box 11107  
 Nicosia  
 Telephone +357 22461133  
 Telefax +357 22610020  
 E-mail [idsids@cytanet.com.cy](mailto:idsids@cytanet.com.cy)

 **Czech Republic**  
**Uzin s.r.o.**  
 Českomoravská 12a  
 CZ-19000 Praha 9  
 Telephone +420 2 8308 3314  
 Telefax +420 2 8308 3419  
 E-mail [info@uzin.cz](mailto:info@uzin.cz)


 **Denmark**  
**Uzin Utz Denmark ApS**  
 Kongelundsvej 294  
 2770 Kastrup  
 Telephone +45 40 88 94 92  
 E-mail [info@uzin.dk](mailto:info@uzin.dk)

 **Finland**  
**Betton Oy**  
 Fallåker 1 D  
 FI-02740 Espoo  
 Telephone +358 9 5102 517  
 E-mail [info@betton.fi](mailto:info@betton.fi)  
 Internet [www.betton.fi](http://www.betton.fi)

 **France**  
**Uzin France SAS**  
 6 avenue du Professeur  
 André Lemierre  
 F-75980 Paris Cedex 20  
 Telephone +33 1 41632720  
 Telefax +33 1 41632721  
 E-mail [info@uzin.fr](mailto:info@uzin.fr)

 **Germany**  
**Uzin Utz AG**  
 Dieselstrasse 3  
 D-89079 Ulm  
 Telephone +49 731 4097 0  
 Telefax +49 731 4097 110  
 E-mail [info@uzin-utz.com](mailto:info@uzin-utz.com)

 **Greece**  
**Uzin Hellas**  
 Polychimiki G. Matziaris S.A.  
 14 km National Road  
 Thessaloniki-Veria  
 GR-57011 N. Anchialos  
 Telephone +30 2310 7229 912  
 Telefax +30 2310 7225 71  
 E-mail [uzin@otenet.gr](mailto:uzin@otenet.gr)

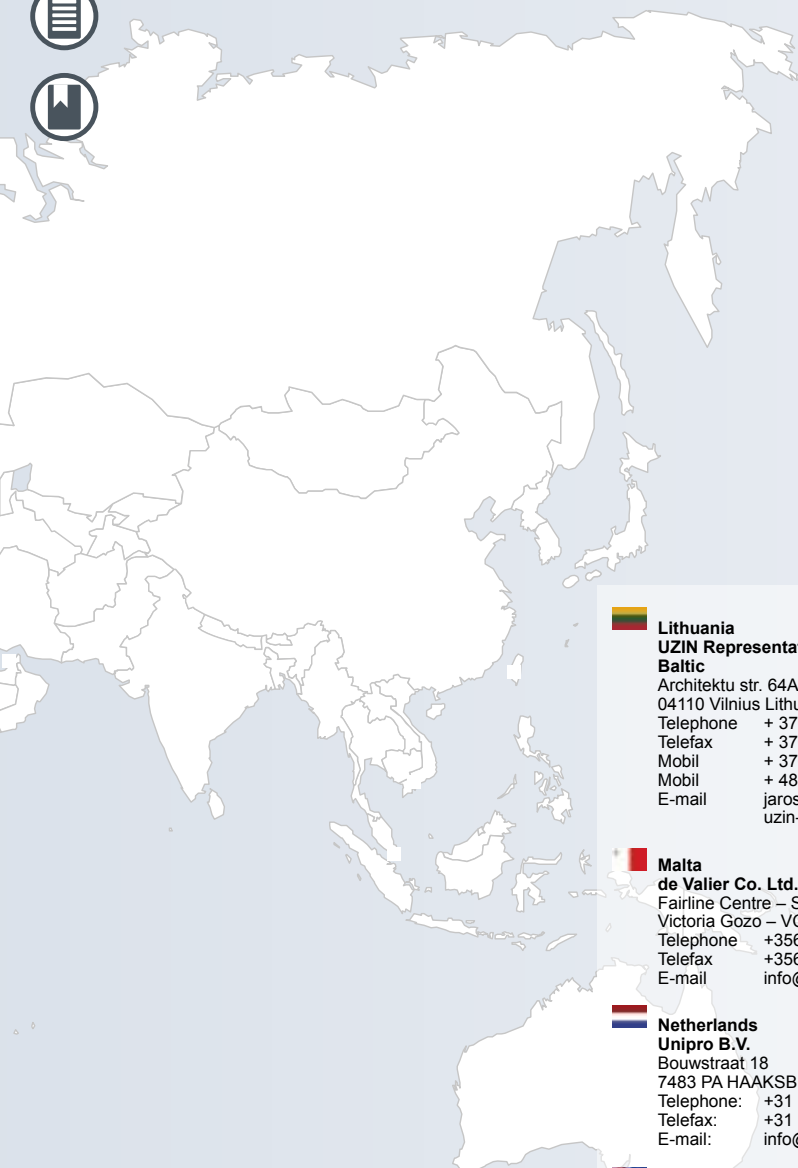


 **Hungary**  
**Uzin Utz**  
**Magyarország Kft.**  
 Újhegyi út 14  
 H-1108 Budapest  
 Telephone +36 1 431 9422  
 Telefax +36 1 431 9423  
 E-mail info-hungary@uzin-utz.com

 **Iceland**  
**Alfaborg ehf**  
 Skútuvogi 6  
 104 Reykjavík  
 Telephone +354 568 6755  
 Telefax +354 568 1277  
 E-mail alfaborg@alfaborg.is

 **Indonesia**  
**PT Uzin Utz**  
 Plaza Pasifik B2 No. 32  
 Kelapa Gading  
 ID – Jakarta 14240  
 Telephone +62 21 4587 6116  
 Telefax +62 21 4587 6115  
 E-mail sugi\_wei@yahoo.com

 **Italy**  
**Uzin Utz AG - Filiale Italia**  
 Luigi Riccio  
 Via Francesco Solimena, 155  
 IT-80129 Napoli  
 Telephone +39 348 3255 509  
 E-mail info.italia@uzin-utz.com

 **Lithuania**  
**UZIN Representative Office in Baltic**  
 Architektu str. 64A-19  
 04110 Vilnius Lithuania  
 Telephone +370 52 483788  
 Telefax +370 52 483788  
 Mobil +370 617 39271  
 Mobil +48 607 419 907  
 E-mail jaroslaw.baum@uzin-utz.com

 **Malta**  
**de Valier Co. Ltd.**  
 Fairline Centre – St. Marta Street  
 Victoria Gozo – VCT 2552  
 Telephone +356/21/556694  
 Telefax +356/21/554175  
 E-mail info@devalier.com.mt

 **Netherlands**  
**Unipro B.V.**  
 Bouwstraat 18  
 7483 PA HAAKSBERGEN  
 Telephone: +31 (0)53 5737373  
 Telefax: +31 (0)53 5737333  
 E-mail: info@uzin.nl

 **New Zealand**  
**UFLOOR Systems NZ Ltd.**  
 PO Box 426 – Whangaparaoa 0943  
 Telephone +64 21 933780  
 Telefax +64 9 4240366  
 E-mail info@ufloor-systems.net


 **Norway**  
**Uzin Utz Group Norge AS**  
 Elveveien 34 – bygg 4  
 N-3262 Larvik  
 Telephone +47 35 50 64 00  
 Internet www.uzin.no


 **Poland**  
**Uzin Polska Sp.z o.o.**  
 ul. Jaworzyńska 287  
 PL-59-220 Legnica  
 Telephone +48 76 723 9150  
 Telefax +48 76 723 9151  
 E-mail biuro@uzin-utz.com

 **Russia**  
**Uzin Utz AG**  
 Dieselstrasse 3  
 Germany, 89079 Ulm  
 Telephone +49 731 4097 205  
 Telefax +49 731 4097 107  
 E-mail boris.schulmann@uzin-utz.com  
 E-mail biuro@uzin-utz.com

 **Serbia**  
**Unihem Trading d.o.o.**  
 Kumodraška 257  
 11050 BEOGRAD  
 Telephone +381 11 3989 044  
 Telefax +381 11 3989 088  
 E-mail office@unihem.rs

 **Slovakia**  
**HA-UZ market s.r.o.**  
 Štrková ulica č. 94  
 SK-01001 Žilina  
 Telephone +421 41565 1794  
 Telefax +421 41500 6014  
 E-mail ha-uz@za.psg.sk

 **Slovenia**  
**Unihem d.o.o.**  
 Kajakaska c.30  
 SLO-1211 Ljubljana  
 Telephone +386 1 511 0200  
 Telefax +386 1 5116290  
 E-mail prodaja@unihem.si

 **South Africa**  
**Contract Flooring Distribution (Pty) Ltd.**  
 22 Dublin Road  
 Brabley View Ext 6  
 Johannesburg 2090  
 Telephone +27 11 882 1000  
 Telefax +27 11 882 5403  
 E-mail info@cfdflooring.co.za

 **Spain**  
**Laboratorios Rayt S.A.**  
 Garriga, 188-200 P.O.Box 39  
 E-08910 Badalona  
 Telephone +34 93 460 7820  
 Telefax +34 93 383 6356  
 E-mail info@rayt.com

 **Sweden**  
**Englund-Gruppen Sverige**  
 Kryptogatan 20  
 S-43153 Mölndal  
 Telephone +46 31 670170  
 Telefax +46 31 871 678  
 E-mail stefan.englund@englund-gruppen.se

 **Switzerland**  
**Uzin Tyro AG**  
 Ennetbürgerstr. 47  
 CH-6374 Buochs  
 Telephone +41 41 624 4888  
 Telefax +41 41 624 4889  
 E-mail info@uzin-tyro.ch

 **Turkey**  
**DENLAKS Adhesives**  
 Cihangir Mash. Güvercin Cad. No:11  
 Haramidere  
 Avcılar 34310 Istanbul  
 Telephone +90 212 4221100  
 Telefax +90 212 4221099

 **United Kingdom**  
**Uzin Ltd.**  
 Unit 2, Mitchell Court  
 Central Park, Rugby  
 Warwickshire, CV23 0UY  
 Telephone +44 1788 530 080  
 Telefax +44 1788 536 508  
 E-mail info@uzin.co.uk

 **Ukraine**  
**UZIN Representative Office**  
 Dr. Yuri Rudchenko  
 DIC, 43, Borodinskaya St.  
 49029 Dnepropetrovsk, Ukraine  
 Telephone +38 056 744 8843  
 Telefax +38 056 448843  
 E-mail uzinua@i.ua

 **USA & Canada**  
**UFLOOR Systems Inc.**  
 14509 E; 33rd Place  
 Unit G  
 Aurora, CO 80011  
 Telephone +1 720 374 4810  
 Telefax +1 720 374 2113  
 E-mail info@ufloorsystems.com

**All other countries:**  
**Uzin Utz AG**  
 Dieselstrasse 3, D-89079 Ulm  
 Telephone +49 731 4097 0  
 Telefax +49 731 4097 110  
 Internet www.uzin.com

# INDEX

SUBFLOORS | SCREED

SUBFLOOR PREPARATION

FLOOR COVERING ADHESIVES

switchTec®

WOOD FLOORING INSTALLATION

TOOLS | ACCESSORIES

SERVICE

Cork Rubbing Board textile-covered	92
Ergo-Star	91
Half moon blade	41
Large Surface Rake	90
Rubber Hammer	92
Screed Anchors	36, 84
Screed Rake	90
Spike Roller	90
Trimming-Knife Blades	91
Trowel Blades	92
UZIN ATD 100	78
UZIN Clean-Box	85
UZIN Conductive Copper-Strip	58, 85
UZIN DK 290 Thermocoll	54
UZIN Epoxy Accelerator	87
UZIN Epoxy Colourant	87
UZIN ER 200	34
UZIN ES	34, 86
UZIN Foam Expansion Strip	84
UZIN Foam Expansion Strip B	84
UZIN Fondur MK	88
UZIN KE 16	43
UZIN KE 66 L	56
UZIN KE 66 NEW	47, 48
UZIN KE 418	43
UZIN KE 603	52
UZIN KE 2000 S	43, 46
UZIN KE 2000 SL	57
UZIN KE 2428	47
UZIN KR 410	34
UZIN KR 416	35
UZIN KR 421 L	58
UZIN KR 430	47
UZIN KR 516	35
UZIN LE 42	51

UZIN LE 43	51
UZIN LE 44	50
UZIN Levelling Compound Mixer	90
UZIN Levelpin	84
UZIN Mixing Bucket	89
UZIN MK 80	80
UZIN MK 85 Turbo	80
UZIN MK 92 PLUS	79
UZIN MK 92 S	79
UZIN MK 92 S dark	79
UZIN MK 95	78
UZIN MK 150	77
UZIN MK 200	77
UZIN MK 200 PLUS	77
UZIN MK 250	76
UZIN MS Structural Adhesive	87
UZIN Multilift	55
UZIN Multimoll SoftSonic 3 mm	82
UZIN Multimoll Top 4 NEW, Top 7, Top 12	38, 82
UZIN Multimoll Vlies NEW	82
UZIN NC 110	32
UZIN NC 115	33
UZIN NC 117	33
UZIN NC 118	27
UZIN NC 145	30
UZIN NC 150	30
UZIN NC 160	30
UZIN NC 170 LevelStar	29
UZIN NC 172 BiTurbo	31
UZIN NC 174	81
UZIN NC 175	31
UZIN NC 182	26
UZIN NC 195	31
UZIN NC 405	27
UZIN NC 888	27

UZIN PE 260 NEW	22
UZIN PE 262 L	58
UZIN PE 280	22
UZIN PE 360 PLUS	21
UZIN PE 385	80
UZIN PE 400	25
UZIN PE 414 Turbo	24, 74
UZIN PE 420	75
UZIN PE 425	24
UZIN PE 460	25
UZIN PE 480	25
UZIN PE 630	23
UZIN PE-Foil	41
UZIN Primer Rollers	88
UZIN PUR Accelerator	87
UZIN Quartz Sand 0.8	86
UZIN Quartz Sand 2.5	86
UZIN Reinforcement Fibre	37, 85
UZIN Reinforcement Webbing	85
UZIN RenoTop PLUS	41
UZIN Ripper	89
UZIN RK 33	81
UZIN RK 36	52
UZIN RK 37	81
UZIN Rollers	54
UZIN RR 181	38
UZIN RR 181 FR	38
UZIN RR 183 Ebofloor	39
UZIN RR 185	39
UZIN RR 186 Eboflex	39
UZIN RR 188	40
UZIN RR 189 Plus FR	40
UZIN RR 201	36
UZIN RR 203 NEW	37
UZIN SC 910	18





UZIN SC 914 Turbo	16
UZIN SC 960	17
UZIN SC 966	17
UZIN SC 970	17
UZIN SC 980	16
UZIN SC 993	18
UZIN SC 995	19
UZIN SC 997	19
UZIN Silicone Brush	54, 89
UZIN Solid board notched trowel NEW	91
UZIN Turbolight®-System	15
UZIN U 1000	55
UZIN U 2100	56
UZIN U 3000	49
UZIN Universal Tackifier NEW	55
UZIN UZ 57	44
UZIN UZ 57 L	57
UZIN UZ 88	45, 51
UZIN UZ 90	45
UZIN VE 124	88
UZIN Water Bucket	89
UZIN WK 222	53
UZIN Wood flooring notched trowel	91
UZIN WP 622	28
UZIN XS	35, 86

## switchTec®

Bullran 45	69
Contact	68
Contact 40	69
Contact / Bullran Applicator	70
Cork Rubbing Board textile-covered	62
Goman 50	71
Goman 90	72
Goman 240	72
Planus	62
Pomur 46	68
Remur 45, 55, 95	71
Rubber Hammer	70
Sigan 1	60
Sigan 2	63
Sigan 3	65
Sigan Elements	64
Sigan Elements Plus	61
Sigan Elements Universal Tape	66
Sigaway	65
Steptec	72
SUPERTape 7900	65
Toptac 35	67
Toptac Applicator	70
WOLFF Stair iron with roll	71

## WOLFF

Design Collection	92
Hygrometer Universal V1-D4	93
Power X 1100	93
Stirring station, 75 litre, complete	93
Transportation caddy, 30 l	93



# SIMPLY A CLEAN SOLUTION.



Use the new UZIN Ripper to empty and mix levelling compounds without a mess.



For more Information visit [www.uzin.com](http://www.uzin.com)

# WE LIVE FLOORS! STRONG BRANDS FOR STRONG WORKMANSHIP.

The Uzin Utz AG is a company that essentially incorporates a whole wealth of flooring skills.

With the brands UZIN, WOLFF, PALLMANN, Arturo, codex, and RZ, we offer an extensive range of products, systems and services. We encompass anything and everything to do with the installation, renovation, and maintenance of all types of floor coverings, wood flooring, coatings, ceramic tiles and natural stone floors.

For all questions concerning flooring we are a competent and reliable partner.



**UZIN. The floor belongs to you.**

Installation systems for screeds, flooring and wood flooring.



**WOLFF. Going beyond your limits.**

Machinery and special tools for subfloor preparation and installation of floor coverings.



**PALLMANN.**

Complete product range for the installation, renovation and maintenance of wood flooring.



**Arturo. What a floor can do.**

Resin flooring with passion for design.



**codex. Exclusive to real tilers.**

Installation systems for tiling and natural stone.



**RZ. We love floors.**

Cleaning and care systems for all types of floor coverings.

**UZIN** | A Brand of Uzin Utz AG

Uzin Utz AG | Dieselstrasse 3 | D-89079 Ulm  
Telephone +49 (0)731 4097-0 | Telefax +49 (0)731 4097-110  
E-mail [info@uzin.com](mailto:info@uzin.com) | Internet [www.uzin.com](http://www.uzin.com)