

SMARTBOOK

october, 31st 2018

GAZZOTTI

Feeling wood flooring

Gazzotti wood flooring since 1910

- 3 Life
- 6 Vintage
- 10 Smile
- 13 Extraresistent
- 15 Free Time
- 18 Transit
- 20 SPC
- 22 Selections
- 23 Accessories
- 25 Merchandising
- 26 General sales conditions

Gazzotti's history begins in 1910 at the foot of basilica San Luca in Bologna.

Since its establishment the company has been a reference point for quality parquet and has soon become the favorite supplier of the **Royal Family**.

100 years of experience, knowledge of nature and raw materials, our passion for beauty and design, technological and aesthetic innovations, combined together to produce beautiful, exciting wood flooring pleasing to the touch, environmentally friendly and unmistakably Italian.

Gazzotti wood flooring is made in Italy and its production is 100% inspected: each piece leaving the factory is **checked** individually to become an international ambassador of our centennial tradition of **Italian style in quality**, innovation and design.

This tradition is renewed, starting from the end of 2018, by the new Gazzotti 18 Società Cooperativa, whose founders are a group of precious Gazzotti workers. The mission is to preserve and to develop this secular history.



LEONELLO GAZZOTTI
BOLOGNA

VIALE VELODROMO 900² (FUORI PORTA SAFFI)

STABILIMENTO PER LA LAVORAZIONE
DEI PARCHETTI COMUNI E DI LUSO

Life



Life is the Gazzotti range for those who want **Knots and fissures**. Life tells us the wood's story through a prestigious floor, with a very high care of the knots, including some large in size, and fissures, two features detail and with an **extremely natural appearance**. normally seen in the wild that increase the product's naturalness.

Life highlights all the original characteristics of the raw material, **Hand planing**. Life floors are gently planed, following traditional methods. Because it is carried out by hand, the planing highlights the knots, accentuating

Life floors are valued for the appearance of the wood, the product's extremely natural appearance.

but also for their **attention to detail**, which creates a highly **captivating floor for noteworthy, elegant rooms**. **Bevel dented by hand**. Life's prestigious format is reinforced by the bevelling on all four sides, made wonderfully irregular through denting.

French Oak. Life is a 3-ply parquet made of French oak, a unique species of wood due to the definition of the raw material and its particularly effective reaction to colour treatments.



The exclusive wood flooring

Engineered flooring for fully glued down or floating installation, planed and dented bevel.

Planche
Hand planed
Thickness 15 mm
Width 190 mm
Length 1800 -> 2000 mm

Grande Planche
Hand planed
Thickness 15mm
Width 260 mm
Length 2000 -> 2400 mm

Colour	Selections		
Quercia Degas	Emotion	609D6	619D6
Quercia Matisse	Emotion	607M6	617M6
Quercia Monet	Emotion	609M6	619M6
Quercia Morisot	Emotion	607Z6	617Z6
Quercia Pissarro	Emotion	609W6	619W6
Quercia Renoir	Emotion	609R6	619R6
Quercia Sisley	Emotion	609Y6	619Y6

- **Matching accessories:** skirting boards, stair profiles and thresholds.
- Life has a three-layer structure with top layer and counter balancing in 4 mm **French Oak**.
- The material is supplied in assorted lengths, depending on availability. Up to 5% may be in lengths shorter than those stated above, to be cut to fill gaps between the laid parquet and the wall.
- Certain products are dyed appropriately on the upper surface. Different grains absorb varying levels of the dye, creating a varied appearance. These clear contrasts create a product with unique features. The person laying the floor should bear this in mind, ensuring the best possible distribution of the strips for the optimum aesthetic result.
- The finish is obtained through a special treatment that in no way effects the naturalness of the product.
- **The product includes knots and fissures, some of which are large, either filled flush to the surface or slightly underfilled.**
- **All products are planed by hand and give suitable emphasis to the knot's significance: the lack of aesthetic homogeneity is one of the product's specific features.**
- All the products are bevelled: the bevel is dented by hand following ancient traditions.
- The product can be supplied in two widths, for laying patterns with two widths.
- All products in Life range are delivered within **45 working days**.

To avoid uncorrect maintenance, each delivery comes with a Cleaning and AntiAge Gazzotti Maintenance Products. Maintenance carried out with other products can cause potentially irreparable damage to the finish of Life parquet.



Quercia Degas



Quercia Matisse



Quercia Monet



Quercia Morisot



Quercia Pissarro



Quercia Renoir



Quercia Sisley

Vintage



Vintage wood flooring, thanks to its microporous finish it's resistant to scratches and superficial wear, but it also gives an extraordinary natural feel offering the sensation to be always in contact with the wood.

Vintage range offer a wide choice of colours, in 3 different dimensions and different surface processing to obtain brushed surfaces, "antique effect" surfaces, "saw cutting effect" surfaces.

All plancia 10 and XX Large products are bevelled on 4 sides, while Nat finishing enables to obtain a finished plank with the saw feel of a raw surface.

Rovere Boston and Rovere Toronto have particularly been developed to give a "worn effect" to the floor.



The eco-friendly parquet

Engineered flooring with microporous oil effect finish.

10
Thickness 10-11 mm
Width 65->72 mm
Length 400->600 mm
Brushed

Plancia 10
Thickness 10 mm
Width 130->155 mm
Length 1200->2200 mm
Brushed

Plancia 10
Thickness 10 mm
Width 130->145 mm
Length 1200->2200 mm
Saw cutting effect

Plancia 10
Thickness 10 mm
Width 130->155 mm
Length 1200->2200 mm
Antique effect

Colour	Selections				
Oak	Feeling	4E80T	5A80T	5A80S	5A80V
Oak	Emotion		5A9H6	5A9HS	5A9HV
Oak Nat	Emotion		5A9E6	5A9ES	5A9EV
Oak Armagnac Maison	Feeling		5A8T6	5A8TS	5A8TV
Oak Grace	Feeling		5A87T	5A87S	5A87V
Oak Nuance	Feeling		5A7BT		
Oak Sand	Feeling		5A82T		
Oak Sand	Emotion		5A826		
Quercia Reserve	Emotion		5A8P6	5A8PS	5A8PV
Oak Valencia	Emotion		5A9V6	5A9VS	5A9VV
Oak Boston	Emotion		5A9B6	5A9BS	5A9BV
Oak Toronto	Emotion		5A9T6	5A97S	5A9TV

- **Matching accessories:** skirting boards, stair profiles and thresholds.
- The nominal thickness of the top layer is 4 mm for all sizes except for Plancia 10 with 3 mm top layer.
- All formats are bevelled on all four sides except for size 10.
- The material is supplied in assorted lengths, depending on availability. Up to 5% may be in lengths shorter than those stated above, to be cut to fill gaps between the laid parquet and the wall. Orders of single lengths are subject to a 10% increase in the

- price listed.
- The Emotion selection includes open and/or filled knots.
- **European Walnut (Italian Walnut Junglas Regia) products are not brushed. Dimensions: 15x200x1500->2300 mm.**
- Nat products are treated with a durable and completely natural finish that does not alter the colour of the wood. The surface feels rougher as a result, as if newly sawn.
- All products can either be glued or laid floating

(except for 10, which must be glued down).

• **Delivery time: 30 working days**

To avoid incorrect maintenance, each delivery comes with Cleaning and AntiAge Gazzotti Make Up pack. Maintenance carried out with other products can cause potentially irreparable damage to the finish of Vintage parquet.

Vintage wood flooring, thanks to its microporous finish it's resistant to scratches and superficial wear, but it also gives an extraordinary natural feel offering the sensation to be always in contact with the wood.

Vintage range offer a wide choice of colours, in 3 different dimensions and different surface processing to obtain brushed surfaces, "antique effect" surfaces, "saw cutting effect" surfaces.

All plancia 10 and XX Large products are bevelled on 4 sides, while Nat finishing enables to obtain a finished plank with the saw feel of a raw surface.

Rovere Boston and Rovere Toronto have particularly been developed to give a "worn effect" to the floor.



The eco-friendly parquet

Engineered flooring with microporous oil effect finish.

XX Large
Thickness 15 mm
Width 180->200 mm
Length 1400->2300 mm
Brushed

XX Large
Thickness 15 mm
Width 180->200 mm
Length 1400->2300 mm
Saw cutting effect

XX Large
Thickness 15 mm
Width 180->200 mm
Length 1400->2300 mm
Antique effect

Colour	Selections			
Oak	Feeling	5G80T	5G80S	5G80V
Oak	Emotion	5G9H6	5G9HS	5G9HV
Oak Nat	Emotion	5G9E6	5G9ES	5G9EV
Oak Armagnac Maison	Feeling	5G8T6	5G8TS	5G8TV
Oak Grace	Feeling	5G87T	5G87S	5G87V
Oak Nuance	Feeling	5G7BT		
Oak Sand	Feeling	5G82T		
Oak Sand	Emotion	5G826		
Quercia Reserve	Emotion	5G8P6	5G8PS	5G8PV
Oak Valencia	Emotion	5G9V6	5G9VS	5G9VV
Oak Boston	Emotion	5G9B6	5G9BS	5G9BV
Oak Toronto	Emotion	5G9T6	5G9TS	5G9TV
European Walnut	Emotion	4G606		

- **Matching accessories:** skirting boards, stair profiles and thresholds.
- The nominal thickness of the top layer is 4 mm for all sizes except for Plancia 10 with 3 mm top layer.
- All formats are bevelled on all four sides except for size 10.
- The material is supplied in assorted lengths, depending on availability. Up to 5% may be in lengths shorter than those stated above, to be cut to fill gaps between the laid parquet and the wall. Orders of single lengths are subject to a 10% increase in the

price listed.

- The Emotion selection includes open and/or filled knots.
- **European Walnut (Italian Walnut Junglas Regia) products are not brushed. Dimensions: 15x200x1500->2300 mm.**
- Nat products are treated with a durable and completely natural finish that does not alter the colour of the wood. The surface feels rougher as a result, as if newly sawn.
- All products can either be glued or laid floating

(except for 10, which must be glued down).

- **Delivery time: 30 working days**

To avoid incorrect maintenance, each delivery comes with Cleaning and AntiAge Gazzotti Make Up pack. Maintenance carried out with other products can cause potentially irreparable damage to the finish of Vintage parquet.




Oak (Feeling)



Oak (Emotion)



Oak Nat

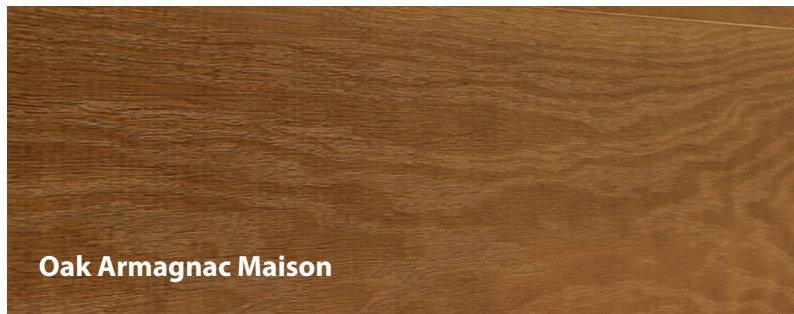

Oak Armagnac Maison



Oak Grace




Oak Nuance



Oak Sand (Feeling)



Oak Sand (Emotion)

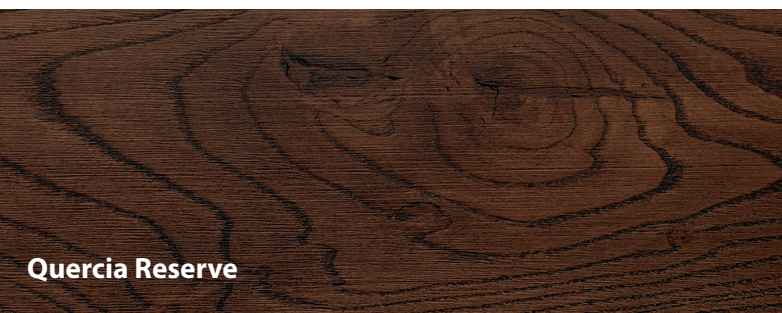

Quercia Reserve



Oak Valencia



Oak Boston



Oak Toronto



European Walnut

Smile



Smile is a range dedicated to those who want high-quality floors resulting from the heat treatment given to the raw (with highly durable finishes and brushing) at an affordable price. The timber appears naturally aged as a result.

Cutting-edge finishes, stylish colours and versatile dimensions allow you to enjoy your home with a smile. All the XXL large products contain knots, including some large in size, enhancing the natural and tangible appearance of the wood in its large size format.

The Quercia Temperata version is a unique product



Free your desire
for a wood floor

10
Thickness 10-11 mm
Width 65-> 72 mm
Length 400 -> 600 mm
Brushed

X Large 10
Thickness 10 mm
Width 110-> 125 mm
Length 800 -> 1300 mm
Brushed

XX Large
Thickness 15 mm
Width 180-> 200 mm
Length 1400 -> 2300 mm
Brushed

Colour	Selections		
Oak	KNS	4A806	40806
Oak	KNOT		50SN6
Oak Spina Italiana	KNS	52806	
Oak Polare	KNS		40P86
Oak Polare	KNOT		850P86
Oak Sabbiato	KNS		40S16
Oak Sabbiato	KNOT		50S16
Oak Greige	KNS		40GR6
Oak Greige	KNOT		50GR6
Oak Anticato	KNS		40816
Oak Anticato	KNOT		50816
Quercia Temperata	KNS		40T16


- **Matching accessories:** skirting boards, stair profiles and thresholds.
- Quercia Temperata undergo a special heat treatment to obtain a wonderfully natural play of colours. A range of hues, sometimes very distinct, can occur - this is a special feature of the product. Heat-treated products tend to become lighter in colour over time.
- The nominal thickness of the top layer is 4 mm for all formats.
- The material is supplied in assorted lengths, depending on availability. Up to 10% may be in lengths shorter than those stated above, to be cut to fill gaps between the laid parquet and the wall. Orders of single length are subject to a 10% increase in the price listed.
- All Smile products must be glued, except for the Large format, which can also be laid as a floating floor.
- The XX Large products are micro-bevelled on all four sides to highlight the format.
- **Fire reaction: all products in the X Large 10 range - with the exception of Quercia Temperata - have Cfl-s1 classification as for their reaction to fire, if laid on incombustible foundations.**



Oak



Oak Polare

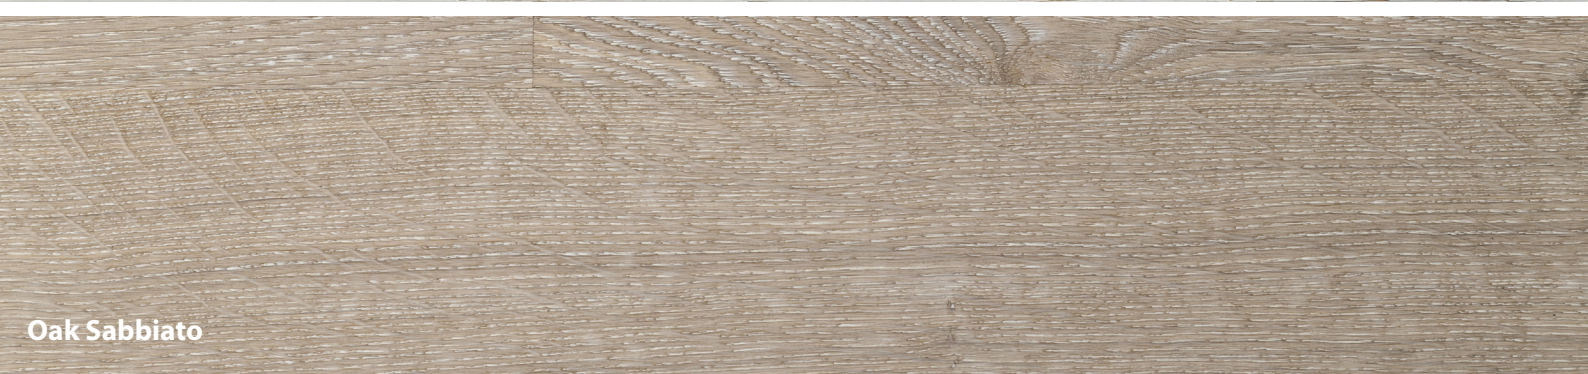


Oak Sabbiato



Oak Greige



Oak Anticato

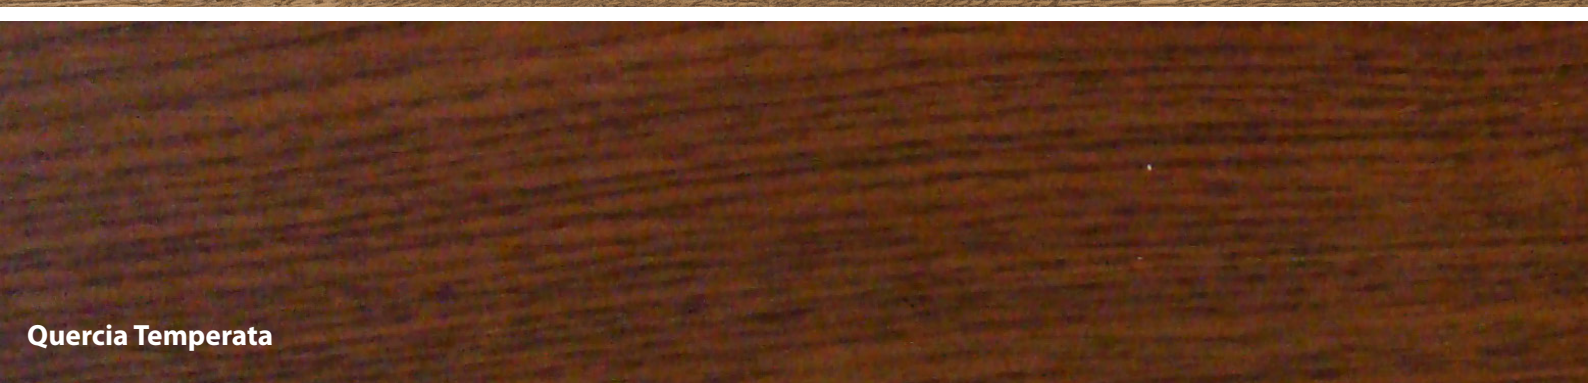

Quercia Temperata

EXTRARESISTENT



Since 1978, Extraresistent is the perfect floor for the whole family and it is still manufactured with its peculiar resistance, beauty and practicality of use characteristics.

Due to its closed-pore sanitizing finish it is the perfect choice for families with small children and pets. Plancia 10 has a slightly brushed surface to highlight the natural grain of the wood.

Sanitising finish

Pre-finished engineered wood floors for glue-down installation



Plancia 10
Thickness 10 mm
Width 130->155 mm
Length 1200->2200 mm
Brushed

Colour	Selections	
Oak	Feeling	49806
Oak Botte	Feeling	49706
Oak Neve	Feeling	49716

- **Matching accessories:** skirting boards, stair profiles and thresholds.
- All Plancia 10 products are microbevelled on all four sides to highlight the prestige of the formats.
- The materials is supplied in assorted lengths, depending on availability. Up to 15% may be in shorter length than those stated above to be used for cuts against the walls. Orders of pieces of "only one length" are to be confirmed and subject to a 10% price increase.

Oak

Oak Botte

Oak Neve

freetime



Free Time is the collection of solid outdoor wood floors. Due to the high resistance to weathering and the elegant aesthetics Free Time is the ideal solutions for terraces, gardens, poolsides and similar.

Free Time is manufactured in Ipè, which is one of the best wood species in terms of stability for external use.

The product can be supplied with unfinished surface or pre-oiled surface.



Outdoor wood deckings

Solid outdoor wood floors.

■ Unfinished

■ Oiled

Colour		
PLANKS IPÈ For laying on floating support profiles with retractable clips or visible screws. Lateral symmetric milling, tongue and groove joint on short ends, one riffled and one smooth face. Dimensions: thickness 19 mm - width 90 mm - length 1500 mm	FB383	FL383
PLANKS IPÈ For laying on floating support profiles with retractable clips. Lateral concealed milling, tongue and groove joint on short ends, smooth upper face. Dimensions: thickness 24 mm - width 134 mm - length 1500 mm	FB384	FL384

Accessories		
SUPPORT PROFILES - EXOTIC WOOD Dimensions: thickness 20 mm - width 40 mm - length 900/2000 mm Recommended quantity: 2,5 ml/m ² of floor	FD000	
ASSEMBLY KIT (CLIP + SCREWS) Recommended quantity: 27 kits/m ² . Composition: 1 clip inox steel AISI 304 and 2 ceramized steel screws.	FE004	
SUNDECK OIL Maintenance of Free Time floors (bucket of 5 litres)	FO000	

- During assembly, follow the instructions on the product information sheet carefully.
- The slats must be laid floating at intervals no greater than 300 mm.
- Unfinished Free Time floors must be treated with Sundeck Oil at the time of laying to offer suitable protection to the wood, and then whenever necessary, to give the wood a new lease of life or further protection (quantity needed: approx. 1 l for 15 m²).
- Over time, outdoor flooring tends to become grey, and small fissures and natural movements may occur.



Planks Ipè



Planks Ipè, lateral concealed milling

TRANSIT
by Gazzotti



Transit is the collection of laminate floors by Gazzotti. It is an easy, safe and economic solution both for workspaces and private houses. The surface has knots and crecks reproduced in 3D effect to copy the natural look of the wood. The technology and the materials guarantee the maximum resistance to UV rays, stains and dents.

Transit products are available in Style7 AC3 range with a complete colour offer. Transit is also Cfl-s1 class for fire reaction and is suitable for use on heated floors.



Laminate flooring

Laminate flooring with waterproof HDF support glueless floating installation.

Style7 AC3

Thickness 7 mm

Width 194 mm

Length 1286 mm



Colour	Selections	
Quercia Artica	Plancia	TD7W0
Quercia Bianca	Plancia	TD8Q0
Quercia Grigia	Plancia	TD7D0

- All Transit floors are anti-static.
- **All Transit floors have Cfl-s1 fire resistance classification.**

Quercia Grigia

Quercia Bianca

Quercia Artica

SPC



Gazzotti introduces a new range of vinilyc floors, which are the ideal solution in terms of strength and “easy maintenance”. Therefore they are especially suggested in HORECA applications, that means hotels, bars, shops, officies, fitness rooms, etc.

SPC product has one printed paper decorative layer and one transparent PVC finishing layer: both are applicated on a panel made by the mix of powdered mineral fiber with a plastic polymer

(Solid Polymer Core). This is the newest development in floating LVT design floors with click system. It has top-performances in terms of stability against temperature and humidity changes; the wear layer thickness of 0,55 mm (EN ISO 23340) is also a long life warranty. The subfloor must not be levelled, but it has to be flat. The underlay is already attached to the SPC, therefore this product can be easily and quickly installed.

Sense F

Thickness 4,7 mm (3,5 SPC + 1,2 PU)
Wear layer thickness 0,55 mm
Width 225 mm
Length 1230 mm

Sense G

Thickness 6,5 mm (4,5 SPC + 2,0 PU)
Wear layer thickness 0,55 mm
Width 225 mm
Length 1230 mm

Colour	Selections	
170	Plancia	SP170
390	Plancia	SP390
E15	Plancia	SPE15
E50	Plancia	SPE50

- SPC floors (Solid Polymer Core) are the newest development in floating LVT design floors with click system.
- A high density PE underlay is pre-assembled, therefore the installation does not need any further accessory.
- Both products are classified in class of use 23 (domestic use), 33 (commercial use), 42 (industrial use) according to EN 685.
- Both products are classified Bfl-s1 in terms of fire resistance (EN 13501-1)



170



390



E15



E50

Selections

References standard

All Gazzotti wood floors comply with the standard **EN 14342 - Wood flooring - Characteristics, evaluation of conformity and marking**.

Gazzotti selections

Gazzotti offers 6 selections, according to the features of the wood species and of the products, all with the same construction quality but with different look. Every selection has been specifically invented to share different visual emotions for each line and to expand our range. All these selections follow the standard EN 13489. They are free commercial appearance classifications.

Characteristics	Feeling	Green	Emotion	Family	KNS	KNOT
Sound sapwood	not allowed	slight traces allowed	slight traces allowed	slight traces allowed	slight traces allowed	slight traces allowed
Knots (sound, integrown, unsound)	less or equal to Ø ≤ 20 mm	less or equal to Ø ≤ 30 mm	allowed	less or equal to Ø ≤ 20 mm	less or equal to Ø ≤ 30 mm	less or equal to Ø ≤ 50 mm
Yellow stain	allowed	allowed	allowed	allowed	allowed	allowed
Checks	allowed if blind	allowed if blind	allowed if blind	allowed if blind	allowed if blind	allowed if blind
Bark pockets	allowed if close	allowed	allowed	allowed if close	allowed	allowed
Lightning shakes	not allowed	not allowed	allowed	not allowed	not allowed	not allowed
Curly grain	allowed	allowed	allowed	allowed	allowed	allowed
Slope of grain	allowed	allowed	allowed	allowed	allowed	allowed
Sound heart	not allowed	not allowed	not allowed	not allowed	not allowed	not allowed
Colour variation (including blackheart, read heart,..)	allowed	allowed	allowed	allowed	allowed	allowed
Stick marks	not allowed	not allowed	not allowed	not allowed	not allowed	not allowed
Medullary ray	allowed	allowed	allowed	allowed	allowed	allowed
Biodeterioration	not allowed except for blueing	not allowed except for blueing	not allowed except for blueing	not allowed except for blueing	not allowed except for blueing	not allowed except for blueing
Non-visible parts	All features permitted without any limitation as to size or quantity if these do not impair the strength or wearing quality of the parquet flooring.					

Product sheets

The Gazzotti product sheet is attached to the shipping documents. It is a very important document containing information on the product features, conditions of the guarantee validity, on the installation, the correct maintenance e preservation of the product. The product sheet, by law, must follow the product until the final customer has taken vision. The retailer has to take care about this, otherwise he is responsible.

Accessories

Glues

EG DUE

Two-components epoxy-polyurethane adhesive

Odourless, solvent and water free, for all types of non absorbent foundations and parquet.

Pack 9+1 kg - **A4002**

Maintenance

Buying a wooden floor is often a significant investment. For this reason Gazzotti has created a range of maintenance and restoration products to help your floor last as long as possible.

Parquet maintenance is very important to save wood natural beauty. Parquet floors have a very long life due to wood characteristics, but it is necessary to use appropriate maintenance products and Gazzotti has developed the best products to be used for its floors.

Note: the use of different maintenance products can cause potentially irreparable damage to the wood floor.

CLEANING Daily maintenance

1 lt. pack
DN001

This is a cleaner for all Gazzotti surfaces which, as well as removing dirt effectively, prevents mould, bacteria and pathogen from forming, leaving a pleasant aroma in the air.

ANTI AGE Extraordinary maintenance

1 lt. pack
DN002

This is an emulsion made of natural waxes and oils. It restores the protective layer and lessens the effect of scratches and surface wear. For all Gazzotti finishes, but specifically for the Vintage and Life collections.

PARQUET LIGHT Extraordinary maintenance

1 lt. pack
D8001

It is a brightening water wax for the specific maintenance of varnished floors, particularly for Extraresistent and Smile collections.

SUNDECK OIL Outdoor wood maintenance

5 lt. bucket
FO000

Maintenance of Free Time outdoor wood deckings. It does not change the natural wood colour. Consumption: 13 sqm floor/ 1 lt.

Underlay

Base ALU Pro

Thickness 2 mm

Height 1000 mm - Length 15000 mm

Low density polyethylene with integrated metallized vapor barrier and overlap for fast assembly and good local unevenness compensation capability.

TA002

Extreme ALU Heat

Thickness 2 mm


Height 1000 mm - Length 8000 mm

Permanently elastic, heavy underlay with very high walkingnoise reduction value. Designed also for high floor heating efficiency. A metallized vapor barrier is integrated.


TA003

Accessories


Skirting *



Veneer
Thickness 10 mm
Height 50 mm
Square profile



Veneer
Thickness 10 mm
Height 70 mm




Veneer
Thickness 13 mm
Height 110 mm
Contoured profile

Colour


Laquered RAL 9010 (white)	71775	71776	72779
Laquered RAL 9016 (white)	71773	71778	
Vintage Natural Oak	71806	7J801	
Smile Natural Oak	7S806	71806	
Any other finishing**	●	●	

** 30% DISCOUNT FOR QUANTITIES EXCEEDING 200 LM

Square stair profiles



Height 40 mm
Width 75 mm
Length 1100 mm
Floor thickness 10 mm




Height 40 mm
Width 75 mm
Length 1100 mm
Floor thickness 15 mm


Colour

All colours	●	●
-------------	---	---

Thresholds *



Height 10 mm
Width 60 mm
Length 1100 mm



Height 15 mm
Width 60 mm
Length 1100 mm

Colour

All colours	●	●
-------------	---	---


Merchandising

Synoptic panels

These panels originate from a creative concept typifying a prestigious exposition set where art and design are main features of the layout. The innovative concept of the display panels is thought for dialogue with architects and designers in order to compare different stain and textures through small pieces of real wood.

The synoptic panels can be fixed on the wall or fitted into an existing exposition stand. The panels can be equipped with hinges in order to position them in "L" shape or create a central totem.

The single wood strips can be **easily removed** thanks to the innovative and practical hook.



Many solutions in only 1 m²

Synoptic panels

Dimension:
1000 x 2000 mm
available for:
Smile X Large 10 - **MSLS1**
Smile XX Large - **MSLSX**
Vintage A - **MS9V1**
Vintage B - **MS9V2**
Life - **MS9L0**
€/each 380,00



Smile X Large 10



Smile XX Large



Vintage A



Vintage B



Life



General sales conditions

1. Order

Commission taken by agents or officials are subject to acceptance by the Sales Direction. The acceptance of the order by the Producer may be explicit, but can also be made by delivering the goods to the forwarder in charge of transport to final destination.

2. Delivery terms

Delivery times are purely indicative

3. Dimensions and hardness, stability and laying characteristics of the elements

The dimensions of the elements, even if specified, are indicative. At the same time, indications about hardness and stability of the wood species as well as laying indications are to be intended as indicative.

4. Claims

The buyer must control the products regarding damages and/or obvious quality defects at the moment of delivery by the forwarder in charge of transport. Any complaints must be notified by registered letter with delivery receipt within eight days from receipt of the goods and, in any event, before laying begins. The use or transfer of the material by the Buyer are considered as a recognition that the material conforms to what was agreed, and as a waiver of any claim. If any faults are noted during laying, the Buyer shall immediately suspend laying and notify the Producer, subject to the Buyer forfeiting all his/her rights. The Producer's obligations shall not go beyond the collection and replacement of any material recognized to be faulty. The Customer shall be responsible for any damage to the material due to poor preservation or negligence. In this case, the Customer has all the obligations of a depositary. The Producer shall not accept any liability for damage to materials resulting from and following the laying of the said material.

5. Prices

If there are any increases in the cost of labour and raw materials, including hire, transport, custom duties and exchange rates, before the goods are delivered, the seller shall have the right to revise the price, subject to the Buyer's right to withdraw from the contract. By this withdrawing the Buyer thereby renounces any claim to reimbursement of damage or anything else from the Buyer. All prices are ex-works excluding VAT.

6. Payments

Payments are valid only if made directly to the Producer, according to the agreed method. If the Producer exceptionally authorizes a payment through Bill of exchange or Bank Draft, this way of payment is to be intended as a subsidiary and therefore the territorial competence of the Court of Law of Bologna is not changed. As per law nr. 231/2007, article nr. 49, all payments made by bank of poste cheque are to be entitled directly onto the Producer and need to bear the writing "not transferable".

7. Insolvency and interest

At the first non-payment or delayed payment of an installment agreed in the contract, the Buyer shall automatically lose the benefit of the term and the Producer may take alternative action, at its own discretion, either as concerns the entire remaining difference, or as concerns contemporaneous and immediate cancellation of the contract when one of the above mentioned events occurs. In the event of late payment, interest shall apply as provided for by Legislative D Decree Nr. 231 dated 09/10/2002.

8. Territorial competence

Any disputes arising from sales shall be referred for judgement exclusively to the Bologna Court of Law. The Producer may, however, decide to transfer the court of law to the place of the Buyer in case of controversy.

9. Warranty

The producer guarantees its products within the laws in act.

GAZZOTTI

Gazzotti 18 Società Cooperativa
Via Lame 282 - 40013 Trebbio di Reno (BO) - Italy
Phone 051 6329611 - vendite@gazzotti18.it
www.gazzotti18.it

