

wineo

THAT'S FLOORING

DESIGN FLOORING

**CONFIDENT IN STYLE.
LIVING AND WORKING.**

NEW!
Now with
wineo 600
rigid

THAT'S

FLOORING

CONTENTS

Confident in style	05
Product advantages	06
Application areas	08
Product composition	10
Product comparison	15
Surfaces	16

Collections

wineo 400	18
wineo 600	30
Rigid Special	44
wineo 800	46

PERFECT FIT Accessories	64
Service	66
Awards & Quality	68

Collection overview	70
Symbols	73

wineo 600

CONFIDENT IN STYLE. LEAD THE WAY.

Make your way through world-renowned metropolises, exclusive squares and trendy districts. Choose from 18 wood designs and 6 stone looks that fit perfectly into private homes and smaller commercial buildings. **The highlight is the new click version wineo 600 rigid, which allows you to realise any new look you want easily and quickly.**





CONFIDENT IN STYLE.



Where do we find inspiration? Where can we feel the spirit of the times? Our designers were looking for the latest trends – with the aim of creating extraordinary collections that are characterised in particular: by confidence in style.

The design flooring by wineo gives every room a special flair. It derives its inspiration from the warmth of nature or the cool concrete facades of fascinating cities. It convinces with its design and functionality for residential and commercial buildings.



PRODUCT ADVANTAGES

The permanently elastic wineo design flooring is impressively functional. Offering numerous product advantages and ease of use, it is a true favourite.

**DURABLE**

wineo design flooring is **non-staining**.
Even furniture and chair castors leave no trace.

**SUITABLE FOR UNDERFLOOR HEATING**

Installed on underfloor heating, the design flooring
conveys an extra sense of **cosy warmth**.

**EASY CARE**

Thanks to the sealed finish, the design flooring
is very **easy to clean**.

**SUITABLE FOR DAMP AREAS**

All wineo design flooring for gluing or clicking in
are perfectly suitable **for damp rooms**, such as
the kitchen or bathroom.

**QUIET**

The soft surface ensures **pleasant
room acoustics**.

**GENTLE ON THE ANKLES**

Thanks to the **elastic surface**, the joints
are protected.

**WARM TO THE FEET**

The design flooring feels **pleasantly warm** and
is ideally suitable for lying, playing and living on.

**SLIP-RESISTANT**


The **tested surface** is reliably safe with
every step.

APPLICATION AREAS

The wineo design flooring for gluing and clicking in, with utilisation classes between 23 and 42, is always the right choice – for domestic areas as much as for public buildings or the light industrial sector. Product thicknesses of 2 mm to 9 mm make it possible to install the design floor on virtually any technically adequate subsurface.

i

All wineo Design Floors are suitable for wet areas.

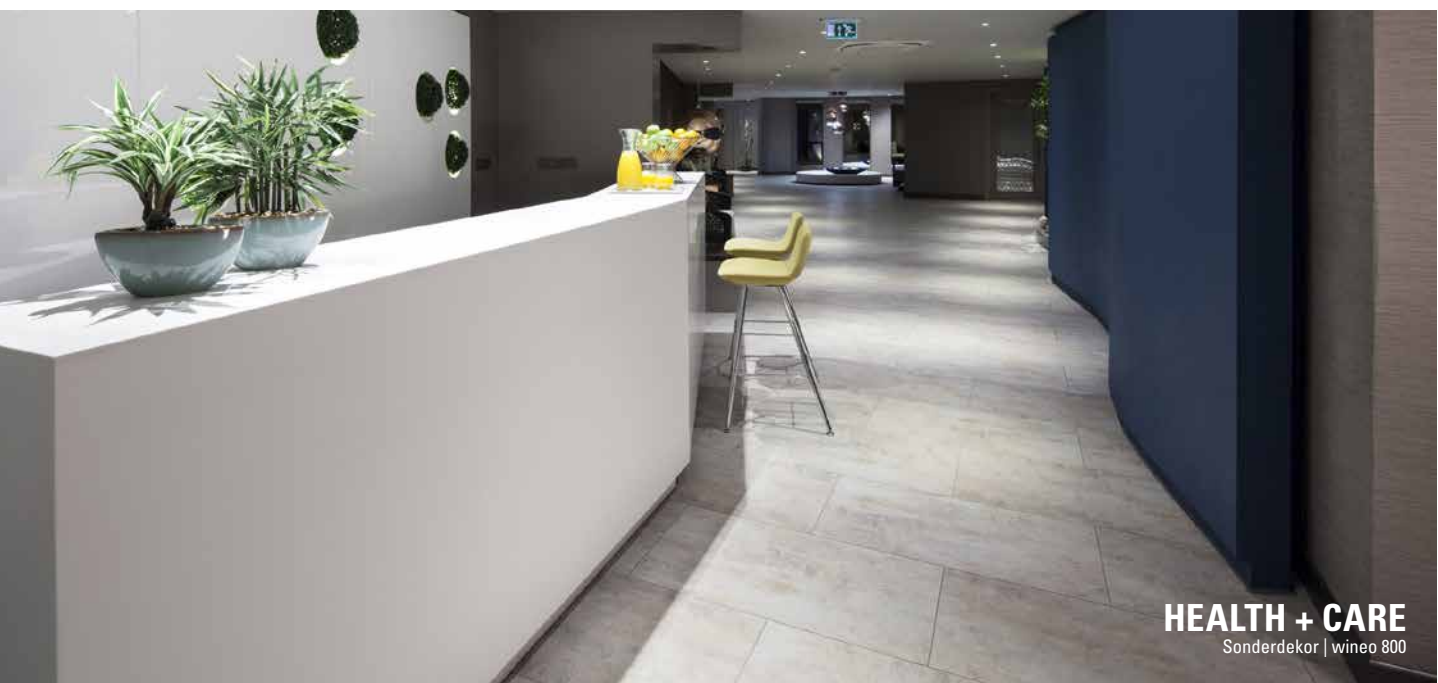



HOTEL + HOSPITALITY

Art Concrete | wineo 800 stone XL
Solid Sand | wineo 800 tile



RETAIL + FAIR

#BrooklynFactory | wineo 800 stone



PUBLIC + EDUCATION

Solid Grey | wineo 800 tile
Solid Taupe | wineo 800 tile
Solid Light | wineo 800 tile




PRODUCT COMPOSITION

Design flooring from wineo is just as varied as your requirements. Whether you are looking for flooring for a new building, renovation, at home or for commercial use – wineo has the right product for you.

ELASTIC DESIGN FLOORING FOR GLUING



- minimal thickness of 2 mm to 2.5 mm
- particularly durable and long-lasting
- ideal for refurbishment work and damp areas

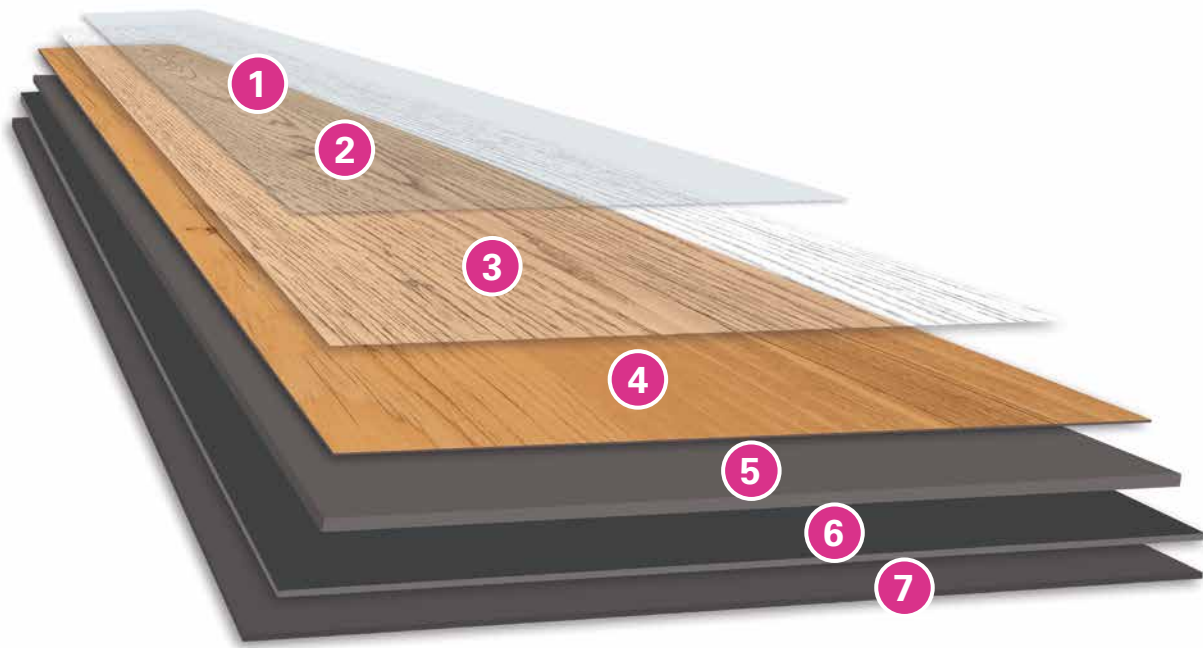

1 Surface seal

Protects the product and enables easy cleaning and maintenance.

2 Surface texture

A range of surface textures ensure an authentic feel and appearance.

3 Wear layer

Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

4 Design

The decor film offers a host of design options.

5 Base layer

Lends the product a high level of dimensional stability and optimum point-load resistance.

6 Backing

With its waffle back texture, it is used to help ensure balance and optimal installation.


7 Underlay material

Available separately: The silentPREMIUM and silentPLUS underlay mat for bridging any unevenness and reducing walking and impact noise levels (p. 64). For using these we grant +5 years on all standard guarantees.

ELASTIC DESIGN FLOORING FOR CLICKING IN



- very elastic
- available in a thickness of 4.5 mm to 5 mm
- connect locking for a particularly quick and tidy installation
- durable and long-lasting

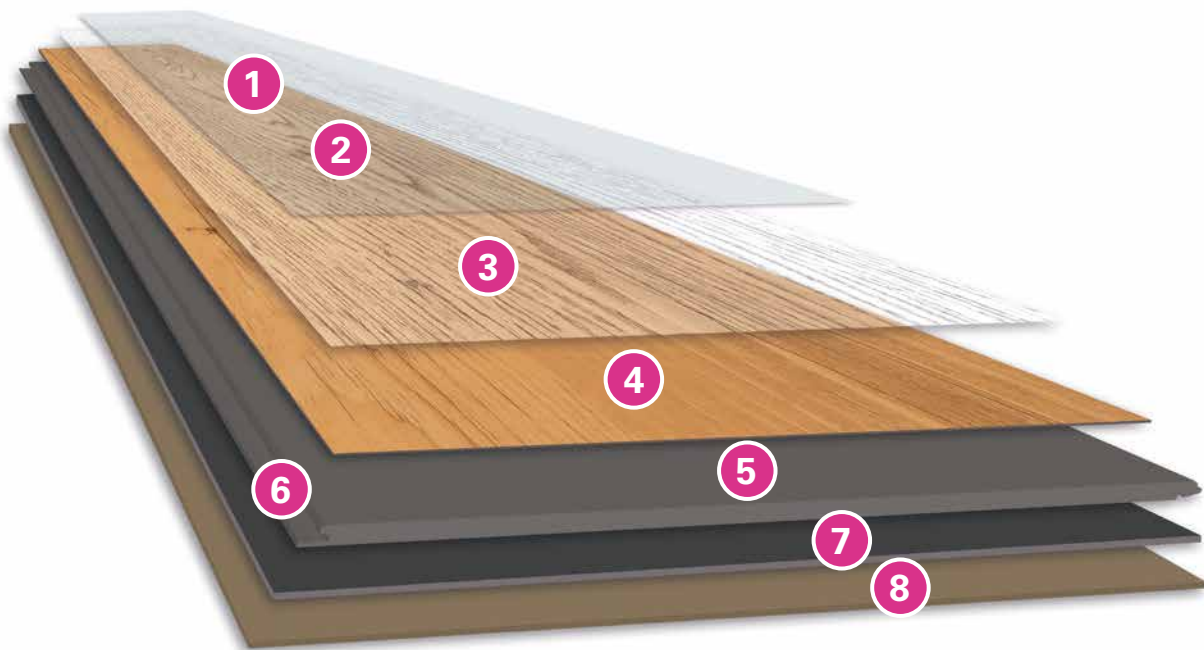


- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface texture ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer with glass fibre reinforcement**
Lends the product an especially high level of dimensional stability and optimum point-load resistance.
- 6 Profile connection**
The Connect locking system was especially developed for elastic design flooring and enables planks to be clicked into each other without any problems.
- 7 Backing**
With its waffle back texture, it is used to help ensure balance and optimal installation.
- 8 Underlay material**
Available separately: The silentCOMFORT underlay mat with non-slip effect for bridging any unevenness and reducing walking noise levels (p. 64). For using these we grant +5 years on all standard guarantees.

MULTI-LAYER | SEMI-RIGID DESIGN FLOORING FOR CLICKING IN



- design flooring surface on Aqua-Protect® HDF core board
- 9 mm thick for optimally bridging any unevenness in the substrate
- ideal for refurbishment work and damp areas
- particularly heat-resistant and dimensionally stable
- integrated soundPROTECT insulation mat for reducing walking and impact sound levels
- LocTec® locking for easy installation

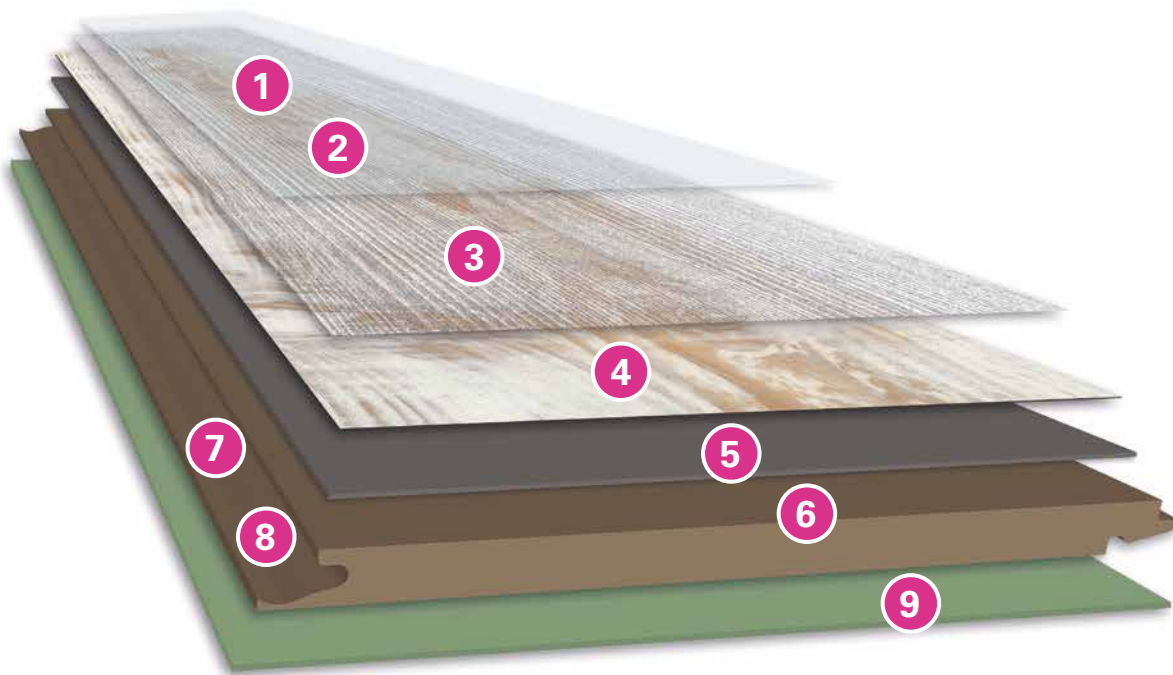

1 Surface seal

Protects the product and enables easy cleaning and maintenance.

2 Surface texture

A range of surface textures ensure an authentic feel and appearance.

3 Wear layer

Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

4 Design

The decor film offers a host of design options.

5 Base layer

Lends the product a high level of dimensional stability and optimum point-load resistance.

6 Core board

The HDF Aqua-Protect® core board is swell-resistant.

7 Profile connection

Thanks to the tried-and-tested LocTec® locking system, panels can be clicked into one another without any problems.

8 Profile seal

A special profile seal protects the entire connection system from moisture.


9 Underlay material

The walking and impact sound-reducing system soundPROTECT is already securely integrated into wineo Multi-Layer flooring.

SEMI-RIGID DESIGN FLOORING FOR CLICKING IN



- very solid product composition with Tele-Stop-function
- semi-rigid: construction of a sturdy product core with elastic layers
- very strong click connection
- with underlay mat silentRIGID more longer-lasting

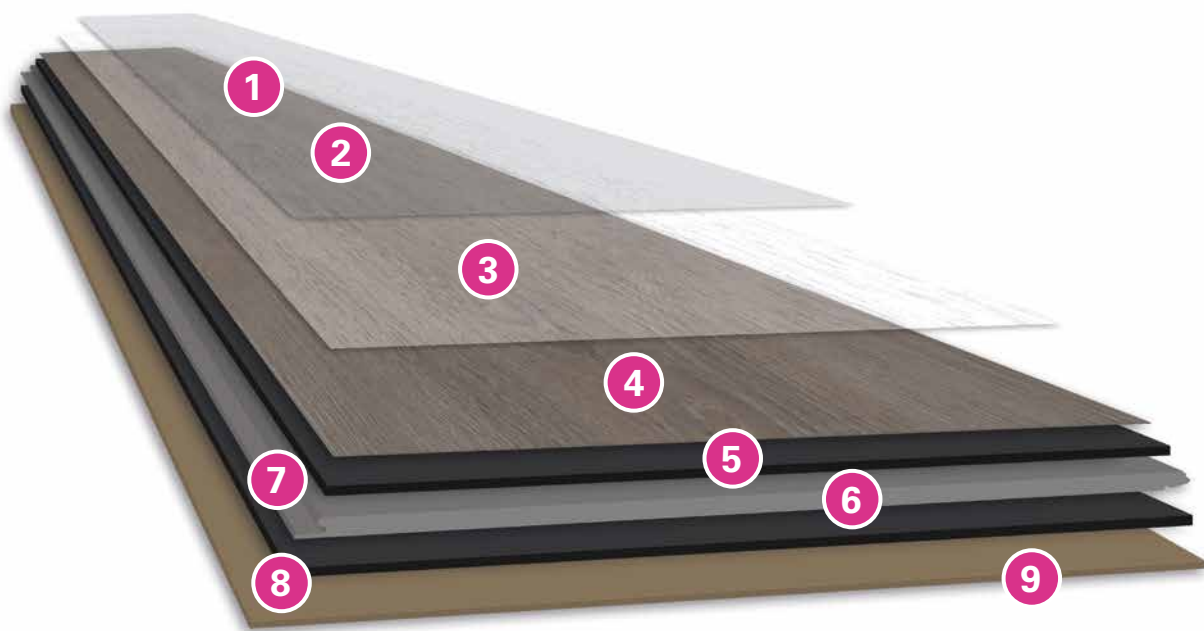

- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A range of surface textures ensure an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Elastic top layer**
Enables the product to remain flexible and free to move – despite the rigid core board.
- 6 Core board**
Extremely stably constructed product core with Tele-Stop-function, which prevents marking of the subfloor from tracing through.
- 7 Profile connection**
The Connect locking system was specially developed for design flooring and enables planks to be clicked into each other without any problems.
- 8 Elastic bottom layer**
This enables the product to remain flexible and free to move – despite the rigid core board.
- 9 Underlay material**
Available separately: The silentRIGID underlay mat stabilises the click-lock system and is also absorbing noise (p. 64). For using these we grant +5 years on all standard guarantees.

PRODUCT COMPARISON

wineo	400 600 800	400 800	400 Multi-Layer	600 Rigid	Conventional rigid floor (SPC) < 5 mm
Features	Elastic design flooring  for gluing	Elastic design flooring  for clicking in	Semi-rigid design flooring  for clicking in	Semi-rigid design flooring  for clicking in	Rigid design flooring  for clicking in
Watertightness	★ ★ ★	★ ★ ★	★ ★	★ ★ ★	★ ★ ★
Noise reduction	★ ★ ★	★ ★ ★	★ ★	★ ★	★
Walking comfort	★ ★ ★	★ ★ ★	★ ★	★ ★	★
Dimension stability	★ ★	★ ★	★ ★ ★	★ ★ ★	★ ★ ★
Locking stability	-	★	★ ★	★ ★	★ ★ ★
Tele-Stop-Function	★	★	★ ★ ★	★ ★ ★	★ ★ ★
Castor chair test type W 25,000 turns	passed	wineo 400 10,000 turns wineo 800 25,000 turns	passed	passed (with and without silentRIGID)	passed (only with silentRIGID)
Max. installation surface without a joint	-	150 m ²	150 m ²	400 m ²	-
Fitting underlay mat	silentPREMIUM silentPLUS	silentCOMFORT	soundPROTECT (integrated)	silentRIGID	silentRIGID

★ standard
 ★ ★ good
 ★ ★ ★ especially good

SURFACES

wineo design flooring comes in different surfaces, which are designed to suit the decors. Wood structures, for example, ensure that your floor feels particularly authentic. Please refer to the labelling under the design pictures.



Fine wooden pore



Rough wood structure



Exclusive wood structure



Sand structure



Rough sawn surface



Stone structure



Slate structure



Travertine



Registered embossed surface



Designs with a registered embossed surface look especially authentic, as the surface structure is in sync with the wood grain. The expression of knots and lines in the wood gives the floor its unique originality.



Brushed structure



Handscraped I



Glossy surface



**3-in-1**

wineo 400

CONFIDENT IN STYLE. FEELING AT HOME.

The wineo 400 is a true all-rounder for your home: every design is available for gluing, clicking in or as a Multi-Layer variant for clicking in – for maximum creative freedom. Discover 18 wood and 10 stone designs as well as 12 wood designs in XL with a high-quality registered embossed surface.

The collection is the stylistically assured entry-level variant in the field of design flooring and is ideal for private use.

wineo 400 wood | wood XL

Installation type: Glue
Product thickness: 2 mm | 2 mm
Wear layer: 0,3 mm | 0,3 mm
Planks / box: 18/3,89 m² | 12/4,24 m²



1200 × 180 mm

Installation type: Click
Product thickness: 4,5 mm | 4,5 mm
Wear layer: 0,3 mm | 0,3 mm
Planks / box: 10/2,27 m² | 6/2,12 m²



1212 × 187 mm

Installation type: Click (Multi-Layer)*
Core board: Aqua-Protect®
Product thickness: 9 mm | 9 mm
Wear layer: 0,3 mm | 0,3 mm
Planks / box: 9/2,00 m² | 6/2,10 m²



Multi-Layer

1222 × 182 mm

Multi-Layer

XL
1520 × 230 mm

i

wood XL with registered
embossed surface

wineo 400 stone

Installation type: Glue
Product thickness: 2 mm
Wear layer: 0,3 mm
Planks / box: 18/3,34 m²



609,6 × 304,8 mm

Installation type: Click
Product thickness: 4,5 mm
Wear layer: 0,3 mm
Planks / box: 12/2,28 m²



600 × 316 mm

Installation type: Click (Multi-Layer)*
Core board: Aqua-Protect®
Product thickness: 9 mm
Wear layer: 0,3 mm
Planks / box: 9/1,68 m²



Multi-Layer

601 × 310 mm





wineo 400 wood



Dream Pine Light

1 strip | Rough wood structure

Glue: DB00105

Click: DLC00105

Click (Multi-Layer): MLD00105



Moonlight Pine Pale

1 strip | Rough wood structure

Glue: DB00104

Click: DLC00104

Click (Multi-Layer): MLD00104



Desire Oak Light

1 strip | Rough wood structure

Glue: DB00108

Click: DLC00108

Click (Multi-Layer): MLD00108



Grace Oak Smooth

1 strip | Rough wood structure

Glue: DB00106

Click: DLC00106

Click (Multi-Layer): MLD00106



Embrace Oak Grey

1 strip | Rough wood structure

Glue: DB00110

Click: DLC00110

Click (Multi-Layer): MLD00110



Spirit Oak Silver

1 strip | Rough wood structure

Glue: DB00115

Click: DLC00115

Click (Multi-Layer): MLD00115



Starlight Oak Soft

1 strip | Rough wood structure

Glue: DB00116

Click: DLC00116

Click (Multi-Layer): MLD00116



Miracle Oak Dry

1 strip | Rough wood structure

Glue: DB00117

Click: DLC00117

Click (Multi-Layer): MLD00117



Inspiration Oak Clear
1 strip | Rough wood structure

Glue: DB00113
Click: DLC00113
Click (Multi-Layer): MLD00113



Compassion Oak Tender
1 strip | Rough wood structure

Glue: DB00109
Click: DLC00109
Click (Multi-Layer): MLD00109



Paradise Oak Essential
1 strip | Rough wood structure

Glue: DB00112
Click: DLC00112
Click (Multi-Layer): MLD00112



Energy Oak Warm
1 strip | Rough wood structure

Glue: DB00114
Click: DLC00114
Click (Multi-Layer): MLD00114



Adventure Oak Rustic
1 strip | Rough wood structure

Glue: DB00111
Click: DLC00111
Click (Multi-Layer): MLD00111



Summer Oak Golden
1 strip | Rough wood structure

Glue: DB00118
Click: DLC00118
Click (Multi-Layer): MLD00118



Soul Apple Mellow
1 strip | Rough wood structure

Glue: DB00107
Click: DLC00107
Click (Multi-Layer): MLD00107



Romance Oak Brilliant
1 strip | Rough wood structure

Glue: DB00119
Click: DLC00119
Click (Multi-Layer): MLD00119

wineo 400 wood



Eternity = various plank colours
in one box



Eternity Oak Grey

1 strip | Rough wood structure

Glue: DB00121

Click: DLC00121

Click (Multi-Layer): MLD00121



Eternity Oak Brown

1 strip | Rough wood structure

Glue: DB00120

Click: DLC00120

Click (Multi-Layer): MLD00120



wineo 400 wood XL

REGISTERED
EMBOSSSED
SURFACE



Emotion Oak Rustic

1 strip | **Registered embossed surface**

Glue: DB00123

Click: DLC00123

Click (Multi-Layer): MLD00123



Ambition Oak Calm

1 strip | **Registered embossed surface**

Glue: DB00122

Click: DLC00122

Click (Multi-Layer): MLD00122



Wish Oak Smooth

1 strip | **Registered embossed surface**

Glue: DB00131

Click: DLC00131

Click (Multi-Layer): MLD00131



Memory Oak Silver

1 strip | **Registered embossed surface**

Glue: DB00132

Click: DLC00132

Click (Multi-Layer): MLD00132



Valour Oak Smokey

1 strip | **Registered embossed surface**

Glue: DB00133

Click: DLC00133

Click (Multi-Layer): MLD00133



Silence Oak Beige

Glue: DB00124

1 strip | **Registered embossed surface**

Click: DLC00124

Click (Multi-Layer): MLD00124



Luck Oak Sandy

Glue: DB00127

1 strip | **Registered embossed surface**

Click: DLC00127

Click (Multi-Layer): MLD00127



Kindness Oak Pure

Glue: DB00125

1 strip | **Registered embossed surface**

Click: DLC00125

Click (Multi-Layer): MLD00125



Liberation Oak Timeless

Glue: DB00128

1 strip | **Registered embossed surface**

Click: DLC00128

Click (Multi-Layer): MLD00128



Joy Oak Tender

Glue: DB00126

1 strip | **Registered embossed surface**

Click: DLC00126

Click (Multi-Layer): MLD00126



Comfort Oak Mellow

Glue: DB00129

1 strip | **Registered embossed surface**

Click: DLC00129

Click (Multi-Layer): MLD00129



Intuition Oak Brown

Glue: DB00130

1 strip | **Registered embossed surface**

Click: DLC00130

Click (Multi-Layer): MLD00130

wineo 400 stone



Harmony Stone Sandy

Sand structure

Glue: DB00134

Click: DLC00134 (real joint)

Click (Multi-Layer): MLD00134



Magic Stone Cloudy

Travertin

Glue: DB00136

Click: DLC00136 (real joint)

Click (Multi-Layer): MLD00136



Patience Concrete Pure

Travertin

Glue: DB00139

Click: DLC00139 (real joint)

Click (Multi-Layer): MLD00139



Wisdom Concrete Dusky

Sand structure

Glue: DB00140

Click: DLC00140 (real joint)

Click (Multi-Layer): MLD00140



Vision Concrete Chill

Sand structure

Glue: DB00135

Click: DLC00135 (real joint)

Click (Multi-Layer): MLD00135



Courage Stone Grey

Sand structure

Glue: DB00137

Click: DLC00137 (real joint)

Click (Multi-Layer): MLD00137



Fairytale Stone Pale

Sand structure

Glue: DB00142

Click: DLC00142 (real joint)

Click (Multi-Layer): MLD00142



Fortune Stone Rusty

Travertin

Glue: DB00143

Click: DLC00143 (real joint)

Click (Multi-Layer): MLD00143



Glamour Concrete Modern

Sand structure

Glue: DB00141

Click: DLC00141 (real joint)

Click (Multi-Layer): MLD00141



Hero Stone Gloomy

Sand structure

Glue: DB00138

Click: DLC00138 (real joint)

Click (Multi-Layer): MLD00138



wineo 600

CONFIDENT IN STYLE. LEAD THE WAY.

Standing out in style while staying low on the ground.

The XL formats and trendy designs of wineo 600 are inspiring.

New York, London or Sydney – plenty of elegant styles for living and working with flair. And, with the click version wineo 600 rigid, every new look can be realised in no time at all.

Choose from 18 wood designs and 6 stone looks for gluing and clicking in – both versions are quick and easy to install. With a wear layer of 0.4 mm, the wineo 600 is perfect for both private homes and smaller commercial buildings.



wineo 600 wood | wood XL

Installation type: Glue
Product thickness: 2 mm
Wear layer: 0,4 mm
Planks / box: 18/3,89 m² | 12/4,24 m²



1200 × 180 mm

Installation type: Click
Product thickness: 5 mm
Wear layer: 0,4 mm
Planks / box: 8/1,80 m² | 6/2,12 m²



Rigid

1212 × 186 mm

Rigid

XL
1507 × 234 mm

wineo 600 stone XL

Installation type: Glue
Product thickness: 2 mm
Wear layer: 0,4 mm
Tiles / box: 12/5,01 m²



XL

914 × 457 mm


Installation type: Click
Product thickness: 5 mm
Wear layer: 0,4 mm
Tiles / box: 6/2,14 m²



Rigid

XL

748 × 477 mm





wineo 600 wood

#Place



#NaturalPlace

1 strip | Exclusive wood structure

Glue: DB183W6

Click: RLC183W6



#WarmPlace

1 strip | Exclusive wood structure

Glue: DB184W6

Click: RLC184W6



#SmoothPlace

1 strip | Exclusive wood structure

Glue: DB185W6

Click: RLC185W6



#CozyPlace

1 strip | Exclusive wood structure

Glue: DB186W6

Click: RLC186W6



#ElegantPlace

1 strip | Exclusive wood structure

Glue: DB187W6

Click: RLC187W6



#ModernPlace

1 strip | Exclusive wood structure

Glue: DB188W6

Click: RLC188W6




#WarmPlace

wineo 600 wood | DB184W6

wineo 600 wood | RLC184W6

wineo 600 wood XL

#Loft

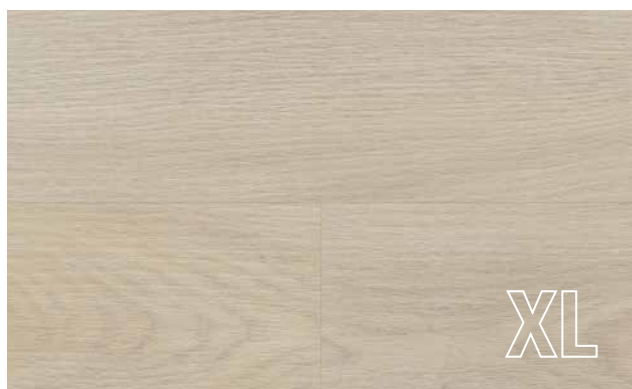

#CopenhagenLoft

1 strip | **Registered embossed surface**

Glue: DB189W6

Click: RLC189W6



#MilanoLoft

1 strip | **Registered embossed surface**

Glue: DB190W6

Click: RLC190W6



#BarcelonaLoft

1 strip | **Registered embossed surface**

Glue: DB191W6

Click: RLC191W6



#LisbonLoft

1 strip | **Registered embossed surface**

Glue: DB192W6

Click: RLC192W6



#LondonLoft

1 strip | **Registered embossed surface**

Glue: DB193W6

Click: RLC193W6



#SydneyLoft

1 strip | **Registered embossed surface**

Glue: DB194W6

Click: RLC194W6



wineo 600 wood XL

#Loft



#AmsterdamLoft

1 strip | **Registered embossed surface**

Glue: DB195W6

Click: RLC195W6



#ViennaLoft

1 strip | **Registered embossed surface**

Glue: DB196W6

Click: RLC196W6



#NewYorkLoft

1 strip | **Registered embossed surface**

Glue: DB197W6

Click: RLC197W6



#MoscowLoft

1 strip | **Registered embossed surface**

Glue: DB198W6

Click: RLC198W6



#ParisLoft

1 strip | **Registered embossed surface**

Glue: DB199W6

Click: RLC199W6



#BerlinLoft

1 strip | **Registered embossed surface**

Glue: DB200W6

Click: RLC200W6



wineo 600 stone XL

#Factory



#SoHoFactory
Sand structure

Glue: DB205W6
Click: RLC205W6 (real joint)



#BrooklynFactory
Sand structure

Glue: DB206W6
Click: RLC206W6 (real joint)



wineo 600 stone XL

#Factory



#NoordFactory
Sand structure

Glue: DB201W6
Click: RLC201W6 (real joint)



#CamdenFactory
Sand structure

Glue: DB202W6
Click: RLC202W6 (real joint)



#ChelseaFactory
Sand structure

Glue: DB203W6
Click: RLC203W6 (real joint)



#NewtownFactory
Sand structure

Glue: DB204W6
Click: RLC204W6 (real joint)





ONE CLICK BETTER!

On-trend looks can now be realised even more quickly, because you can renovate “one click better” with wineo 600 rigid. Find out all you need to know about rigid design flooring and the smart rigid version from wineo now.



wineo
THAT'S FLOORING

wineo 600 rigid
DESIGN FLOORING

**ONE CLICK
BETTER!**

SPECIAL

If you no longer have your Rigid Special,
email info@wineo.de to order your new copy
with the product number 20060086.

Anna, Stylist

»As a stylist, I am on my feet all day long. So I appreciate every single minute of being on an elastic design flooring, which is gentle on the joints.«




wineo 800

CONFIDENT IN STYLE. MAKING AN IMPACT.


Developed with the help of trend scouts, wineo 800 provides plenty of impressive new inspiration. The collection offers 42 innovative designs for gluing or clicking in, in a total of 8 different formats. With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.

COMBINATIONS

wineo 800, in particular, offers plenty of opportunities for creatively combining various decors and formats for gluing. This means that any floor can be transformed, making it truly distinctive and unique.



tile L



tile L | tile XL



tile L | tile XXL | craft



craft




tile L | tile XL | tile XXL



tile L | tile XL



tile L | tile XXL

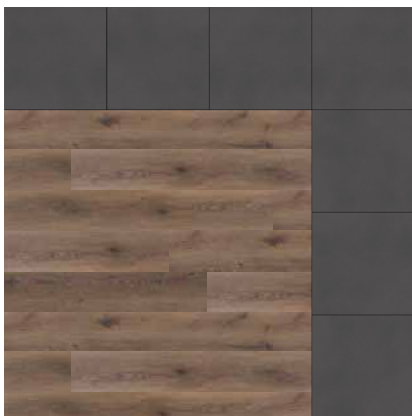

wood | tile



wood | craft



tile L | craft



tile XL



tile XL



craft



craft



wood | craft

wineo 800 wood | wood XL

Installation type: Glue

Product thickness: 2,5 mm | 2,5 mm

Wear layer: 0,55 mm | 0,55 mm

Planks / box: 16/3,46 m² | 12/4,24 m²

Installation type: Click

Product thickness: 5 mm | 5 mm

Wear layer: 0,55 mm | 0,55 mm

Planks / box: 8/1,79 m² | 6/2,14 m²



1200 × 180 mm



1212 × 185 mm



1505 × 235 mm



1505 × 237 mm

i

wood XL with registered
embossed surfaced surface

wineo 800

wood



Glue

1200 × 180 mm



Click

1212 × 185 mm

wood XL



Glue

1505 × 235 mm



Click

1505 × 237 mm

stone XL



Glue

914,4 × 457,2 mm



Click

914 × 480 mm

tile



Glue

L

457,2 ×
457,2 mm



Glue

XL

914,4 × 457,2 mm



Glue

XXL

914,4 × 914,4 mm

craft




Glue

457,2 ×
457,2 mm



Glue

914,4 × 101,6 mm



Mona, Gallery Owner

»For my exhibitions, it is important that the flooring provides a stage for the works of art so that their full effect can be appreciated. In the background, high-quality and hard-wearing. That's precisely what flooring should be.«



SCANDINAVIAN LIGHT WOOD



Copenhagen Frosted Pine
1 strip | Handscraped |

Glue: DB00076
Click: DLC00076



Gothenburg Calm Oak
1 strip | Exclusive wood structure

Glue: DB00077
Click: DLC00077



Riga Vibrant Pine
1 strip | Exclusive wood structure

Glue: DB00082
Click: DLC00082



Helsinki Rustic Oak
1 strip | **Registered embossed surface**

Glue: DB00068
Click: DLC00068



Lund Dusty Oak
1 strip | **Registered embossed surface**

Glue: DB00065
Click: DLC00065

NATURAL WARM WOOD

wineo 800 53



Salt Lake Oak
1 strip | Exclusive wood structure

Glue: DB00079
Click: DLC00079



Wheat Golden Oak
1 strip | Exclusive wood structure

Glue: DB00080
Click: DLC00080



Honey Warm Maple
1 strip | Exclusive wood structure

Glue: DB00081
Click: DLC00081



Clay Calm Oak
1 strip | **Registered embossed surface**

Glue: DB00062
Click: DLC00062



Corn Rustic Oak
1 strip | **Registered embossed surface**

Glue: DB00064
Click: DLC00064



Mud Rustic Oak
1 strip | **Registered embossed surface**

Glue: DB00063
Click: DLC00063



Joanne, Fashion Designer

»In my boutique, my customer's individuality is everything. The design of the shop should support the individual style of my clients.«

MEDITERRANEAN DARK WOOD

wineo 800 55



Balearic Wild Oak

1 strip | Exclusive wood structure

Glue: DB00078

Click: DLC00078



Crete Vibrant Oak

1 strip | Exclusive wood structure

Glue: DB00075

Click: DLC00075



Sardinia Wild Walnut

1 strip | Exclusive wood structure

Glue: DB00083

Click: DLC00083



Cyprus Dark Oak

1 strip | **Registered embossed surface**

Glue: DB00066

Click: DLC00066



Santorini Deep Oak

1 strip | **Registered embossed surface**

Glue: DB00061

Click: DLC00061



Ponza Smoky Oak

1 strip | **Registered embossed surface**

Glue: DB00067

Click: DLC00067



Sicily Dark Oak

1 strip | **Registered embossed surface**

Glue: DB00069

Click: DLC00069

wineo 800 stone XL

Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 10/4,18 m²



Installation type: Click
Product thickness: 5 mm
Wear layer: 0,55 mm
Tiles / box: 6/2,63 m²



wineo 800 tile L | tile XL | tile XXL


Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 16/3,34 m²



Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 10/4,18 m²



Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 6/5,02 m²




wineo 800 craft

Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Tiles / box: 16/3,34 m²



Installation type: Glue
Product thickness: 2,5 mm
Wear layer: 0,55 mm
Planks / box: 20/1,86 m²



Lucas, Hotel Manager

»There's always a lot going on in our lobby. The design flooring successfully creates a peaceful atmosphere, both acoustically and visually.«



URBAN STONE DESIGN



Raw Concrete
1 strip | Sand structure

Glue: DB00088
Click: DLC00088



Rough Concrete
1 strip | Sand structure

Glue: DB00089
Click: DLC00089



Calm Concrete
1 strip | Sand structure

Glue: DB00094
Click: DLC00094



Heavy Metal
1 strip | Glossy surface

Glue: DB00084
Click: DLC00084 (real joint)



Dark Slate
1 strip | Slate structure
Glue: DB00085
Click: DLC00085 (real joint)



Silver Slate
1 strip | Slate structure
Glue: DB00087
Click: DLC00087 (real joint)



Copper Slate
1 strip | Stone structure
Glue: DB00091
Click: DLC00091 (real joint)



Light Sand
1 strip | Stone structure
Glue: DB00095
Click: DLC00095 (real joint)



Art Concrete
1 strip | Sand structure
Glue: DB00086
Click: DLC00086 (real joint)



White Marble
1 strip | Sand structure
Glue: DB00090
Click: DLC00090

John, Architect


»Today's requirements are high. Flooring is a design element, which has to fulfill two major requirements: functionality and design – both to a very high quality.«






Solid Dark
Sand structure

Glue: DB00096-1 (XXL)
Glue: DB00096-2 (XL)
Glue: DB00096-3 (L)

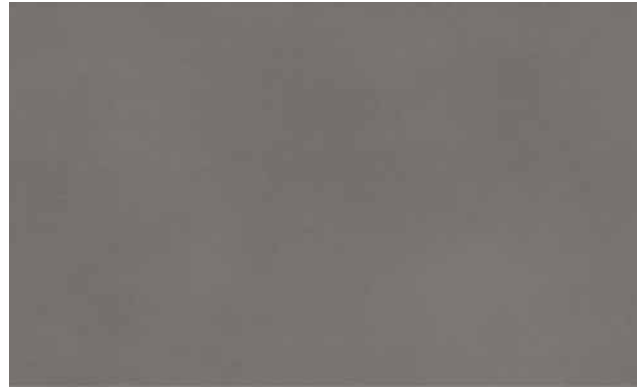

Solid Grey
Sand structure

Glue: DB00097-1 (XXL)
Glue: DB00097-2 (XL)
Glue: DB00097-3 (L)

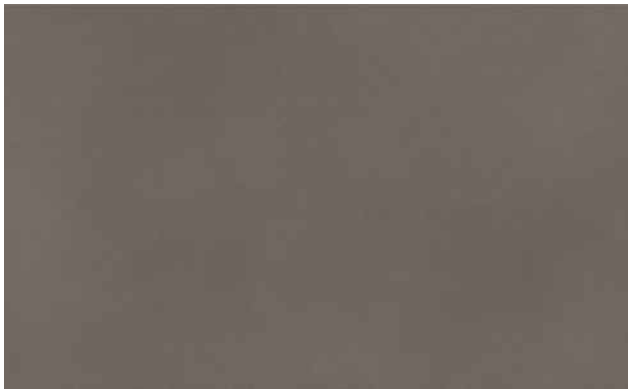

Solid Taupe
Sand structure

Glue: DB00099-1 (XXL)
Glue: DB00099-2 (XL)
Glue: DB00099-3 (L)



Solid Umbra
Sand structure

Glue: DB00098-1 (XXL)
Glue: DB00098-2 (XL)
Glue: DB00098-3 (L)



Solid Sand
Sand structure

Glue: DB00100-1 (XXL)
Glue: DB00100-2 (XL)
Glue: DB00100-3 (L)



Solid Light
Sand structure

Glue: DB00101-1 (XXL)
Glue: DB00101-2 (XL)
Glue: DB00101-3 (L)



Solid White
Sand structure

Glue: DB00102-1 (XXL)
Glue: DB00102-2 (XL)
Glue: DB00102-3 (L)



Solid Black
Sand structure

Glue: DB00103-1 (XXL)
Glue: DB00103-2 (XL)
Glue: DB00103-3 (L)

URBAN CRAFT DESIGN



Mosaic Dark
1 strip | Sand structure

Glue: DB00093



Mosaic Light
1 strip | Sand structure

Glue: DB00092



Infinity Dark Solid
1 strip | Exclusive wood structure

Glue: DB00073



Infinity Light Solid
1 strip | Exclusive wood structure

Glue: DB00074



Infinity Dark Mixed*
1 strip | Exclusive wood structure
* Mixed = various plank colours in one box

Glue: DB00071



Infinity Light Mixed*
1 strip | Exclusive wood structure

Glue: DB00072

Carla, Shop Designer

»The flooring is the stage for providing maximum effect. When selected carefully, it is one of the most important design elements in the room.«



PERFECT FIT ACCESSORIES

UNDERLAY MATERIAL

We recommend using our silentPREMIUM, silentPLUS, silentCOMFORT or silentRIGID underlay material with wineo design flooring. The basis is *ecuran*, a high-performance composite material which is predominantly made from vegetable oils such as canola or castor oil and naturally occurring mineral components such as chalk.

- **fast, energy-efficient distribution of ground heat**
- **excellent noise reduction with hard and soft floor coverings**
- **long-life performance of at least 30 years**
- **recovery almost 100%**
- **sustainable raw materials**
- **without chlorine, plasticisers or solvents**

silentPREMIUM

The premium class for the floating installation of elastic floor coverings for gluing



Self-adhesive top surface, floating installation, ultra-fast
Impact sound reduction: Up to 15 dB in the system with wineo design flooring for gluing. The application is possible up to utilisation classes 23 and 32.
Art. no. UPU1010

silentPLUS

Extra quietness for full-surface bonding of elastic floor coverings for gluing



Full-surface bonding above, self-adhesive below, ultra-quiet
Impact sound reduction: Up to 17 dB in the system with wineo design flooring for gluing.

Art. no. UPU1020

silentCOMFORT

The convenient mat for sturdy clicking installation of elastic floor coverings



Adhesive top surface, floating installation, ultra-sturdy
Impact sound reduction: Up to 16 dB in the system with wineo design flooring for clicking in.

Art. no. UCT1000

silentRIGID

The must-have for rigid floors for clicking in



No break of the click connection, super stabilising, installed as a floating floor
Impact sound reduction: Up to 13 dB in the system with wineo rigid design flooring for clicking in.

Art. no. UPU1030



Detailed information can be found in our accessories brochure:

Product no. 20091021

Download now:



Made with



www.blauer-engel.de/uz156



If a wineo PERFECT FIT PU underlay (soundPROTECT, soundSTOP, silentCOMFORT, silentPREMIUM, silentPLUS or silentRIGID) is used in combination with a suitable wineo flooring product, the wineo guarantee will be extended by 5 years.

FEATURE STRIPS

When installed between the panels, the feature strips create outstanding effects from an authentic plank or tile look to optically extending the length of the room. Whether in discrete colours or sharp contrast, the feature strips can be glued with all elastic wineo flooring.

Uni-Design	2 mm	2.5 mm	
Anthracite	AAN20DL	AAN25DL	
Cream	ACR20DL	ACR25DL	
Dark brown	ADB20DL	ADB25DL	
Black	ASW20DL	ASW25DL	
Silver grey	ASG20DL	ASG25DL	




STAIR NOSING

For all wineo 400 decors stair nosings are available:



TYP A

Single-curved edge, without click connection in the front

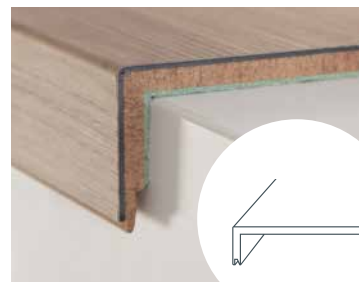


TYP B

Single-curved edge with additional click connection in the front for installing a block stage



TYP C

Double-curved edge, for wineo 400 Connect

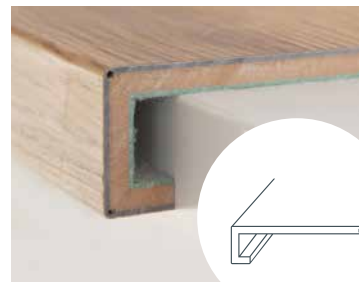

TYP C

Double-curved edge, for wineo 400 Multi-Layer

SKIRTINGS

- decor matching MDF skirtings for all wineo floor
- universally usable skirtings MDF as well as plastic/aluminium
- installation heights from 60mm to 100mm
- plastic mounting clips included in the range of accessories; alternatively glue or tack
- self-adhesive corner elements for easy installation



PROFILES

- Comfort Profiles (self-adhesive profiles) for do-it-yourselfer
- Premium Profiles (screwable profiles) for professionals
- profile types for different applications: transition-, adjustment and end profiles, L-end profiles, expansion joint profile, angle profiles and stair nosing profiles

SERVICE

We are partners for trade, architects, property developers and everyone who appreciates good flooring. As a result, we offer an extensive range of services. And, to stay fully up to date, you can just visit us on YouTube, Facebook, Twitter or Pinterest.



TECHNICAL SUPPORT

Do you have any questions about our products, their areas-of application or their installation?

Our capable technical-team is happy to help you:

Tel.: +49 (0) 52 37 609 – 530



MARKETING SUPPORT

We support you with a **wide range of samples and printed materials** for product presentation and sales promotion at the POS. You can find an overview of all our presentation media, from brochures to displays, in our sales promotion brochure, **“Advertising with wineo”**.

Naturally, we can also work with you to tailor materials to your **specific needs**.

Just get in touch!




SEMINARS

Take advantage of our seminar offer to improve your know-how, optimize your installation technique or sales strategy and reap the benefits of a successful partnership. wineo product training seminars are informative, practical and tailored, and prepare you fully for working with our floors. You can find more information on our website, including how to register for a seminar.



NEWSLETTER

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

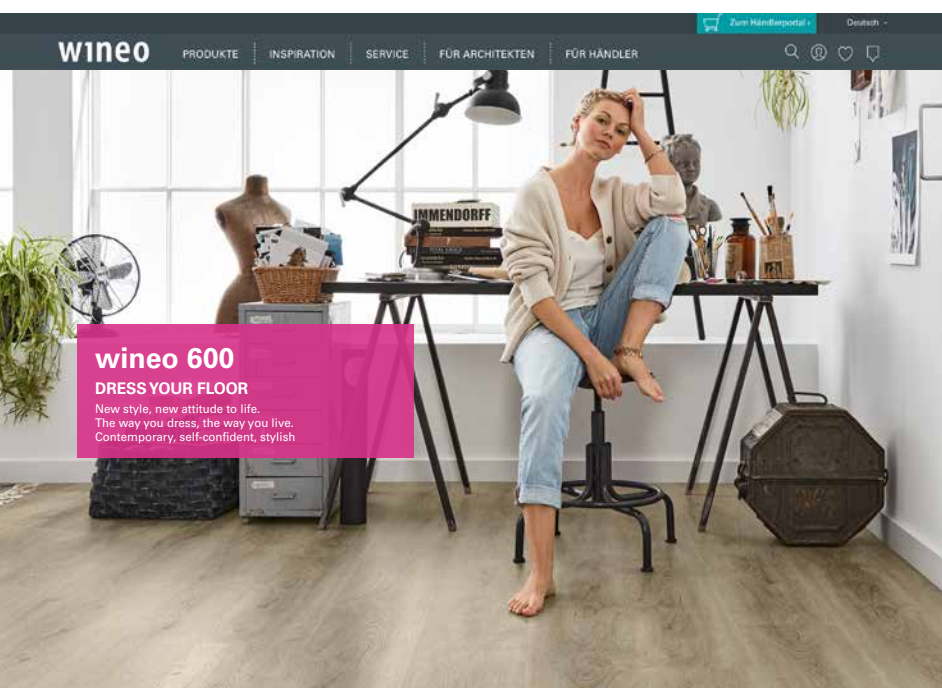

EN.WINEO.DE

- information and references as well as relevant downloads on the products
- retailer portal with direct ordering option and query of product availability
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions



windmüller



PIONEER THINKING



THE BEST QUALITY FOR OVER 70 YEARS

For us, outstanding quality means more than an excellent product. As a family business in its 3rd generation we carry a high level of social and ecological responsibility. That's why we always provide you with the greatest possible level of transparency. And therefore even more safety.


- many quality controls from the initial mixing of the ingredients to the completion stage
- traceability of the exact time of production via a reverse-side overprint
- outstanding attributes regarding durability, maintenance and safety



(only for wineo 600)

CE marking

The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection.



A+

Just like the “Blue Angel” in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market.



PEFC

The PEFC quality seal is based on very strict guidelines for managing our forests in a sustainable manner and guarantees that timber is used from verified cultivation sources. The entire product manufacturing process – from the raw materials through to the ready-to-use end product – is certified and verified by independent assessors.









TFI-TÜV PROFICERT PREMIUM

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.























*Illustration applies to selected products.

COLLECTION OVERVIEW

Collection	wineo 400 wood			wineo 400 wood XL		
	Multi-Layer			Multi-Layer		
						
Installation type	Glue	Click	Click	Glue	Click	Click
Connection	-	Connect	LocTec®	-	Connect	LocTec®
Core board	-	-	Aqua-Protect®	-	-	Aqua-Protect®
Format	1200 × 180 mm	1212 × 187 mm	1222 × 182 mm	1505 × 235 mm	1507 × 235 mm	1520 × 230 mm
Product thickness	2 mm	4.5 mm	9 mm	2 mm	4.5 mm	9 mm
Wear layer	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm	0.3 mm
Planks or tiles / box	18 / 3.89 m²	10 / 2.27 m²	9 / 2.00 m²	12 / 4.24 m²	6 / 2.12 m²	6 / 2.10 m²
Boxes / pallet	60 / 233.40 m²	48 / 108.96 m²	44 / 88.00 m²	64 / 271.36 m²	52 / 110.24 m²	52 / 109.20 m²
Surface treatment	PU	PU	PU	PU	PU	PU
Bevelled edge	■	■	-	■	■	-
Real joint	-	-	-	-	-	-
Utilisation class EN ISO 10874	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31
Binder content EN ISO 10582	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I
Reaction to fire EN 13501-1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1
Anti slip category DIN 51130	R 9	R 9	R 9	R 9	R 9	R 9
Slip resistance EN 13893	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS
Anti-static properties EN 1815	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
Staining / Chemical resistance EN ISO 26987						
Light fastness EN ISO 105-B02 (procedure 2)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Residual indentation EN ISO 24343-1 in combination with silentPREMIUM	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm -
Castor chair test ISO 4918	-	-	-	-	-	-
Suitability for underfloor heating						
Thermal resistance (m²K) / W EN12667 in combination with silentCOMFORT	~ 0.011	~ 0.012	≤ 0.058	~ 0.011	~ 0.012	≤ 0.058
in combination with silentPREMIUM	-	~ 0.022	-	-	~ 0.022	-
in combination with silentPLUS	~ 0.021	-	-	~ 0.021	-	-
in combination with silentRIGID	-	-	-	-	-	-
Impact sound reduction EN ISO 16251-1 in combination with silentCOMFORT	~ 4 dB	~ 7 dB	~ 14 dB	~ 4 dB	~ 7 dB	~ 14 dB
in combination with silentPREMIUM	-	~ 16 dB	-	-	~ 16 dB	-
in combination with silentPLUS	-	-	-	-	-	-
in combination with silentRIGID	~ 17 dB	-	-	~ 17 dB	-	-
Dimensional stability EN ISO 23999	~ 0.15 %	~ 0.1 %	-	~ 0.15 %	~ 0.1 %	-
Guarantee for private use according to Windmüller warranty conditions	15 years	15 years	20 years	15 years	15 years	20 years
Extended warranty for laying PU underlay mat	+5 years	+5 years	already integrated	+5 years	+5 years	already integrated
Designs	18			12		
Page	22 – 25			26 – 27		

*For wineo 600 rigid: Resistance to staining EN 438-2
Group 1 + 2: Measurement 5
Group 3: Measurement 4

wineo 400 stone			wineo 600 wood		wineo 600 wood XL		wineo 600 stone XL		wineo	
Multi-Layer			Rigid		Rigid		Rigid			
										
-	Connect	LocTec®	-	Connect	-	Connect	-	Connect	-	
-	-	Aqua-Protect®	-	-	-	-	-	-	-	
609.6 × 304.8 mm	600 × 316 mm	601 × 310 mm	1200 × 180 mm	1212 × 186 mm	1505 × 235 mm	1507 × 234 mm	914 × 457 mm	748 × 477 mm	1200 × 180 mm	
2 mm	4.5 mm	9 mm	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2.5 mm	
0.3 mm	0.3 mm	0.3 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.4 mm	0.55 mm	
18/3.34 m²	12/2.28 m²	9/1.68 m²	18/3.89 m²	8/1.80 m²	12/4.24 m²	6/2.12 m²	12/5.01 m²	6/2.14 m²	16/3.46 m²	
60/200.40 m²	48/109.44 m²	60/100.80 m²	60/233.40 m²	56/100.80 m²	64/271.36 m²	48/101.76 m²	52/260.52 m²	44/94.16 m²	75/259.50 m²	
PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	
-	-	-	■	■	■	■	■	-	■	
-	■	-	-	-	-	-	-	■	-	
23/31	23/31	23/31	23/32/41	23/32	23/32/41	23/32	23/32/41	23/32	23/33/42	
Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	
B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	
R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 9	R 10	
μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	
≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	
High resistance level depending on concentration and exposure time.*										
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	
≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	≤ 0.1 mm -	≤ 0.1 mm ~ 0.17 mm	
-	-	-								25,00
Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.										
~ 0.011	~ 0.012	≤ 0.058	≤ 0.011	≤ 0.05	≤ 0.011	≤ 0.05	≤ 0.011	≤ 0.05	≤ 0.015	
-	~ 0.022	-	-	-	-	-	-	-	-	
~ 0.021	-	-	≤ 0.021	-	≤ 0.021	-	≤ 0.021	-	≤ 0.025	
-	-	-	-	~ 0.06	-	~ 0.06	-	~ 0.06	-	
~ 4 dB	~ 7 dB	~ 14 dB	~ 4 dB	~ 6 dB	~ 4 dB	~ 6 dB	~ 4 dB	~ 6 dB	~ 4 dB	
-	~ 16 dB	-	-	-	-	-	-	-	-	
-	-	-	~ 15 dB	-	~ 15 dB	-	~ 15 dB	-	~ 17 dB	
~ 17 dB	-	-	~ 17 dB	-	~ 17 dB	-	~ 17 dB	-	~ 17 dB	
-	-	-	-	~ 13 dB	-	~ 13 dB	-	~ 13 dB	-	
~ 0.15 %	~ 0.1 %	-	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	
15 years	15 years	20 years	20 years	20 years	20 years	20 years	20 years	20 years	25 years	
+5 years	+5 years	already integrated	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	
10			6		12		6			
28 – 29			34 – 35		36 – 39		40 – 43			
							52			

800 wood	wineo 800 wood XL		wineo 800 stone XL		wineo 800 tile			wineo 800 craft	
					L	XL	XXL		
									
Click	Glue	Click	Glue	Click	Glue	Glue	Glue	Glue	Glue
Connect	-	Connect	-	Connect	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
1212 × 185 mm	1505 × 235 mm	1505 × 237 mm	914.4 × 457.2 mm	914 × 480 mm	457.2 × 457.2 mm	914.4 × 457.2 mm	914.4 × 914.4 mm	457.2 × 457.2 mm	914.4 × 101.6 mm
5 mm	2.5 mm	5 mm	2.5 mm	5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm
0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm	0.55 mm
8/1.79 m²	12/4.24 m²	6/2.14 m²	10/4.18 m²	6/2.63 m²	16/3.34 m²	10/4.18 m²	6/5.02 m²	16/3.34 m²	20/1.86 m²
64/114.56 m²	60/254.40 m²	56/119.84 m²	40/167.20 m²	44/115.72 m²	52/173.68 m²	40/167.20 m²	37/185.74 m²	52/173.68 m²	135/251.10 m²
PU	PU	PU	PU	PU	PU	PU	PU	PU	PU
■	■	■	-	DLC00088 – 90. 94	■	■	■	■	■
-	-	-	-	DLC00084 – 87 DLC00091.95	-	-	-	-	-
23/33	23/33/42	23/33	23/33/42	23/33	23/33/42	23/33/42	23/33/42	23/33/42	23/33/42
Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I	Typ I
B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1
R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10
μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS	μ ≥ 0.30 – DS
≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm	≤ 0.1 mm
-	~ 0.17 mm	-	~ 0.17 mm	-	~ 0.17 mm	~ 0.17 mm	~ 0.17 mm	~ 0.17 mm	~ 0.17 mm
0 revolutions, no damage with rolls type W									
≤ 0.021 ≤ 0.031	≤ 0.015 -	≤ 0.021 ≤ 0.031	≤ 0.015 -	≤ 0.021 ≤ 0.031	≤ 0.015 -	≤ 0.015 -	≤ 0.015 -	≤ 0.015 -	≤ 0.015 -
-	≤ 0.025	-	≤ 0.025	-	≤ 0.025	≤ 0.025	≤ 0.025	≤ 0.025	≤ 0.025
-	-	-	-	-	-	-	-	-	-
~ 7 dB ~ 16 dB	~ 4 dB -	~ 7 dB ~ 16 dB	~ 4 dB -	~ 7 dB ~ 16 dB	~ 4 dB -	~ 4 dB -	~ 4 dB -	~ 4 dB -	~ 4 dB -
-	~ 17 dB	-	~ 17 dB	-	~ 15 dB	~ 15 dB	~ 15 dB	~ 15 dB	~ 15 dB
-	~ 17 dB	-	~ 17 dB	-	~ 17 dB	~ 17 dB	~ 17 dB	~ 17 dB	~ 17 dB
-	-	-	-	-	-	-	-	-	-
~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.1 %	~ 0.15 %	~ 0.15 %	~ 0.15 %	~ 0.15 %	~ 0.15 %
25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years	25 years
+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years	+5 years
9	9	9	10	10	8	8	2	2	4
– 55	52 – 55	58 – 59	60 – 61	62 – 63					



■ R 10 applies for all designated decors, except “Heavy Metal”
■ Cleaning and maintenance instructions online at www.wineo.de/Service
■ All decors shown in this brochure are reproductions. Windmöller GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.

SYMBOLS

INSTALLATION TYPES



Glue



Click

PRODUCT FEATURES



Suitability for chair castors



Bevelled edge



Real joint



PU surface coating



UV surface coating



Underlay mat soundPROTECT



Tele-Stop

UTILISATION CLASSES



Utilisation class 23:
Domestic area
with intensive usage



Utilisation class 31:
Commercial sector
with low or occasional usage



Utilisation class 32:
Commercial sector
with average usage



Utilisation class 33:
Commercial sector
with heavy usage



Utilisation class 41:
Light industry sector
with moderate usage



Utilisation class 42:
Light industry sector
with regular usage

GARANTIE



15 year guarantee (for private application)



20 year guarantee (for private application)



25 year guarantee (for private application)



30 year guarantee (for private application)

Windmüller GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Member of



Handed over by:

Product no. 20061112 | 02/2020

wineo