



Product Line Laying Materials

Effective from 1/2020

Wakol GmbH
Bottenbacher Straße 30
D-66954 Pirmasens
Tel. +49 6331 8001 131
Fax +49 6331 8001 890
www.wakol.com



Wakol GmbH
Industriestraße 5
A-6841 Mäder
Tel. +43 5523 64 700
Fax +43 5523 64 700 64
www.wakol.at

Wakol Foreco srl
Via Kennedy 75
I-20010 Marcallo con Casone (MI)
Tel. +39 02 9761 939
Fax +39 02 9725 3021
www.wakolforeco.it

Loba-Wakol LLC
2401 Whitehall Park Drive - Suite 950
Charlotte, NC 28273, USA
Tel. +1 704 527 5919
Fax +1 704 527 5922
www.loba-wakol.com

Lecol Chemie B.V.
Schutweg 6
NL-5145 NP Waalwijk
Tel. +31 416 566 540
Fax +31 416 566 531
www.lecol.nl

Wakol Adhesa AG/SA
Schützengasse 28
CH-9410 Heiden
Tel. +41 31 9210 755
Fax +41 31 9212 968
www.wakoladhesa.ch

Loba-Wakol Polska Sp. z o.o.
ul. Sławęcińska 16, Macierzysz
PL-05-850 Ożarów Mazowiecki
Tel. +48 22 436 24 20
Fax +48 22 436 24 21
www.loba-wakol.pl

Loba GmbH & Co. KG
Leonberger Straße 56-62
D-71254 Ditzingen
Tel. +49 7156 357 220
Fax +49 7156 357 221
www.loba.de

PREPARING _____ 4

LEVELLING _____ 11

BONDING PVC / RUBBER FLOORINGS _____ 20

LINOLEUM / TEXTILE FLOORINGS _____ 28

BONDING PARQUET / CORK FLOORINGS _____ 35

FIXING FLOORINGS _____ 46

LAYING CONDUCTIVE FLOORINGS _____ 48

UNDERLAYS / MATS / ACCESSORIES _____ 50

TOOLS / ACCESSORIES _____ 58

WORKING CLOTHES / EQUIPMENT _____ 64

TABLES FOR INSTALLATION _____ 66

SYMBOLS / EXPLANATIONS _____ 80

TROWEL NOTCH SIZES _____ 83

Please always observe the Technical Information before processing.

WAKOL MS 330 Silane Primer



Area of application:
Ready-to-use 1-component MS primer for priming absorbent and non-absorbent subfloors, and to reinforce abraded resp. sanded concrete edges. Also for blocking higher residual humidity up to max. 5 CM% / 95 corresponding RH % in cement screeds without floor heating, up to max. 3 CM% / 85 corresponding RH % with floor heating as well as up to max. 7 % by weight / 95 corresponding RH % in concrete before laying Wakol MS Adhesives.

Application method:
as primer with WAKOL Primer Roller or velour roller, as moisture barrier with WAKOL MS Special Roller or trowel notch size according to TKB A2

Consumption:
approx. 80-120 g/m² as primer, approx. 250 g/m² as moisture barrier

Drying time:
approx. 60 minutes

Storage:
not sensitive to frost

Base:
MS polymer

Order information:
361403 - 10.0 kg - pallet: 60 pieces

WAKOL PU 280 Polyurethane Primer



Area of application:
Ready-to-use 1-component polyurethane primer for priming absorbent and non-absorbent subfloors, and to reinforce abraded resp. sanded concrete edges. Also for capillary ascending humidity and higher residual humidity up to 6 CM% / 98 corresponding RH % in cement screeds without floor heating, on heated cement screeds up to max. 3 CM% / 85 corresponding RH % as well as on concrete up to max. 7,5% by weight / 98 corresponding RH %; applicable as moisture barrier on unheated cement screeds and concretes without prior moisture measurement.

Application method:
WAKOL Primer Roller, short haired velour or foam roller

Consumption:
approx.100-150 g/m² as primer, approx. 250-350 g/m² as moisture barrier

Drying time:
approx. 40-50 minutes

Storage:
not below +5 °C, store in a cool place

Base:
polyurethane resin

Order information:
364003 - 11.0 kg - pallet: 60 pieces
364004 - 5.0 kg - pallet: 96 pieces

WAKOL PU 235 Polyurethane Primer



Area of application:
Ready-to-use 1-component polyurethane primer for priming absorbent and non-absorbent subfloors, and to reinforce abraded resp. sanded concrete edges. Also for capillary ascending humidity and higher residual humidity up to 6 CM% / 98 corresponding RH % in cement screeds without floor heating, on heated cement screeds up to max. 3 CM% / 85 corresponding RH % as well as on concrete up to max. 7,5% by weight / 98 corresponding RH %.

Application method:
WAKOL Primer Roller, short haired velour or foam roller

Consumption:
approx.100-150 g/m² as primer, approx. 250-350 g/m² as moisture barrier

Drying time:
approx. 4-6 hours

Storage:
not below +5 °C, store in a cool place

Base:
polyurethane resin

Order information:
364103 - 11.0 kg - pallet: 60 pieces

WAKOL D 3080 Dispersion Moisture Barrier



Area of application:
Dispersion primer for blocking higher residual humidity up to 5 CM% / 95 corresponding RH % in cement screeds without floor heating, up to max. 3 CM% / 85 corresponding RH % with floor heating before subsequent levelling with cement-based Wakol levelling compounds indoors.

Application method:
WAKOL Primer roller, short haired velour or foam roller

Consumption:
1st application 60-75 g/m² 1:1 diluted, 2nd application 100-120 g/m² undiluted

Drying time:
1st application at least 30 minutes, 2nd application at least 120 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
polymer dispersion

Order information:
308005 - 11.0 kg - pallet: 60 pieces

WAKOL D 3055 Parquet Primer



Area of application:
Ready-to-use dispersion-based primer for priming absorbent cement- and calcium sulphate concrete as well as gypsum fibre boards before subsequent laying of parquet with Wakol parquet adhesives indoors.

Application method:
WAKOL Primer Roller, velour or foam roller

Consumption:
ca. 100-150 g/m²

Drying time:
on cement screeds following visible drying approx. 30 minutes, on calcium sulphate concrete and gypsum fibre boards after approx. 2 hours

Storage:
not below +5 °C, sensitive to frost

Base:
polyurethane dispersion

Order information:
305504 - 10.0 kg - pallet: 60 pieces

WAKOL D 3045 Special Primer



Area of application:
Ready-to-use dispersion-based primer to use as an adhesive bridge for Wakol levelling compounds on WAKOL PU 280 Polyurethane Primer, WAKOL PU 235 Polyurethane Primer or WAKOL MS 330 Silane Primer, cast asphalt and wooden material tiles, old waterproof adhesive residues as well as thoroughly cleaned ceramic tiles, natural stone flooring and terrazzo indoors.

Application method:
WAKOL Primer Roller, velour or foam roller

Consumption:
100-150 g/m²

Drying time:
approx. 30-60 minutes, approx. 60-120 minutes on wooden material tiles

Storage:
not below +5°C, sensitive to frost

Base:
acrylate dispersion

Order information:
304505 - 12.0 kg - pallet: 40 pieces

WAKOL D 3040 Primer Concentrate



Area of application:
Dispersion-based primer concentrate for priming cement-, calcium sulphate, cast asphalt concrete, magnesite screed (with exclusively mineral-based additives), concrete, tiles, terrazzo, water resistant adhesive residues, wood planks and gypsum fibre boards before subsequent levelling indoors.

Application method:
WAKOL Primer Roller, velour or foam roller

Consumption:
approx. 50 g/m² concentrate

Drying time:
on cement screeds and concrete following visible drying; on cast asphalt, tiles, terrazzo and water resistant adhesive residues at least 60 minutes, on calcium sulphate concrete, magnesite screed, wood plank, gypsum fibre boards 2-4 hours

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
304004 - 10.0 kg - pallet: 60 pieces
304005 - 5.0 kg - pallet: 96 pieces
304006 - 1.0 kg - pallet: 40 boxes with 12 pieces each

WAKOL D 3035 Dispersion Primer



Area of application:
Ready-to-use dispersion-based primer for priming cement-, calcium sulphate, cast asphalt concrete, magnesite screed (with exclusively mineral-based additives), concrete, tiles, terrazzo, water resistant adhesive residues, wood planks and gypsum fibre boards before subsequent levelling indoors.

Application method:
WAKOL Primer Roller, velour or foam roller

Consumption:
approx. 100-150 g/m²

Drying time:
on cement screeds and concrete following visible drying; on cast asphalt, tiles, terrazzo and water resistant adhesive residues at least 60 minutes, on calcium sulphate concrete, magnesite screed, wood plank, gypsum fibre boards 2-4 hours

Storage information:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
303504 - 10.0 kg - pallet: 60 pieces

WAKOL DL 3078 Conductive Primer



Area of application:
Ready-to-use conductive dispersion-based primer for subsequent conductive laying of textile and elastic floorings. WAKOL DL 3078 replaces the laying of a copper band net.

Application method:
finely porous foam roller

Consumption:
approx. 120-150 g/m²

Drying time:
approx. 3-5 hours

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
307803 - 10.0 kg - pallet: 60 pieces

WAKOL PS 275 Concrete Repair Primer



Area of application:
Ready-to-use primer to strengthen dry, porous, completely brittle, absorbent, cement based subfloors indoors.

Application method:
WAKOL MS Special Roller or velour roller

Consumption:
approx. 600 g/m², depending on the absorption of the subfloor

Drying time:
3-5 days

Storage:
not below +5 °C, sensitive to frost

Base:
sodium silica

Order information:
361603 - 11.0 kg - pallet: 60 pieces

WAKOL MS 315 Cast Resin



Area of application:
Quick hardening MS cast resin for repairing screed cracks, for force-locked sealing of screed joints as well as for bonding metal profiles and artificial or natural stone on absorbent and non-absorbent subfloors indoors and outdoors.

Application method:
using spray grommet for cracks, cementing work with serrated trowel

Consumption:
depending on the scope of the repair work

Open time:
approx. 15 minutes

Hardening time:
approx. 90 minutes

Pot life:
approx. 15 minutes

Storage:
not sensitive to frost

Base:
MS polymer

Order information:
360606 - 0.8 kg - pallet: 480 pieces; 80 boxes with 6 pieces each + 6 x 20 corrugated connectors

WAKOL PS 205 Cast Resin



Area of application:
Quick hardening polymer-modified two-component silica resin for renovating concrete subfloor cracks as well as for bonding studded boards, metal sections and synthetic or natural stone to absorbent and non-absorbent subfloors indoors.

Mixture:
1:1 parts by volume

Consumption:
depending on the scope of the repair work, for adhesive work approx. 200-300 g/m²

Hardening time:
15 °C approx. 40 min., 20 °C approx. 30 min., 25 °C approx. 22 min., 30 °C approx. 18 min.

Pot life:
15 °C approx. 13 min., 20 °C approx. 10 min., 25 °C approx. 8 min., 30 °C approx. 7 min.

Storage:
not below +10 °C, store in a cool and dry place

Base:
silica resin

Order information:
360505 - 300 ml A-comp. - pallet: 480 pieces; 40 boxes with 6 pieces A+B + 6 x 20 corrugated connectors
360405 - 300 ml B-comp. - pallet: 480 pieces; 40 boxes with 6 pieces A+B + 6 x 20 corrugated connectors

WAKOL R 4515 Tile Cleaner



Area of application:
Cleaner for manual or machine application on old tiled floors for removal of layers of old care products and extreme dirt before subsequent laying.

Mixture:
1 part WAKOL R 4515 + 3 parts water

Consumption:
1.0 l WAKOL R 4515 / 20 m²

Storage:
not below +5 °C, sensitive to frost

Base:
tensides

Order information:
451505 - 5.0 l - pallet: 128 pieces

WAKOL D 3060 Plastification Additive



Area of application:
Ready-to-use dispersion for upgrading WAKOL Z 645 Filling Compound, WAKOL Z 640 Filling Compound, WAKOL Z 630 Levelling Compound, WAKOL Z 625 Levelling Compound, WAKOL Z 615 Levelling Compound, dust-reduced and WAKOL A 830 Levelling Compound to increase adhesion, flexibility and reduction of shrinkage tension for applications indoors.

Mixture:
approx. 6.25-8.0 l WAKOL D 3060 + 25 kg of Levelling Compound

Storage information:
not below +5 °C; sensitive to frost

Base:
polyacrylate dispersion

Order information:
306003 - 10.0 kg - pallet: 60 pieces

WAKOL D 3050 Plastification Additive



Area of application:
Ready-to-use dispersion for upgrading WAKOL Z 615 Levelling Compound, dust-reduced to increase adhesion, flexibility and reduction of shrinkage tension for applications indoors.

Mixture:
approx. 6.25-7.25 l WAKOL D 3050 + 1 sac of levelling Compound

Storage information:
not below +5 °C; sensitive to frost

Base:
acrylate dispersion

Order information:
305004 - 10.0 kg - pallet: 60 pieces

WAKOL Z 615 Levelling Compound, dust-reduced



Area of application:
Cement-based levelling compound for treating unevenness in layer thickness of 1 to 10 mm unextended, extended of 10 to 30 mm indoors. For higher loads and as of 2 mm layer thickness suitable underneath parquets. Suitable for heavy loads of 3 mm layer thickness. Can be processed in combination with WAKOL D 3060 Plastification Additive. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 6.25-6.5 l water + 25 kg Z 615

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 2 h; ready for laying up to 3 mm after 12 h; up to 5 mm after 24 h; up to 10 mm after 48 h; up to 15 mm after 72 h; up to 30 mm after 6 days

Pot life:
approx. 20 min.

Extended:
10-30 mm

Unextended:
1-10 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F7

Order information:
505908 - 25.0 kg - pallet: 42 pieces

WAKOL Z 625 Levelling Compound



Area of application:
Cement-based levelling compound for treating unevenness in layer thickness of 1 to 20 mm unextended, extended from 10 to 30 mm indoors. For higher loads and as of 2 mm layer thickness suitable underneath parquets. Suitable for heavy loads of 3 mm layer thickness. Can be processed in combination with WAKOL D 3060 Plastification Additive. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 6.0-6.25 l water + 25 kg Z 625

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 2 h; ready for laying up to 5 mm after 6 h, up to 10 mm after 12 h, up to 30 mm after 24 h

Pot life:
approx. 25 min.

Extended:
10-30 mm

Unextended:
1-20 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F7

Order information:
506812 - 25.0 kg - pallet: 40 pieces

WAKOL Z 630 Levelling Compound



Area of application:
Cement-based levelling compound for treating unevenness in layer thicknesses of 1 to 10 mm unextended, extended up to 20 mm indoors. As of 2 mm layer thickness also underneath parquet. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 6.0 l water + 25 kg Z 630

Consumption:
approx. 1.5 kg/m²/ application thickness

Setting time:
suitable for walking after approx. 2-3 h; ready for laying up to 5 mm after 24 h; up to 10 mm after 48 h; up to 20 mm after 5 days

Pot life:
approx. 20 min.

Extended:
up to 20 mm

Unextended:
1-10 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F7

Order information:
506412 - 25.0 kg - pallet: 40 pieces

WAKOL Z 635 Levelling Compound



Area of application:
Cement-based levelling compound for treating unevenness in layer thicknesses of 1 to 10 mm under textile and elastic flooring and cork flooring indoors. As of 3 mm layer thickness also underneath parquet. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 6.25 l water + 25 kg Z 635

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 2.5 h; ready for laying up to 5 mm after 24 h; up to 10 mm after 72 h; up to 3 mm under parquet after 24 h

Pot life:
approx. 30 min.

Extended:
-

Unextended:
1 - 10 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F7

Order information:
508002 - 25.0 kg - pallet: 40 pieces

WAKOL Z 675 Levelling Compound



Area of application:
Cement-based levelling compound for treating unevenness in layer thicknesses of 1 to 5 mm under textile and elastic flooring indoors. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 6.0 l water + 25 kg Z 675

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 3 h; ready for laying up to 2 mm after 24 h; up to 5 mm after 48 h

Pot life:
approx. 30 min.

Extended:
-

Unextended:
1-5 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C30-F7

Order information:
506312 - 25.0 kg - pallet: 40 Stück

WAKOL Z 680 Levelling Compound



Area of application:
Cement-based levelling compound for treating unevenness in layer thicknesses of 1 to 5 mm under textile and elastic flooring indoors. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 6.0 l water + 25 kg Z 680

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 2-3 h; ready for laying up to 2 mm after 24 h

Pot life:
approx. 25 min.

Extended:
-

Unextended:
1-5 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C20-F5

Order information:
506902 - 25.0 kg - pallet: 42 pieces

WAKOL Z 715 Quick Setting Levelling Compound



Area of application:
Cement-based quick levelling compound for treating unevenness in layer thickness of 1 to 10 mm unextended, extended from 5 to 25 mm indoors. Suitable for heavy loads of 3 mm layer thickness. Can be applied with a rakel. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 5.75-6.0 l water + 25 kg Z 715

Consumption:
approx. 1.6 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 1-1.5 h; ready for laying up to 10 mm depending on layer thickness after 1.5-12 h

Pot life:
approx. 20 min.

Extended:
5-25 mm

Unextended:
1-10 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C50-F10

Order information:
507203 - 25.0 kg - pallet: 42 pieces

WAKOL A 830 Levelling Compound



Area of application:
Levelling Compound based on calcium sulphate for treating unevenness in layer thicknesses of 1 to 20 mm unextended, extended of 10 to 30 mm under textile and elastic flooring indoors; as of 2 mm layer thickness also underneath parquet. Can be processed in combination with WAKOL D 3060 Plastification Additive. Especially suitable on calcium sulphate bonded subfloors, dry extension elements, wooden material tiles and on cast asphalt concrete. Can be applied with a rakel. Can be pumped.

Mixture:
approx. 6,0 l water + 25 kg A 830

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking after 2 h; veady for laying up to 3 mm after 24h; 3-10 mm every mm 24 h drying time, ≥ 11 mm CM measurement (residual humidity < 0.5 CM%)

Pot life:
approx. 25 min.

Extended:
10-30 mm

Unextended:
1-20 mm

Storage:
store in a cool and dry place

Base:
calcium sulfate

CE mark:
EN 13813:2002 CA-C30-F7

Order information:
507703 - 25.0 kg - pallet: 42 pieces

WAKOL Z 640 Filling Compound



Area of application:
Fine, stable, cement-based levelling compound for treating unevennesses, for smoothing steps and door joints as well as for repairing concrete subfloor damage with layer thickness up to 20 mm unextended, extended from 10 to 50 mm indoors. Flexible. Very good moldability. Low in chromate according to REACH.

Mixture:
approx. 6.75-7.5 l water + 25 kg Z 640

Consumption:
approx. 1.4 kg/m²/mm application thickness

Setting time:
suitable for walking and coverable after approx. 30 min., ready for laying after approx. 3 h

Usage:
only with water or with WAKOL D 3060

Pot life:
approx. 15 min.

Extended:
10 to 50 mm

Unextended:
up to 20 mm

Storage:
store in a cool and dry place, tightly seal any opened bags and use as soon as possible

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F6

Order information:
506512 - 25.0 kg - pallet: 40 pieces

WAKOL Z 645 Filling Compound



Area of application:
Stable, cement-based levelling compound for treating unevenness, for smoothing steps and door joints and for repairing concrete subfloor damage in layer thicknesses of 1 to 10 mm unextended, extended up to 50 mm indoors. Flexible. Very good moldability. Low in chromate according to REACH.

Mixture:
approx. 6.75-8.0 l water + 25 kg Z 645

Consumption:
approx. 1.3 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 30 min., ready for laying after approx. 60 min.

Usage:
only with water or with WAKOL D 3060

Pot life:
approx. 15 min.

Extended:
up to 50 mm

Unextended:
1-10 mm

Storage:
store in a cool and dry place, tightly seal any opened bags and use as soon as possible

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F7

Order information:
506712 - 25.0 kg - pallet: 40 pieces

WAKOL Z 515 Thin Screed



Area of application:
Quick-drying, self-levelling, cement-based thin screed, for treating unevenness in layer thicknesses between 3-30 mm unextended, 10-40 mm extended, under textile and elastic floorings indoors as well as cork floorings. As of 2 mm layer thickness suitable underneath parquets. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 4.25 l water + 25 kg Z 515

Consumption:
approx. 1.7 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 2 h, ready for laying after 24 h

Pot life:
approx. 25 min.

Extended:
10-40 mm

Unextended:
3-30 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F7

Order information:
505822 - 25.0 kg - pallet: 40 pieces

WAKOL Z 560 Rapid Screed



Area of application:
Fast-drying, low-tension quick cement screed for use in layer thicknesses between 20-60 mm for repairing and restoring flaws and imperfections, as well as for manufacturing compound screeds (from 20 mm), screeds on separating layers (from 35 mm) and screeds on insulation layers (from 35 mm) in internal areas. Can be pumped. Low in chromate according to REACH.

Mixture:
approx. 1.8 l water + 25 kg Z 560

Consumption:
approx. 1.85 kg/m²/mm application thickness

Setting time:
suitable for walking after approx. 3 h, coverable after approx. 3-4 h; ready for laying after 24 h

Pot life:
approx. 60 min.

Extended:
-

Unextended:
20-60 mm

Storage:
store in a cool and dry place

Base:
special cement

CE mark:
EN 13813:2002 CT-C35-F6

Order information:
505102 - 25.0 kg - pallet: 40 pieces

WAKOL Z 505 Repair Compound, fine



Area of application:
Cement-based repair compound for partial fine skimming, for treating unevenesses, for touching up subfloors, for smoothing steps and for patching door joints, for filling holes, depressions and cracks indoors. Low in chromate according to REACH.

Mixture:
approx. 0.33 l water + 1 kg Z 505

Consumption:
approx. 1.5 kg/m²/mm application thickness

Setting time:
suitable for walking and coverable after approx. 10 min., ready for laying after approx. 30 min., 12 h for laying parquet

Pot life:
approx. 5 min.

Extended:
-

Unextended:
0-70 mm

Storage:
store in a cool and dry place, not sensitive to frost

Base:
special cement

CE mark:
EN 13813:2002 CT-C20-F7

Order information:
503804 - 5.0 kg - pallet: 72 pieces

WAKOL AR 114 Reinforcement Fibres



Area of application:
Alkali-resistant glass fibres for reinforcing WAKOL Z 615 Levelling Compound, dust-reduced, WAKOL Z 625 Levelling Compound, WAKOL Z 630 Levelling Compound and WAKOL A 830 Levelling Compound for reducing cracking on unstable subfloors, wood planks, wooden material tiles and prefabricated screeds indoors.

Consumption:
1 bag per sac of levelling compound

Storage information:
store in a cool and dry place, not sensitive to frost

Base:
alkali-resistant glass fibres

Order information:
595505 - 15 bags with 0.25 kg each - pallet: 750 pieces; 50 buckets with 15 bags each

WAKOL S 28 Sprinkling Sand



Area of application:
Washed and annealed sand with irregular, broken grain and a grain size of 0.2 to 0.8 mm for sprinkling reaction adhesives and reaction primers, as well as WAKOL PS 205 Cast Resin or WAKOL PS 275 Concrete Repair Primer.

Application method:
by hand

Consumption:
500-1000 g/m²

Storage:
store in cool and dry place, not sensitive to frost

Base:
special sand

Order information:
506103 - 25.0 kg - pallet: 40 pieces
506102 - 16.0 kg - pallet: 44 pieces

WAKOL MS 550 PVC and Rubber Adhesive



Area of application:
1-component MS adhesive for laying homogeneous and heterogeneous PVC flooring in planks and tiles, LVT flooring, CV flooring, needle fleece flooring, linoleum flooring, PVC cork flooring, entrance mats, artificial lawn as well as caoutchouc flooring in planks and tiles on absorbent and non-absorbent subfloors indoors and outdoors. Waterproof. WAKOL MS 550 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A1, A2, B1 or B2

Consumption:
approx. 300-580 g/m²

Airing time:
approx. 0-20 minutes

Open time:
approx. 35 minutes

Storage:
not sensitive to frost

Base:
MS polymer

Order information:
363805 - 7.5 kg - pallet: 72 pieces

WAKOL MS 552 PVC and Rubber Adhesive



Area of application:
1-component MS adhesive for laying LVT flooring, PVC flooring, CV flooring as well as caoutchouc flooring on absorbent and non-absorbent wall and floor areas indoors. Waterproof. WAKOL MS 552 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A1 or A2

Consumption:
approx. 300-400 g/m²

Airing time:
approx. 5-30 minutes

Open time:
approx. 10-35 minutes

Storage:
not sensitive to frost

Base:
MS polymer

Order information:
363905 - 7.5 kg - pallet: 72 pieces

WAKOL PU 270 Polyurethane Adhesive



Area of application:
2-component polyurethane adhesive for laying rubber flooring with smooth and profiled backing, linoleum flooring, textile flooring, outdoor flooring and PVC flooring on absorbent and non-absorbent subfloors indoors and outdoors. Waterproof. WAKOL PU 270 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2, B1 or B2

Consumption:
approx. 350-700 g/m²

Airing time:
approx. 5-70 minutes, depending on type of floor covering

Open time:
approx. 70-80 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
polyurethane resin

Order information:
369206 - 6.0 kg A-comp. - pallet: 60 pieces combination pack A+B
369306 - 1.05 kg B-comp. - pallet: 60 pieces combination pack A+B

WAKOL DL 3365 StarLeit



Area of application:
Light-coloured, fibre-containing dispersion adhesive for the laying of conductive PVC, textile and linoleum flooring as well as for conductive caoutchouc flooring of thickness up to 4 mm on appropriately prepared subfloors. WAKOL DL 3365 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB S2, Pajarito 7 or Pajarito 25; trowel notch enclosed

Consumption:
approx. 250-550 g/m²

Airing time:
approx. 10-15 minutes

Open time:
approx. 20-40 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
336504 - 12.0 kg - pallet: 40 pieces

WAKOL D 3360 VersaTack



Area of application:
Dispersion adhesive for laying linoleum, caoutchouc flooring up to 2.5 mm layer thickness, textile flooring with fleece backing, latex foam backing, synthetic double backing or jute backing, woven textile flooring and needle fleece flooring on absorbent subfloors as well as for PVC and CV flooring on absorbent and non-absorbent subfloors. WAKOL D 3360 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A1, A2, B1 or B2

Consumption:
approx. 250-550 g/m²

Airing time:
approx. 10-20 minutes

Open time:
approx. 20-30 minutes

Storage:
not below +5°C, sensitive to frost

Base:
acrylate dispersion

Order information:
336002 - 14.0 kg - pallet: 44 pieces
336004 - 6.0 kg - pallet: 90 pieces

WAKOL D 3330 LVT Flooring Adhesive



Area of application:
Dispersion adhesive for laying approved LVT flooring in tiles and planks up to a max. lengths of 125 cm and flat-lying heterogeneous PVC or CV flooring in rolls on subfloors levelled with cement-based Wakol levelling compound and primed with WAKOL D 3040 Primer Concentrate, diluted with water, or WAKOL D 3035 Dispersion Primer. Also suitable for laying modular textile floor coverings (without multiple restarts), using the contact method, WAKOL D 3330 LVT Flooring Adhesive is also suitable for laying PVC soft skirting and in stair areas, for PVC flooring on steps and risers.

Application method:
special roller, enclosed

Consumption:
approx. 120-140 g/m²

Airing time:
approx. 20-30 minutes

Open time:
approx. 180 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
333004 - 10.0 kg - pallet: 24 pieces
333006 - 3.0 kg - pallet: 60 pieces

WAKOL D 3320 PVC Adhesive



Area of application:
Dispersion adhesive for laying LVT flooring, caoutchouc flooring up to 4 mm layer thickness, textile flooring with PVC, PUR or latex fittings on absorbent subfloors, homogeneous PVC flooring in sheets and tiles and CV flooring on all absorbent and non-absorbent subfloors indoors. WAKOL D 3320 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A1, A2 or B1

Consumption:
approx. 250-450 g/m²

Airing time:
approx. 5-20 minutes on absorbent subfloors, approx. 30-40 minutes on non-absorbent subfloors

Open time:
approx. 30-50 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
332003 - 12.0 kg - pallet: 44 pieces

WAKOL D 3319 LVT Flooring Adhesive, fibre-containing



Area of application:
Fibre-reinforced, dispersion-based wet-bed adhesive for laying LVT flooring in planks and tiles, homogeneous and heterogeneous PVC flooring in planks and tiles as well as CV flooring on absorbent subfloors indoors. WAKOL D 3319 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2

Consumption:
approx. 250-300 g/m²

Airing time:
approx. 5-10 minutes

Open time:
approx. 10-20 minutes

Storage:
not below +5 °C; sensitive to frost

Base:
acrylate dispersion

Order information:
331902 - 13.0 kg - pallet: 44 pieces

WAKOL D 3318 MultiFlex, fibre-containing



Area of application:
Fibre-reinforced, dispersion-based wet-bed adhesive for laying homogeneous and heterogeneous PVC flooring, especially LVT flooring, CV flooring as well as linoleum, caoutchouc flooring and caoutchouc napped flooring up to 4 mm layer thickness on absorbent subfloors indoors. WAKOL D 3318 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2 or B1

Consumption:
approx. 290-350 g/m²

Airing time:
approx. 5-10 minutes

Open time:
approx. 10 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
331803 - 13.0 kg - pallet: 44 peices
331805 - 6.0 kg - pallet: 90 pieces

WAKOL D 3317 PVC Adhesive, fibre-containing



Area of application:
Fibre-reinforced dispersion based adhesive for laying LVT flooring in planks and tiles, homogeneous and heterogeneous PVC flooring in rolls and tiles as well as CV flooring on absorbent subfloors indoors. WAKOL D 3317 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2

Consumption:
approx. 300-330 g/m²

Airing time:
approx. 5-15 minutes

Open time:
approx. 10-25 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
331702 - 14.0 kg - pallet: 44 pieces

WAKOL D 3307 PVC Adhesive



Area of application:
Dispersion adhesive for laying homogeneous PVC floorings in planks and tiles, LVT flooring, CV flooring, textile flooring with fleece, TR, jute and latex foam backing as well as woven textile flooring on absorbent subfloors indoors. WAKOL D 3307 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2, B1 or B2

Consumption:
approx. 330-530 g/m²

Airing time:
approx. 10-20 minutes

Open time:
approx. 15-20 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
330703 - 14.0 kg - pallet: 44 pieces
330705 - 6.0 kg - pallet: 90 pieces
330706 - 3.0 kg - pallet: 150 pieces

WAKOL D 3240 Colleo



Area of application:
Dispersion adhesive for laying linoleum, textile flooring with fleece backing, synthetic double backing, latex foam backing or jute backing, woven textile flooring and needle fleece flooring as well as for homogeneous PVC and CV flooring on absorbent subfloors. WAKOL D 3240 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2, B1 or B2

Consumption:
approx. 300-525 g/m²

Airing time:
approx. 5-10 minutes

Open time:
approx. 10-15 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
324004 - 14.0 kg - pallet: 33 pieces

WAKOL D 3125 LVT Flooring Adhesive



Area of application:
Dispersion based adhesive for laying LVT flooring, homogeneous and heterogeneous PVC flooring in planks and tiles, CV flooring on absorbent and non-absorbent subfloors. WAKOL DL 3125 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A1

Consumption:
approx. 190-220 g/m² with TKB A1

Airing time:
approx. 30 minutes on absorbent subfloors, approx. 60 minutes on non-absorbent subfloors

Open time:
approx. 180 minutes

Storage:
not below +5 °C; sensitive to frost

Base:
acrylate dispersion

Order information:
312503 - 10.0 kg - pallet: 44 pieces

WAKOL MS 245 Montinator



Area of application:
Solvent-free, single-component, elastic MS mounting adhesive for bonding wood materials, metals, plastics, concrete, stone, decorative sheets, wall panelling, panels and wood borders. Can be painted over.

Application method:
cartridge injection

Airing time:
none

Open time:
approx. 5-10 minutes

Hardening time:
up to 2.5 mm layer after 24 hours

Temperature resistant:
-40 °C to +90 °C

Storage:
store in a cool and dry place, not sensitive to frost

Base:
MS polymer

Order information:
362505 - 310 ml - pallet: 1.152 pieces; 96 boxes with 12 pieces each

WAKOL D 3410 Kontakto



Area of application:

Dispersion adhesive for laying textile flooring such as tufting, woven flooring and needle fleece flooring, homogeneous and heterogeneous PVC flooring, PVC soft skirting, stair profiles, hollow neck plith profiles, CV, linoleum and caoutchouc flooring as well as deflectors with contact method on absorbent and non-absorbent subfloors. WAKOL D 3410 Kontakto corresponds to DIN EN 14259.

Application method:

short-haired velour roller, brush or trowel notch size according to TKB A1

Consumption:

ca. 250-500 g/m²

Airing time:

approx. 30 - 60 minutes depending on the absorbency of the subfloor, approx. 180 minutes for heavily structured textile flooring, preferably overnight. Flooring can be pre-coated up to 24 hours before laying.

Open time:

approx. 120 minutes, or 90 minutes for pre-coated flooring

Storage:

not below +5 °C, sensitive to frost

Base:

polychloroprene

Order information:

341004 - 0.8 kg - pallet: 288 pieces; 24 boxes with 12 pieces each
341007 - 2.5 kg - pallet: 120 pieces

WAKOL NE 479 Contact Adhesive



Area of application:

Neoprene adhesive for laying skirting boards as well as textile, homogeneous PVC, caoutchouc, natural cork and linoleum flooring on stairs on absorbent and non-absorbent subfloors.

Application method:

on both sides with brush, smooth spatula or trowel notch size according to TKB A1

Consumption:

approx. 200-300 g/m²

Airing time:

approx. 15 minutes

Open time:

approx. 50 minutes

Storage:

not below +5 °C, sensitive to frost

Base:

polychloroprene

Order information:

147926 - 6.0 kg - pallet: 60 pieces
147924 - 10 pieces - 0.65 kg each - pallet: 500 pieces; 50 boxes with 12 pieces each

WAKOL NE 470 Contact Adhesive



Area of application:

Neoprene adhesive for laying skirting boards, edges of staircases and laying staircases with textile flooring, homogeneous PVC coverings, rubber floor coverings, linoleum flooring, natural cork coverings on absorbent and non-absorbent subfloors indoors.

Application method:

both sides with brush, both sides with smooth spatula or trowel notch size according to TKB A1

Consumption:

approx. 200-350 g/m²

Airing time:

approx. 15-20 minutes

Open time:

approx. 30 minutes

Storage:

not below +5 °C; sensitive to frost

Base:

polychloroprene

Order information:

147007 - 6.0 kg - pallet: 60 pieces

WAKOL DL 3365 StarLeit



Area of application:

Light-coloured, fibre-containing dispersion adhesive for the laying of conductive PVC, textile and linoleum flooring as well as for conductive caoutchouc flooring of thickness up to 4 mm on appropriately prepared subfloors. WAKOL DL 3365 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB S2, Pajarito 7 or Pajarito 25; trowel notch enclosed

Consumption:

approx. 250-550 g/m²

Airing time:

approx. 10-15 minutes

Open time:

approx. 20-40 minutes

Storage:

not below +5 °C, sensitive to frost

Base:

acrylate dispersion

Order information:

336504 - 12.0 kg - pallet: 40 pieces

WAKOL D 3360 VersaTack



Area of application:

Dispersion adhesive for laying linoleum, caoutchouc flooring up to 2.5 mm layer thickness, textile flooring with fleece backing, latex foam backing, synthetic double backing or jute backing, woven textile flooring and needle fleece flooring on absorbent subfloors as well as for PVC and CV flooring on absorbent and non-absorbent subfloors. WAKOL D 3360 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB A1, A2, B1 or B2

Consumption:

approx. 250-550 g/m²

Airing time:

approx. 10-20 minutes

Open time:

approx. 20-30 minutes

Storage:

not below +5°C, sensitive to frost

Base:

acrylate dispersion

Order information:

336002 - 14.0 kg - pallet: 44 pieces
336004 - 6.0 kg - pallet: 90 pieces

WAKOL D 3318 MultiFlex, fibre-containing



Area of application:

Fibre-reinforced, dispersion-based wet-bed adhesive for laying homogeneous and heterogeneous PVC flooring, especially LVT flooring, CV flooring as well as linoleum, caoutchouc flooring and caoutchouc napped flooring up to 4 mm layer thickness on absorbent subfloors indoors. WAKOL D 3318 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB A2 or B1

Consumption:

approx. 290-350 g/m²

Airing time:

approx. 5-10 minutes

Open time:

approx. 10 minutes

Storage:

not below +5 °C, sensitive to frost

Base:

acrylate dispersion

Order information:

331803 - 13.0 kg - pallet: 44 peices
331805 - 6.0 kg - pallet: 90 pieces

WAKOL D 3312 Carpet Adhesive



Area of application:

High shear-resistant dispersion adhesive for laying needle fleece flooring, textile flooring with fleece, synthetic double or jute backing as well as woven flooring on absorbent subfloors. WAKOL D 3312 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB B1 or B2

Consumption:

approx. 400-525 g/m²

Airing time:

approx. 5-15 minutes

Open time:

approx. 15 minutes

Storage:

not below +5 °C; sensitive to frost

Base:

acrylate dispersion

Order information:

331203 - 14.0 kg - pallet: 44 pieces

WAKOL D 3311 Linoleum and Carpet Adhesive



Area of application:
Dispersion adhesive for laying linoleum flooring, korkment flooring, tufting flooring with matted backing, synthetic second backing or jute backing, woven flooring and needle fleece flooring on absorbent subfloors indoors. WAKOL D 3311 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB B1 or B2

Consumption:
approx. 325-450 g/m²

Airing time:
approx. 0-10 minutes

Open time:
approx. 15 minutes

Storage:
not below +5 °C; sensitive to frost

Base:
acrylate dispersion

Order information:
331102 - 14.0 kg - pallet: 44 pieces

WAKOL D 3310 Carpet Adhesive



Area of application:
Dispersion adhesive for laying textile flooring with fleece, TR, jute and latex foam backing, woven flooring, needle fleece flooring and Wakol Footfall Soundproofing Mats on absorbent subfloors. Odour-neutral after coat is fully dry. WAKOL D 3310 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2, B1 or B2

Consumption:
approx. 300-525 g/m²

Airing time:
approx. 5-10 minutes

Open time:
approx. 10-15 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
331002 - 14.0 kg - pallet: 44 pieces

WAKOL D 3308 Carpet Adhesive



Area of application:
Dispersion adhesive for laying textile flooring with fleece, TR, jute and latex foam backing, woven flooring, needle fleece flooring and PVC/CV flooring with fleece backing on absorbent subfloors. WAKOL D 3308 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB A2, B1 or B2

Consumption:
approx. 300-525 g/m²

Airing time:
approx. 5-10 minutes

Open time:
approx. 10-15 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
330807 - 14.0 kg - pallet: 44 pieces

WAKOL D 3306 Carpet Adhesive



Area of application:
Dispersion adhesive for laying textile flooring with fleece, synthetic double or latex foam backing, woven flooring, needle fleece flooring as well as Fabromont twined yarn® on absorbent subfloors. WAKOL D 3306 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB B1 or B2

Consumption:
approx. 400-525 g/m²

Airing time:
approx. 5-10 minutes depending on trowel notch size, substrate and coating

Open time:
approx. 10-15 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
330603 - 14.0 kg - pallet: 44 pieces

WAKOL D 3304 Linoleum Adhesive



Area of application:

Dispersion adhesive for laying linoleum and cork flooring, tufting flooring with fleece, synthetic double or jute backing as well as woven flooring and needle fleece flooring on absorbent subfloors. WAKOL D 3304 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB B1 or B2

Consumption:

approx. 375-500 g/m²

Airing time:

approx. 0-5 minutes

Open time:

approx. 15 minutes

Storage:

not below +5 °C, sensitive to frost

Base:

acrylate dispersion

Order information:

330404 - 14.0 kg - pallet: 44 pieces

WAKOL D 3270 SpaltTex



Area of application:

Dispersion-based adhesive for renovation with "built-in zipper" for laying textile flooring with fleece, synthetic double or latex foam backing or Fabromont twined yarn® on absorbent subfloors. Flooring can be easily removed without residue. WAKOL D 3270 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB B1 or B2

Consumption:

approx. 250-400 g/m²

Airing time:

approx. 5-10 minutes

Open time:

approx. 15 minutes

Storage:

not below +5 °C, sensitive to frost

Base:

acrylate dispersion

Order information:

327002 - 10.0 kg - pallet: 44 pieces
327004 - 4.0 kg - pallet: 90 pieces

WAKOL D 3240 Colleo



Area of application:

Dispersion adhesive for laying linoleum, textile flooring with fleece backing, synthetic double backing, latex foam backing or jute backing, woven textile flooring and needle fleece flooring as well as for homogeneous PVC and CV flooring on absorbent subfloors. WAKOL D 3240 corresponds to DIN EN 14259.

Application method:

trowel notch size according to TKB A2, B1 or B2

Consumption:

approx. 300-525 g/m²

Airing time:

approx. 5-10 minutes

Open time:

approx. 10-15 minutes

Storage:

not below +5 °C, sensitive to frost

Base:

acrylate dispersion

Order information:

324004 - 14.0 kg - pallet: 33 pieces

WAKOL D 3410 Kontakto



Area of application:

Dispersion adhesive for laying textile flooring such as tufting, woven flooring and needle fleece flooring, homogeneous and heterogeneous PVC flooring, PVC soft skirting, stair profiles, hollow neck plith profiles, CV, linoleum and caoutchouc flooring as well as deflectors with contact method on absorbent and non-absorbent subfloors. WAKOL D 3410 Kontakto corresponds to DIN EN 14259.

Application method:

short-haired velour roller, brush or trowel notch size according to TKB A1

Consumption:

ca. 250-500 g/m²

Airing time:

approx. 30 - 60 minutes depending on the absorbency of the subfloor, approx. 180 minutes for heavily structured textile flooring, preferably overnight. Flooring can be pre-coated up to 24 hours before laying.

Open time:

approx. 120 minutes, or 90 minutes for pre-coated flooring

Storage:

not below +5 °C, sensitive to frost

Base:

polychloroprene

Order information:

341004 - 0.8 kg - pallet: 288 pieces; 24 boxes with 12 pieces each
341007 - 2.5 kg - pallet: 120 pieces

WAKOL PU 272 Artificial Turf Adhesive



Area of application:
2-component, green coloured PU adhesive for laying artificial turf on polyester seam tape, on absorbant and non-absorbent subfloors as well as moist, but superficially dried, drainable subfloors outdoors.

Application method:
trowel notch size according to TKB B3

Consumption:
approx. 850-1050 g/m²

Airing time:
none

Open time:
approx. 90 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
polyurethane resin

Order information:
368812 - 12.0 kg A-comp. - pallet: 44 pieces
369412 - 1.12 kg B-Comp. - pallet: 440 pieces; 40 boxes with 11 pieces each

WAKOL MS 292 Parquet Adhesive



Area of application:
Structure viscous 1-component MS parquet adhesive for the shear-resistant laying of mosaic, on edge lamella, 10 mm solid wood lam parquet, strip, multi-layer parquet, solid wood planks as well as cork flooring with HDF/MDF middle layer with tongue and groove resp. click-connection on absorbent and non-absorbent subfloors indoors. WAKOL MS 292 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15, WAKOL Applicator 90 and WAKOL Replaceable Nozzle

Consumption:
approx. 550-725 ml/m² with WAKOL Replaceable Nozzle, approx. 500-950 ml/m² with WAKOL Parquet Notched Trowel

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place; not sensitive to frost

Base:
MS-Polymer

Order information:
363403 - 4.200 ml (Ø88 mm) - pallet: 108 pieces; 54 boxes with 2 pieces each

WAKOL MS 290 Parquet Adhesive



Area of application:
1-component MS parquet adhesive for the shear-resistant laying of mosaic, on edge lamella, 10 mm solid wood lam parquet, strip, multi-layer parquet, solid planks, wood block RE/WE as well as flat-lying cork flooring and cork flooring with HDF/MDF middle layer and cork stabilizing layer on absorbent and non-absorbent subfloors indoors. WAKOL MS 290 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13, B15 (parquet), A2 (cork)

Consumption:
approx. 400-450 g/m² cork approx. 800-1500 g/m² parquet

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place, not sensitive to frost

Base:
MS polymer

Order information:
363707 - 18.0 kg sealed - pallet: 44 pieces

WAKOL MS 262 Parquet Adhesive, firm-elastic



Area of application:
Firm-elastic, structure viscous 1-component MS parquet adhesive for laying mosaic, on edge lamella (min. 16 mm thick, max. 200 mm long), strip, multi-layer parquet, solid wood planks (up to 18 cm in width, oak up to 20 cm wide) as well as cork flooring with HDF/MDF middle layer with tongue and groove resp. click-connection on absorbent and non-absorbent wall and floor areas indoors. WAKOL MS 262 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15, tubular bag gun, e.g. WAKOL Applicator 90 or 50 and special application nozzle or WAKOL Replaceable Nozzles

Consumption:
approx. 450-500 ml/m² combining WAKOL TS 160/TS 170; approx. 600-800 ml/m² strip application, approx. 500-950 ml/m² with WAKOL Parquet Notched Trowel; approx. 425-850 ml/m² WAKOL Replaceable Nozzles

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place; not sensitive to frost

Base:
MS-Polymer

Order information:
363210 - 18.0 kg sealed - pallet: 44 pieces
363205 - 4.200 ml (Ø88 mm) - pallet: 108 pieces; 54 boxes with 2 pieces each
363206 - 1.800 ml (Ø62 mm) - pallet: 216 pieces; 36 boxes with 6 pieces each
363207 - 600 ml (Ø49 mm) - pallet: 864 pieces; 72 boxes with 12 pieces each

WAKOL MS 260 Parquet Adhesive, firm-elastic



Area of application:
Firm-elastic 1-component MS parquet adhesive for laying mosaic, on edge lamella (min. 16 mm in width, max. 200 mm in length), strip, 10 mm solid wood lam parquet, multi-layer parquet, solid planks (up to max. 18 cm in width, type of wood oak up to max. 20 cm in width), wood block RE/WE as well as flatlying cork flooring and cork flooring with HDF/MDF middle layer and cork stabilizing layer on absorbent and non-absorbent subfloors indoors. WAKOL MS 260 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15 (parquet), A2 (cork), WAKOL Speciality Trowel 5, WAKOL Speciality Trowel Blade 5

Consumption:
approx. 700-1500 g/m² parquet approx. 400-450 g/m² cork approx. 1700-1800 g/m² with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place, not sensitive to frost

Base:
MS polymer

Order information:
362007 - 18.0 kg sealed - pallet: 44 pieces

WAKOL MS 232 Parquet Adhesive, elastic



Area of application:
Elastic, structure viscous 1-component MS parquet adhesive for laying of on edge lamella parquet (min. 22 mm thick, max. 200 mm long), strip parquet (22 mm, type of wook oak) and multi-layer parquet on absorbent and non-absorbent subfloors indoors. WAKOL MS 232 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11 or B13, WAKOL Applicator 90 and WAKOL Replaceable Nozzle

Consumption:
approx. 550-725 ml/m² with WAKOL Replaceable Nozzle, approx. 500-800 ml/m² with WAKOL Parquet Notched Trowel

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place, not sensitive to frost

Base:
MS-Polymer

Order information:
363303 - 4.200 ml (Ø88 mm) - pallet: 108 pieces; 54 pieces with 2 pieces each
363304 - 1.800 ml (Ø62 mm) - pallet: 216 pieces; 36 boxes with 6 pieces each
363305 - 600 ml (Ø49 mm) - pallet: 864 pieces; 72 boxes with 12 pieces each

WAKOL MS 230 Parquet Adhesive, elastic



Area of application:
Elastic 1-component MS parquet adhesive for laying mosaic, on edge lamella parquet (min. 16 mm in width, max. 200 mm in length), strip flooring parquet (max. 80 mm in width, max. 600 mm in length), as well as multi-layered parquet on absorbent and non-absorbent subfloors indoors. WAKOL MS 230 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15, WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5

Consumption:
approx. 700-1300 g/m² with trowel notch, approx. 1700-1800 g/m² with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place, not sensitive to frost

Base:
MS polymer

Order information:
363507 - 18.0 kg sealed - pallet: 44 pieces

WAKOL MS 228 Ready-to-lay Parquet Adhesive, elastic



Area of application:
Elastic 1-component MS parquet adhesive for laying on multi-layer parquet on absorbent and non-absorbent subfloors. WAKOL MS 228 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15; WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5

Consumption:
approx. 800-1500 g/m² with trowel notch, approx. 1700-1800 g/m² with WAKOL Speciality Trowel 5 or WAKOL Speciality Trowel Blade 5

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool and dry place; not sensitive to frost

Base:
MS polymer

Order information:
362803 - 18.0 kg sealed - pallet: 44 pieces

WAKOL PU 385 Parquet Adhesive



Area of application:
Shear-resistant, 1-component PU parquet adhesive for laying of on edge lamella parquet (min. 22 mm in width), strip and multi-layer parquet, solid wood planks, wood block RE/WE as well as cork flooring with HDF/MDF middle layer and cork stabilizing layer on absorbent and non-absorbent subfloors. WAKOL PU 385 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 750-1450 g/m²

Airing time:
none

Open time:
approx. 40 minutes

Storage:
store in a cool place, not sensitive to frost

Base:
polyurethane resin

Order information:
367102 - 16.0 kg sealed - pallet: 44 pieces

WAKOL PU 225 Parquet Adhesive



Area of application:
Shear-resistant, 2-component PU parquet adhesive for laying of mosaic, on edge lamella, strip, multi-layer and 10 mm solid wood lam parquet, solid wood planks, wood block RE/WE as well as for approved stratified flooring on absorbent and non-absorbent subfloors. WAKOL PU 225 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 700-1500 g/m²

Airing time:
none

Open time:
approx. 50 minutes

Pot life:
approx. 35-40 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
polyurethane resin

Order information:
368603 - 8.9 kg A-Comp. - pallet: 44 pieces
368703 - 1.1 kg B-Comp. - pallet: 440 pieces; 40 boxes with 11 pieces each
368604 - 6.0 kg A-comp. - pallet: 44 pieces combination pack A+B
368704 - 0.75 kg B-comp. - pallet: 44 pieces combination pack A+B

WAKOL PU 220 Parquet Adhesive



Area of application:
Shear-resistant, 2-component PU parquet adhesive for laying of 10 mm solid wood lam parquet flooring, mosaic parquet, on-edge lamella parquet, strip parquet, multi-layer parquet, solid wood planks, wood-block RE/WE on absorbent and non-absorbent subfloors indoors. WAKOL PU 220 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 750-1500 g/m²

Airing time:
none

Open time:
approx. 130 minutes

Pot life:
approx. 100 minutes

Storage:
not below +5°C, sensitive to frost

Base:
polyurethane resin

Order information:
368105 - 12.0 kg A-comp. - pallet: 44 pieces
368905 - 1.12 kg B-comp. - pallet: 440 pieces; 40 boxes with 11 pieces each

WAKOL PU 215 Parquet Adhesive



Area of application:
Shear-resistant, 2-component PU parquet adhesive for laying of 10 mm solid wood lam parquet flooring, mosaic parquet, on edge lamella parquet, strip parquet, multi-layer parquet, solid wood planks, wood-block RE/WE on absorbent and non-absorbent subfloors indoors. WAKOL PU 215 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 750-1550 g/m²

Airing time:
none

Open time:
approx. 90 minutes

Pot life:
approx. 80 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
polyurethane resin

Order information:
368803 - 12.0 kg A-comp. - pallet: 44 pieces
368403 - 1.12 kg B-comp. - pallet: 440 pieces; 40 boxes with 11 pieces each
368804 - 8.0 kg A-comp. - pallet: 60 pieces
368404 - 0.75 kg B-comp. - pallet: 60 pieces; 5 boxes with 12 pieces each

WAKOL PU 210 Parquet Adhesive



Area of application:
Shear-resistant, 2-component PU parquet adhesive for laying of mosaic, on edge lamella, strip, multi-layer and 10 mm solid wood lam parquet, solid wood planks, wood block RE/WE as well as for approved stratifie flooring on absorbent and non-absorbent subfloors. WAKOL PU 210 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 700-1500 g/m²

Airing time:
none

Open time:
approx. 60-90 minutes

Pot life:
approx. 60-70 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
polyurethane resin

Order information:
368332 - 6.0 kg A-comp. - pallet: 60 pieces combination pack A+B
368432 - 0.9 kg B-comp. - pallet: 60 pieces combination pack A+B

WAKOL D 6085 Wood Glue



Area of application:
Wood glue for all heavy-duty requirements such as mortise, dowel and joint gluing. WAKOL D 6085 is especially suited for the tongue and groove engineered flooring gluing of ready-to-lay parquet, flooring stratifie and chipboard. WAKOL D 6085 corresponds to load class D 3.

Application method:
for surface bonding with notched trowel for matchboard gluing with sprayer nozzle of the glue bottle

Consumption:
approx. 150-200 g/m², with Wood Glue bottle approx. 15-20 g/running meter for matchboard gluing

Airing time:
none

Open time:
approx. 6 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
synthetic resin dispersion

Order information:
316306 - 10.0 kg - pallet: 44 pieces
316307 - 0.75 kg - pallet: 480 pieces; 40 boxes with 12 pieces each

WAKOL D 3513 Cork Pre-Coating



Area of application:
Latex adhesive for machine-operated pre-coating of natural cork flooring that is to be laid by contact procedure. WAKOL D 3513 may be used only in combination with WAKOL D 3540 Cork Contact Adhesive. Pre-coating is possible up to 6 months prior to laying.

Application method:
roller application with suitable machine on the back of the floor covering

Consumption:
approx. 80-100 g/m²

Airing time:
approx. 60 minutes

Open time:
approx. 60-90 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
natural latex

Order information:
351309 - 10.0 kg - pallet: 60 pieces

WAKOL D 3540 Cork Contact Adhesive



Area of application:
Latex adhesive for laying cork tiles according to DIN EN 12104 with non-treated or treated surface on absorbent and non-absorbent subfloors. Also suitable for cork wall coverings and laying carpets on steps. WAKOL D 3540 corresponds to DIN EN 14259.

Application method:
WAKOL Primer Roller or velours roller on cork wall coverings, for carpet floorings with brush or trowel notch size according to TKB A1, A2 or A3

Consumption:
minimum 250 g/m² for laying cork, otherwise 150-650 g/m²

Airing time:
approx. 30-45 minutes on absorbent subfloors, approx. 60-90 minutes on non-absorbent subfloors and on the back of the floor covering

Open time:
approx. 120-180 minutes, with pre-coating approx. 60-90 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
latex/acrylate dispersion

Order information:
354008 - 5.0 kg - pallet: 80 pieces
354009 - 2.5 kg - pallet: 120 pieces
354010 - 0.8 kg - pallet: 384 pieces; 32 boxes with 12 pieces each

WAKOL D 1640 Parquet Adhesive



Area of application:
Shear-resistant dispersion parquet adhesive for laying of mosaic, on edge lamella parquet (min. 16 mm in width, max. 200 mm in length) and strip parquet in oak as well as multi-layer parquet up to 220 cm length on new, good absorbent cement screeds which are in accordance with the standard. WAKOL D 1640 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B11, B13 or B15

Consumption:
approx. 700-1300 g/m²

Airing time:
none

Open time:
approx. 10-15 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
synthetic resin dispersion

Order information:
321704 - 14.0 kg - pallet: 44 pieces

WAKOL D 1690 Parquet Adhesive



Area of application:
Shear-resistant dispersion parquet adhesive for laying of mosaic, on edge lamella parquet (min. 16 mm in width, max. 200 mm in length) and strip parquet in oak as well as multi-layer parquet on absorbent subfloors. WAKOL D 1690 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3 or B11

Consumption:
approx. 700-1100 g/m²

Airing time:
none

Open time:
approx. 15 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
synthetic resin dispersion

Order information:
322203 - 14,0 kg - pallet: 44 pieces

WAKOL K 450 Solid Parquet Adhesive



Area of application:
Synthetic resin adhesive for the shear-resistant laying of mosaic, strip, on edge lamella and multi-layer parquets and wood block RE/WE on absorbent subfloors. WAKOL K 450 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 800-1300 g/m²

Airing time:
none

Open time:
approx. 10 minutes

Storage:
store in a cool place, not sensitive to frost

Base:
synthetic resin

Order information:
192311 - 20.0 kg - pallet: 33 pieces

WAKOL K 410 Parquet Adhesive with VOC Control



Area of application:
Synthetic resin adhesive for the shear-resistant laying of mosaic, on edge lamella (min. 16 mm in width, max. 200 mm in length), strip, multi-layer and 10 mm solid wood lam parquet, solid wood planks, wood block RE/WE on absorbent and non-absorbent subfloors. WAKOL K 410 corresponds to DIN EN 14293.

Application method:
trowel notch size according to TKB B3, B5, B11, B13 or B15

Consumption:
approx. 700-1400 g/m²

Airing time:
none

Open time:
at least 50 minutes, since VOC Control technology used

Storage:
store in a cool place, not sensitive to frost

Base:
synthetic resin

Order information:
193303 - 20.0 kg - pallet: 33 pieces

WAKOL MS 335 Repair Resin



Area of application:
Fast-curing, silane modified repair resin for restoring hollow spots in parquet floors. WAKOL MS 335 Repair Resin can be applied independently from the used parquet adhesive.

Hardening time:
approx. 2 hours

Storage:
store in a cool and dry place; not sensitive to frost

Base:
MS polymer

Order information:
361503 - 0.6 kg - pallet: 308 pieces; 77 boxes with 4 pieces each

WAKOL PU 4519 2K-PU Accelerator



Area of application:
Accelerator for increasing the reaction speed of two-component polyurethane parquet adhesives.

Dosage:
1-3 caps of 15 ml depending on the product and the required acceleration

Storage:
store in a cool and dry place, not sensitive to frost

Base:
polyurethane catalyst

Order information:
451906 - 0.9 kg - pallet: 320 pieces

WAKOL PK 4535 Colour Paste, brown



Area of application:
Brown colour paste to stain all kind of Wakol MS-parquet adhesives, Wakol polyurethane adhesives and Wakol dispersion adhesives.

Dosage:
1-2 tubes per packaging Wakol parquet adhesive

Storage:
not below +5 °C, sensitive to frost

Base:
pigment concentrate

Order information:
453505 - 0.15 kg (brown) - pallet: 1.950 pieces; 195 boxes with 10 pieces each

WAKOL D 3202 Universal Fixation



Area of application:
Dispersion-based fixation for laying CV flooring as well as textile flooring with latex foam backing or synthetic double backing on existing floor coverings, levelled concrete subfloors and P4 to P7 chipboard. Fixed covering can be removed again without damage to the subfloors.

Application method:
trowel notch size according to TKB A2, WAKOL Primer Roller or velour roller

Consumption:
approx. 200-300 g/m²

Airing time:
approx. 10-20 minutes on absorbent subfloors, approx. 45-60 minutes on non-absorbent subfloors

Open time:
approx. 20-30 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
320203 - 12.0 kg - pallet: 40 pieces
320204 - 6.0 kg - pallet: 80 pieces
320205 - 3.0 kg - pallet: 120 pieces

WAKOL D 3201 VliesFix



Area of application:
Dispersion-based fixation for laying dimensionally stable textile flooring with fleece backing and approved by the manufacturer for fixation, on smooth, existing floor coverings, levelled subfloors and P4 to P7 chipboard in living areas. Fixed covering can be easily removed without damage to the subfloors.

Application method:
WAKOL Primer Roller or velour roller

Consumption:
approx. 120 g/m²

Airing time:
approx. 10-15 minutes on absorbent subfloors, approx. 20-30 minutes on dense subfloors

Open time:
approx. 30 minutes

Storage:
not below +5 °C; sensitive to frost

Base:
acrylate dispersion

Order information:
320103 - 12.0 kg - pallet: 40 pieces
320104 - 6.0 kg - pallet: 80 pieces
320105 - 3.0 kg - pallet: 120 pieces

WAKOL D 3110 Modular Flooring Fixation



Area of application:
Dispersion-based fixation for laying modular textile flooring, self-laying PVC design flooring and CV flooring without multiple restarts on absorbent and non-absorbent subfloors.

Application method:
with shorthaired velour roller

Consumption:
approx. 80-120 g/m² with roller

Airing time:
approx. 20 minutes on absorbent subfloors, approx. 35 minutes on non-absorbent subfloors

Open time:
approx. 24 hours

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
311003 - 11.0 kg - pallet: 40 pieces

WAKOL D 965 Tackifier Dispersion



Area of application:
Tackifier dispersion for anti-slip laying of self-laying carpet tiles with bitumen/fleece, PVC or PUR backing on absorbent and non-absorbent subfloors and for reinforcing of WAKOL AR 150 Reinforcement Fabric. For conductive laying, mix WAKOL D 965 with WAKOL DL 352 Conductive Dispersion in a ratio of 4 :1.

Application method:
WAKOL Primer Roller, foam or velour roller

Consumption:
approx. 80-150 g/m²

Airing time:
approx. 30-60 minutes

Open time:
approx. 24 hours

Storage:
not below +5 °C, sensitive to frost

Base:
synthetic resin dispersion

Order information:
310203 - 10.0 kg - pallet: 40 pieces

WAKOL DL 3078 Conductive Primer



Area of application:
Ready-to-use conductive dispersion-based primer for subsequent conductive laying of textile and elastic floorings. WAKOL DL 3078 replaces the laying of a copper band net.

Application method:
finely porous foam roller

Consumption:
approx. 120-150 g/m²

Drying time:
approx. 3-5 hours

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
307803 - 10.0 kg - pallet: 60 pieces

WAKOL DL 3365 StarLeit



Area of application:
Light-coloured, fibre-containing dispersion adhesive for the laying of conductive PVC, textile and linoleum flooring as well as for conductive caoutchouc flooring of thickness up to 4 mm on appropriately prepared subfloors. WAKOL DL 3365 corresponds to DIN EN 14259.

Application method:
trowel notch size according to TKB S2, Pajarito 7 or Pajarito 25; trowel notch enclosed

Consumption:
approx. 250-550 g/m²

Airing time:
approx. 10-15 minutes

Open time:
approx. 20-40 minutes

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Order information:
336504 - 12.0 kg - pallet: 40 pieces

WAKOL D 965 Tackifier Dispersion



Area of application:
Tackifier dispersion for anti-slip laying of self-laying carpet tiles with bitumen/fleece, PVC or PUR backing on absorbent and non-absorbent subfloors and for reinforcing of WAKOL AR 150 Reinforcement Fabric. For conductive laying, mix WAKOL D 965 with WAKOL DL 352 Conductive Dispersion in a ratio of 4 :1.

Application method:
WAKOL Primer Roller, foam or velour roller

Consumption:
approx. 80-150 g/m²

Airing time:
approx. 30-60 minutes

Open time:
approx. 24 hours

Storage:
not below +5 °C, sensitive to frost

Base:
synthetic resin dispersion

Order information:
310203 - 10.0 kg - pallet: 40 pieces

WAKOL DL 352 Conductive Dispersion



Area of application:
Conductive dispersion in combination with WAKOL D 965 Tackifier Dispersion for producing a conductive slip brake for appropriately equipped carpet tiles.

Mixture:
4 parts WAKOL D 965 + 1 part WAKOL DL 352


Usage:
only in combination with WAKOL D 965

Storage:
not below +5 °C, sensitive to frost

Base:
special carbon black

Order information:
450102 - 5.0 kg - pallet: 60 pieces

WAKOL AR 150 Reinforcement Fabric

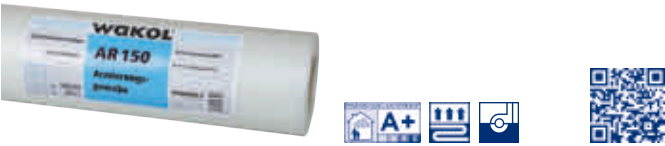

Area of application:
Fibreglass fabric for reinforcing levelling compounds on inhomogeneous subfloors, wood planks and wood product tile subfloors as well as in sports facility construction in systems with WAKOL D 3060 Plastification Additive and Wakol levelling compound.

Laying:
overlapping sheets, fixed on the subfloor

Consumption:
corresponding to the room size

Storage:
store roll upright

Base:
fibre glass fabric

Order information:
595502 - Roll 50 m, 1 m wide - pallet: 30 pieces

WAKOL AS 151 Sealing Sheet



Area of application:
System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
corresponding to the room size

Storage:
store roll upright

Base:
polypropylene fleece

Order information:
595602 - Roll 20 m, 1 m wide, 0,5 mm thick - pallet: 20 pieces; 20 boxes with 1 piece each

WAKOL AS 152 Sealing Tape



Area of application:
System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

Laying:
completely cover, in the system with WAKOL AS 151


Consumption:
corresponding to the room size

Storage:
not sensitive to frost

Base:
polypropylene fleece

Order information:
595603 - Roll 50 m, 120 mm wide - pallet: 20 pieces; 20 boxes with 1 piece each

WAKOL AS 153 Sealing Corners, inner

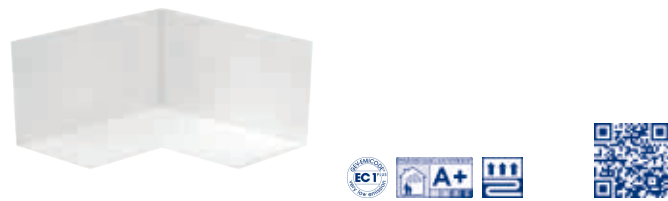

Area of application:
System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

Laying:
completely cover, in the system with WAKOL AS 151


Consumption:
1 pc. per inner corner

Storage:
not sensitive to frost

Base:
polypropylene fleece

Order information:
595604 - 5 pieces - each 119 x 119 x 60 mm - pallet: 2.000 pieces; 400 boxes with 5 pieces each

WAKOL AS 154 Sealing Corners, outer

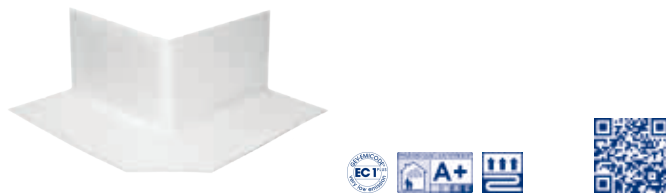

Area of application:
System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

Laying:
completely cover, in the system with WAKOL AS 151

Consumption:
1 pc. per outer corner

Storage:
not sensitive to frost

Base:
polypropylene fleece

Order information:
595605 - 5 pieces - each 115 x 115 x 60 mm - pallet: 2.000 pieces; 400 boxes with 5 pieces each

WAKOL EM 140 Uncoupling Fleece



Area of application:
Polyester fleece for decoupling and low tension reinforcement under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another


Consumption:
corresponding to the room size

Storage:
store roll upright

Base:
polyester fleece

Order information:
590302 - Roll 50 m, 1 m wide, 1,1 mm tick - pallet: 15 pieces

WAKOL RP 704 Project Decoupling Sheet, 4 mm

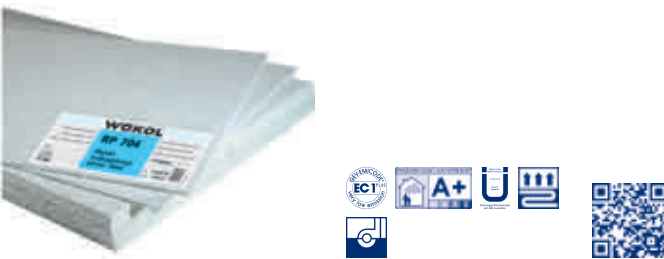

Area of application:
Polyester fibre sheet for decoupling and soundproofing reduction under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
depends on top covering, e.g. approx. 13 dB with 10 mm parquet

Storage information:
store boxes flat

Base:
polyester fibre mixture

Order information:
590474 - 15 sheets - each 100 x 60 cm, 4 mm thick - pallet: 150 pieces; 10 boxes with 15 pieces each

WAKOL RP 104 Decoupling Sheet, 4 mm



Area of application:
Polyester fibre sheet for decoupling and soundproofing reduction under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
depends on top covering, e.g. approx. 13 dB with 10 mm parquet

Storage information:
store boxes flat

Base:
polyester fibre mixture

Order information:
590402 - 15 sheets - each 100 x 60 cm, 4 mm thick - pallet: 150 pieces; 10 boxes with 15 pieces each

WAKOL RP 107 Decoupling Sheet, 7 mm



Area of application:
Polyester fibre sheet for decoupling and soundproofing reduction under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
one after the other corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
depending on the top covering, e.g. approx. 14 dB with 10 mm of parquet

Storage information:
store boxes flat

Base:
polyester fibre mixture

Order information:
590907 - 9 sheets - each 100 x 60 cm, 7 mm thick - pallet: 90 pieces; 10 boxes with 9 pieces each

WAKOL RP 109 Decoupling Sheet, 9 mm



Area of application:
Polyester fibre sheet for decoupling and soundproofing reduction under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
corresponding to the room size


Footfall sound reduction (as per DIN EN ISO 140-8):
depends on top covering, e.g. approx. 14 dB with 10 mm parquet

Storage information:
store boxes flat

Base:
polyester fibre mixture

Order information:
590502 - 10 sheets - each 100 x 60 cm, 9 mm thick - Palette: 100 Stück; 10 Kartons à 10 Stück

WAKOL RP 115 Decoupling Sheet, 15 mm

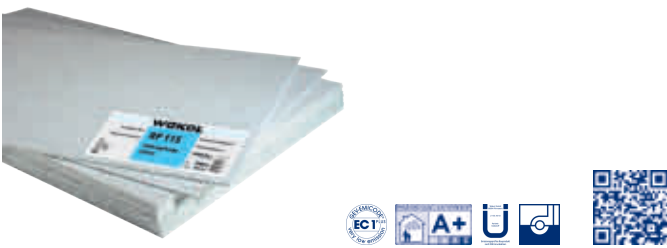

Area of application:
Polyester fibre sheet for decoupling and soundproofing reduction under bonded parquet indoors also appropriate for applying a levelling layer before bonding textile and elastic flooring.

Laying:
completely cover, with sheets closely abutting one another

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
depends on top covering, e.g. approx. 14 dB with 10 mm parquet

Storage information:
store boxes flat

Base:
polyester fibre mixture

Order information:
590802 - 6 sheets - each 100 x 60 cm, 15 mm thick - Palette: 60 Stück; 10 Kartons à 6 Stück

WAKOL TS 102 Footfall Soundproofing Mat, 2 mm



Area of application:
Cork/polyurethane foam matting for improving the footfall soundproofing and heat insulation of flooring structures in old and new buildings. WAKOL TS 102 is suitable as soundproofing material under PVC, CV, textile, linoleum and caoutchouc flooring, as well as mosaic parquet (cubes), on edge lamella, strip, multi-layer parquet, wood block RE/WE, solid wood planks (type of wood oak, max. 16 cm in width) and stratifie flooring indoors.

Laying:
completely cover, with mats closely abutting one another

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
19 dB in combination with 10 mm multi-layer parquet, 19 dB in combination with 3 mm PVC, 17 dB in combination with 3 mm rubber

Storage:
store roll upright

Base:
cork/PU-foam

Order information:
590704 - Roll 30 m, 1 m wide, 2 mm thick - pallet: 11 pieces

WAKOL TS 103 Footfall Soundproofing Mat, 3 mm



Area of application:
Cork/polyurethane foam matting for improving the footfall soundproofing and heat insulation of flooring structures in old and new buildings. WAKOL TS 103 is suitable as soundproofing material under PVC, CV, textile, linoleum and caoutchouc flooring, as well as strip, multi-layer parquet, wood block RE/WE, solid wood planks (type of wood oak, max. 16 cm in width) and stratifie flooring indoors.

Laying:
completely cover, with mats closely abutting one another

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
18 dB in combination with 10 mm multi-layer parquet, 20 dB in combination with 3 mm PVC, 17 dB in combination with 3 mm rubber

Storage:
store roll upright

Base:
cork/PU-foam

Order information:
590705 - Roll 35 m, 1 m wide, 3 mm thick - pallet: 6 pieces

WAKOL TS 112 Footfall Soundproofing Mat, 2 mm



Area of application:
Cork/polyurethane foam matting for improving the footfall soundproofing and heat insulation of flooring structures in old and new buildings. WAKOL TS 112 is, according to DIN EN 13501-1 classified with Bfl-S1 (hardly flammable), and suitable as soundproofing material under PVC, CV, textile, linoleum and caoutchouc flooring, as well as mosaic parquet (cubes), on edge lamella, strip, multi-layer parquet, wood block RE/WE, solid wood planks (type of wood oak, max. 16 cm in width) and stratifie flooring indoors.

Laying:
completely cover, with mats closely abutting one another

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
19 dB in combination with 10 mm multi-layer parquet

Reaction to fire (according to ISO 11 925/EN 13 501):
Bfl-S1

Storage:
store roll upright

Base:
cork/PU-foam

Order information:
590706 - Roll 30 m, 1 m wide, 2 mm thick - pallet: 11 pieces

WAKOL TS 160 Footfall Soundproofing Mat



Area of application:
Polypropylene soundproofing mat with single-sided aluminium lamination for improving the footfall sound insulation. WAKOL TS 160 Footfall Soundproofing Mat has cutouts for accommodating WAKOL MS 262 Parquet Adhesive, firm-elastic, and is suitable for laying strip parquet and solid wood planks up to max. 18 cm in width and multi-layer parquet as of 90 cm in length indoors.

Laying:
loosly, with the metallic side up

Base:
polypropylene

Consumption:
corresponding to the room size

Footfall sound reduction (as per DIN EN ISO 140-8):
17 dB in combination with 10 mm ready-to-lay parquet

Storage:
store roll upright

Order information:
590602 - Roll 12 m, 1.25 m wide, 3 mm thick - pallet: 12 pieces

WAKOL UM 110 Blocking Mat



Area of application:
Loosely laid mat with napped backing for blocking excessive residual moisture in cement paving up to max. 5 CM% / 95 corresponding RH %, calcium sulphate concrete up to max. 2 CM% / 85 corresponding RH %, raw concrete ceiling up to max. 7% by weight / 95 corresponding RH %, as well as for uncoupling subfloors not ready for laying and for protecting existing floors for subsequently laying of textile flooring, PVC flooring and CV flooring indoors.

Laying:
loosly, with sheets closely abutting one another


Base:
fibreglass, bonded

Consumption:
corresponding to the room size

Storage:
store roll upright

Order information:
591802 - 35 m roll, 2 m wide, 1.5 mm thick - pallet: 12 pieces

WAKOL TS 170 Footfall Soundproofing Sheet

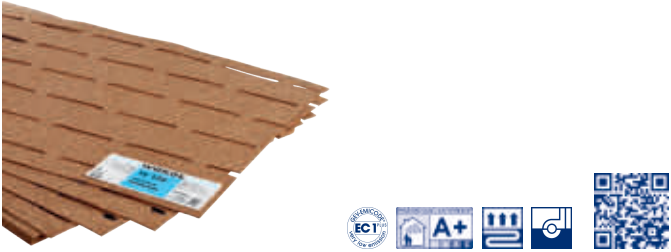

Area of application:
Natural cork mat for improving footfall sound insulation with cutouts for accommodating WAKOL MS 262 Parquet Adhesive, firm-elastic, and suitable for laying strip parquet and solid wood planks up to max. 18 cm in width and multi-layer parquet as of 90 cm in length as well as for cork on HDF/MDF carrier with tongue and groove joining or click joining on absorbent and non-absorbent subfloors indoors.

Laying:
loosly, in irregular pattern

Storage:
store boxes flat

Consumption:
corresponding to the room size

Base:
natural cork

Footfall sound reduction (as per DIN EN ISO 140-8):
15 dB in combination with 14 mm multi-layer parquet

Order information:
590604 - 52 sheets - each 915 x 610mm, 2.5 mm thick - pallet: 1.040 pieces; 20 boxes with 52 pieces each

WAKOL Büffel Universal Adhesive



Area of application:
For laying floor coverings such as PVC and textile flooring, for wall coverings such as ceramic tiles, under wall paper and cork wall coverings and for ceiling coverings such as rigid foam sheets on absorbent subfloors indoors.

Application method:
trowel notch size according to TKB A2 for PVC flooring, C2 or C3 for ceramic tiles

Storage:
not below +5 °C, sensitive to frost

Base:
acrylate dispersion

Consumption:
approx. 350-1400 g/m²

Airing time:
none

Open time:
up to 30 minutes depending on the trowel notch size

Order information:
326107 - 4.0 kg - pallet: 175 pieces
326105 - 1.0 kg - pallet: 384 pieces; 32 boxes with 12 pieces each

WAKOL RT 5960 Cleaning Cloth



Area of application:
Impregnated, well absorbent cloth for cleaning hands and tools, finished parquet surfaces and smooth coverings, especially when soiled with non-hardened PU adhesives, oils, grease and paint. Bucket with reclosable removal opening.

Storage information:
not sensitive to frost

Base:
polyethylene

Order information:
596002 - 150 units in bucket - pallet: 90 pieces

WAKOL RS 5935 Edging Strips



Area of application:
Self adhesive, permanently elastic edge strips to be used if thicker levelling layers are required and before installation of WAKOL Z 515 Thin Screed and WAKOL Z 560 Rapid Screed.

Storage information:
not sensitive to frost

Base:
polyethylene

Order information:
593502 - Roll 25 m, 50 mm wide, 5 mm thick - pallet: 120 pieces; 12 boxes with 10 pieces each

WAKOL Levelling Pin



Area of application:
Self-adhesive plastic pin with a scale from 10-100 mm before levelling with Wakol Levelling Compounds or WAKOL Z 515 Thin Screed.

Consumption:
corresponding to the room size, room geometry and unevenness to be compensated

Storage:
not sensitive to frost

Base:
synthetic material

Order information:
598202 - 50 pieces

WAKOL RV 105 Neoprene Dilution



Area of application:
For producing a primer from Wakol neoprene adhesives and for cleaning tools.

Mixture:
to produce a primer, mix 1 part WAKOL RV 105 with 1 part contact adhesive

Storage:
store in a cool and dry place, not sensitive to frost

Base:
organic solvent

Order information:
180306 - 4.0 kg - pallet: 126 pieces

WAKOL RS 5945 Edging Strips



Area of application:
Permanently elastic edge stripes with self-adhesive pedestal to be used if thicker levelling layers are required and before installation of WAKOL Z 515 Thin Screed and WAKOL Z 560 Rapid Screed.

Storage information:
not sensitive to frost

Base:
polyethylene

Order information:
594502 - Roll 25 m, 50 mm wide, 5 mm thick - pallet: 72 pieces; 18 boxes with 4 pieces each

WAKOL Primer Roller, 11mm



Area of application:
Microfibre roller for easy applying of Wakol primers on absorbent and non-absorbent subfloors. Also suitable for applying Wakol Dispersion contact adhesives and Wakol fixations.

Base:
microfibre

Order information:
597503 - 12 pcs with 1 bracket - pallet: 60 pieces

WAKOL MS Special Roller



Area of application:
Polyamide roller for applying WAKOL MS 330 Silane Primer when used as moisture barrier, for priming on strong absorbent subfloors, old subfloors and adhesive residues. Also suitable for applying WAKOL PS 275 Concrete Repair Primer.

Base:
polyamide

Order information:
597312 - 2 pieces - pallet: 900 pieces; 10 boxes with 90 pieces each

WAKOL Dust Reducer




Area of application:
Extraction ring for dust reduction when working with levelling compounds, suitable for WAKOL Stirring Pail. WAKOL Dust Reducer will be delivered with a universal vacuum adapter.

Base:
synthetic material

Order information:
598302 - 1 piece - pallet: 150 pieces; 150 boxes with 1 piece each

WAKOL Basket Stirrer



Area of application:
Basket stirrer with diameter of 120 mm and blade at basket ring. Equipped with M14 mounting for all current mixers.

Base:
steel

Order information:
592310 - 1 piece

WAKOL Rakel with Distance Pins, 56cm



Area of application:
Scraper, 56 cm wide, equipped with distance pins for blade coating, also of higher layer thickness or fibre-reinforced levelling compounds. Can be used with and without trowel blades. Rakel blades notched on both sides are available as an accessory. The WAKOL Rakel Blade is made from hardened steel and available in the notch size TKB R2.

Base:
steel/synthetic material

Order information:
598403 - 1 pcs. Rakel 56 cm
598031 - 10 pcs. TKB R2 56 cm - 1 box with 10 pieces each

WAKOL Master Trowel



Area of application:
Ergonomic master trowel, 18 cm or 28 cm wide, for applying Wakol adhesives. Trowel blades notched on both sides, made from hardened steel, are available as an accessory. The WAKOL Trowel Blade is 18 cm or 28 cm wide and available in the notch sizes TKB A1, TKB A2, TKB B1 und TKB B2.

Base:
steel/wood

Order information:
597903 - 18 cm - 1 box with 10 pieces each
597910 - 28 cm - 1 box with 10 pieces each

WAKOL Airing Roller



Area of application:
Airing roller, 25 cm wide with splash protection, for airing and improving flow properties of freshly applied self-flowing Wakol levelling compounds.

Base:
steel/synthetic material

Order information:
597402 - 25 cm in width

WAKOL Rakel



Area of application:
56-cm-wide Rakel for applying self-flowing Wakol levelling compounds. Rakel blades notched on both sides are available as an accessory. The WAKOL Rakel Blade is made from hardened steel and available in the notch size TKB R2.

Base:
steel/wood

Order information:
598402 - 1 pcs Rakel 56 cm
598031 - 10 pcs. TKB R2 56 cm - 1 box with 10 pieces each

WAKOL Rakel Blade



Area of application:
Rakel blade notched on both sides, made from hardened steel, used in WAKOL Rakel or WAKOL Rakel with distance pins, 56 cm. WAKOL Rakel Blade is available in width of 56 cm and in the notch size TKB R2.

Base:
steel

Order information:
598031 - 10 pcs. TKB R2 56 cm - 1 box with 10 pieces each

WAKOL Trowel Blade



Area of application:
Trowel blade notched on both sides, made from hardened steel, used in WAKOL Master Trowel. WAKOL Trowel Blade is available in width of 18 cm or 28 cm and in the notch sizes TKB A1, TKB A2, TKB B1 and TKB B2.

Base:
steel

Order information:
598010 - 10 pcs. TKB A1 28 cm - 1 box with 10 pieces each
598007 - 10 pcs. TKB A1 18 cm - 1 box with 10 pieces each
598011 - 10 pcs. TKB A2 28 cm - 1 box with 10 pieces each
598003 - 10 pcs. TKB A2 18 cm - 1 box with 10 pieces each
598012 - 10 pcs. TKB B1 28 cm - 1 box with 10 pieces each
598002 - 10 pcs. TKB B1 18 cm - 1 box with 10 pieces each
598014 - 10 pcs. TKB B2 28 cm - 1 box with 10 pieces each
598006 - 10 pcs. TKB B2 18 cm - 1 box with 10 pieces each

WAKOL Speciality Trowel Blade 5




Area of application:
Special trowel blade, 18 cm wide, used in WAKOL Master Trowel 18 cm to form a moisture barrier on unheated cement screeds up to 4 CM% resp. 85 % corresponding relative humidity for laying parquets (all types of parquets with tongue and groove joint) with WAKOL MS 262 Parquet Adhesive, firm-elastic, WAKOL MS 260 Parquet Adhesive, firm-elastic, WAKOL MS 232 Parquet Adhesive, elastic, WAKOL MS 230 Parquet Adhesive, elastic or WAKOL MS 228 Ready-to-lay Parquet Adhesive, elastic.
Alternatively the WAKOL Speciality Trowel 5, 18 cm wide, can also be used.

Base:
steel

Order information:
598021 - 10 pcs. Speciality Trowel Blade 18 cm - 1 box with 10 pieces
598602 - 1 pcs. Speciality Trowel 18 cm

WAKOL Parquet Notched Trowel

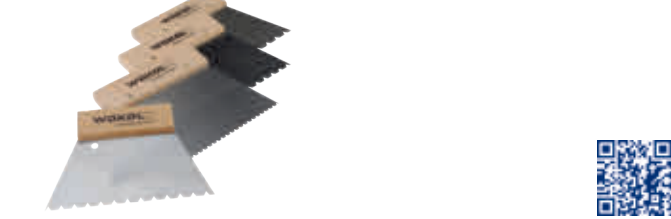

Area of application:
Notched trowel according to TKB for applying Wakol parquet adhesives. WAKOL Parquet Notched Trowels are available in notch sizes TKB B3, TKB B5, TKB B11, TKB B13 and TKB B15 with 18 cm width.

Base:
steel/wood

Order information:
598502 - 10 pcs. TKB B3 18 cm - 1 box with 10 pieces
598503 - 10 pcs. TKB B5 18 cm - 1 box with 10 pieces
598504 - 10 pcs. TKB B11 18 cm - 1 box with 10 pieces
598505 - 10 pcs. TKB B13 18 cm - 1 box with 10 pieces
598506 - 10 pcs. TKB B15 18 cm - 1 box with 10 pieces

WAKOL Replaceable Nozzle



Area of application:
Replaceable nozzles, 200 mm and 400 mm wide, for use in WAKOL Applicator 90, Parkett-X-Press, Parkett-X-Press Air and Lite-X-Press. Appropriate guide brackets in widths of 200 mm and 400 mm are also available.

Order information:
597605 - 7 pcs. 200-11-3,5
597604 - 7 pcs. 200-18-3,5
597625 - 5 pcs. 400-25-3,5 - pallet: 600 pieces; 120 boxes with 5 pieces each
597624 - 5 pcs. 400-40-3,5 - pallet: 600 pieces; 120 boxes with 5 pieces each
597633 - 1 pc. Guide Bracket 200 mm
597635 - 1 pc. Guide Bracket 400 mm

WAKOL Applicator 90



Area of application:
Battery-operated sausage gun for applying Wakol adhesives in tubular bags (Ø 88 mm / 4.200 ml), e.g. WAKOL MS 292, WAKOL MS 262 or WAKOL MS 232. The WAKOL Applicator 90 comes with a 200 mm distributor head for mounting WAKOL Replaceable Nozzles, a quick-charger and two 18 V rechargeable batteries in the case including a stand.

Weight:
WAKOL Applicator 90 approx. 5.8 kg, incl. case and accessories approx. 14 kg

Drive:
controllable, 9-stage

Holder:
Aluminium tube for tubular bags, diameter 90 mm

Delivery:
WAKOL Applicator 90, 200 distributor head, two 18 V li-ion batteries, quick-charger with charging indicator, transport case with stand

Charging station:
Input: 110 - 240V ~ 50/60Hz 60W
Output: DC 18V A 3.0A

Order information:
597632 - 1 piece
597639 - 1 pc. rechargeable battery
18 V - 1,5 AH
597637 - 1 pc. quick-charger

Safety:
CE certified

WAKOL Notched Trowel



Area of application:
Notched trowel according to TKB for applying Wakol dispersion adhesives. WAKOL Notched Trowels are available in notch sizes TKB A1 and TKB A2 with 25 cm width.

Base:
steel/wood

Order information:
598512 - 10 pcs. TKB A2 25 cm - 1 box with 10 pieces
598511 - 10 pcs. TKB A1 25 cm - 1 box with 10 pieces

WAKOL Speciality Trowel 5



Area of application:
Special notch to form a moisture barrier on unheated cement screeds up to 4 CM% resp. 85 % corresponding relative humidity for laying parquets (all types of parquets with tongue and groove joint) with WAKOL MS 262 Parquet Adhesive, firm-elastic, WAKOL MS 260 Parquet Adhesive, firm-elastic, WAKOL MS 232 Parquet Adhesive, elastic, WAKOL MS 230 Parquet Adhesive, elastic or WAKOL MS 228 Ready-to-lay Parquet Adhesive, elastic.
Alternatively, the WAKOL Speciality Trowel Blade 5, 18 cm wide, for use in WAKOL Master Trowel is also available.

Base:
steel/aluminium

Order information:
598602 - 1 pcs. Speciality Trowel 18 cm
598021 - 10 pcs. Speciality Trowel Blade 18 cm - 1 box with 10 pieces

WAKOL Applicator 50



Area of application:
Battery-operated sausage gun for applying Wakol adhesives in tubular bags (Ø 49 mm / 600 ml) and cartridges, e.g. WAKOL MS 262 or WAKOL MS 245. The WAKOL Applicator 50 comes with a quick-charger and two 10.8 V rechargeable batteries in the case.

Weight:
WAKOL Applicator 50 approx. 2,3 kg; incl. case and accessories approx. 5.3 kg

Holder:
Compound holder 600 ml for tabular bags and cartridges, diameter 50 mm

Delivery:
WAKOL Applicator 50, 2 Li-Ion batteries with 10.8 V, quick-charger with load indicator, carriage case

Charging station:
Input: 100 - 240V ~ 50/60 Hz 30W
Output: DC 10.8 A 2A charging time approx. 30 min

Drive:
controllable, up to 330 mm/min, automatic return

Safety:
CE certified

Order information:
597603 - 1 piece

WAKOL Proportioning Pail



Area of application:
Transparent, graduated proportioning pail (11 l) for easily measuring out water. Lid is separately available.

Order information:
590203 - 1 pcs. Pail - pallet: 250 Stück
590204 - 1 pcs. Lid

WAKOL Stirring Pail



Area of application:
Stirring pail (30 l) with firm rim and handle shell for mixing all Wakol levelling compounds.

Order information:
590102 - 1 piece - pallet: 240 pieces

WAKOL Knee Breeches



Area of application:
High-quality knee breeches made of 65 % polyester/ 35 % cotton with knee area reinforced with additionally fitted knee pockets. Many pockets – one pouch and two back pockets with flaps and snap fasteners – make the breeches a practical item of clothing. Breathable, especially hard-wearing.

Colour:
black/ grey

Size:
42-64; 90-110; 24-29

Order information:
591112 - 56
591113 - 54
591114 - 52
591115 - 50
591116 - 48
591117 - 46
591118 - 44
591101 - special sizes

WAKOL Dungarees



Area of application:
Dungarees made of 65 % polyester/ 35 % cotton for the highest quality demands. Especially hard-wearing, breathable, for good body temperature. 2 fitted pouch pockets made of Cordura, on right double folding rule pocket, reflective piping on pocket openings and flaps, on left thigh pocket with flap and snap fasteners, fitted mobile phone pocket, double bib pocket, reinforced rear pocket. Reverse of fabric slightly roughened, very breathable, especially hard-wearing.

Colour:
black/grey

Size:
42-64; 90-110; 24-29

Order information:
591008 - 56
591007 - 54
591006 - 52
591005 - 50
591004 - 48
591003 - 46
591002 - 44
591001 - special sizes

WAKOL Softshell-Jacket



Area of application:
Water-repellent jacket made of 92 % polyester/ 8 % elasthane in modern form fitted with two angled side pockets with zipper, two inner pockets and elastic seam cord. Black with contrasts in white and silver, breathable, especially hard-wearing

Colour:
charcoal grey

Size:
S-3XL

Order information:
591227 - 3XL
591226 - XXL
591225 - XL
591224 - L
591223 - M
591222 - S

WAKOL Work Jacket



Area of application:
Jacket made of 65 % polyester/ 35 % cotton in extended blouson form fitted with convenient snap fasteners, also on the sleeves and with comfortable pleated back. Many pockets – two breast pockets with flaps, two side pockets – make the jacket a practical item of clothing. Breathable, especially hard-wearing.

Colour:
black/grey

Size:
42-64; 90-110; 24-29

Order information:
591212 - 1 piece

WAKOL Polo-Shirt



Area of application:
Fashionable polo-shirt made of 100 % cotton. Neckband, colour-contrasting button strip.

Colour:
white/grey

Size:
S-5XL

Order information:
591602 - 5XL
591603 - 4XL
591604 - 3XL
591605 - XXL
591606 - XL
591607 - L
591608 - M
591609 - S

WAKOL Stool



Area of application:
Inflatable stool, giving a comfortable and pleasant feeling of sitting - comparable to a "pezziball". Suitable for the usage in the showroom, at trade fairs and events. Delivery includes a transport bag. A suitable pump can be ordered seperately. Height: approx. 50 cm; diameter: approx. 45 cm; weigth: approx. 3 kilos

Colour:
grey/blue

Order information:
599006 - 1 pc. electrical pump
599005 - 1 pc. stool

Direct installation of elastic and textile floorings
on standardised or renovated subfloors

Subfloors	Cement screeds (CT) with sufficient smooth and level surface	Calcium sulfate screeds (CA) with sufficient smooth and level surface	Wood based material boards Chipboards according to DIN EN 312 (P4 up to P7), OSB according to DIN EN 300 (OSB/2 up to OSB/4)	Newly levelled subfloors with Wakol levelling compounds	Newly levelled subfloors with Wakol levelling compounds plastified with WAKOL D 3060 Plastification Additive	Gypsum fibre boards, primed with Wakol primers	WAKOL TS 102 Footfall Soundproofing Mat, 2 mm completely cover bonded WAKOL TS 103 Footfall Soundproofing Mat 3 mm completely cover bonded WAKOL TS 112 Footfall Soundproofing Mat 2 mm completely cover bonded
Species	Prime with D 3040 1:2 / D 3035	Prime with D 3040 1:2 / D 3035	Smooth joints and screw holes with A 830 plastified with D 3060				Please note technical information TS 102, TS 103 and TS 112
Textile flooring with TR-backing	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3308
Textile flooring with synthetic fleece backing or latex backing	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3410 D 3308	D 3240 D 3310 D 3270 D 3311 D 3304 D 3312 D 3306 D 3360 D 3307 D 3308
Textile flooring with jute backing Textile flooring, woven	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308 D 3410	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308 D 3410	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308 D 3410	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308 D 3410	D 3240 D 3310 D 3304 D 3311 D 3306 D 3312 D 3307 D 3360 D 3308
Textile flooring with PVC-backing	D 3240 D 3307 D 3320 D 3360	D 3240 D 3307 D 3320 D 3360	D 3240 D 3307 D 3320 D 3360 D 3410	D 3240 D 3307 D 3320 D 3360 D 3410	D 3320 D 3360 D 3410		D 3240 D 3307 D 3320 D 3360
Needle fleece flooring	D 3240 D 3312 D 3304 D 3360 D 3308 D 3310 D 3311	D 3240 D 3312 D 3304 D 3360 D 3308 D 3310 D 3311	D 3240 D 3312 D 3304 D 3360 D 3308 D 3410 D 3310 MS 550 D 3311	D 3240 D 3312 D 3304 D 3360 D 3308 D 3410 D 3310 MS 550 D 3311	D 3240 D 3312 D 3304 D 3360 D 3308 D 3410 D 3310 MS 550 D 3311	D 3240 D 3312 D 3304 D 3360 D 3308 D 3410 D 3310 MS 550 D 3311	D 3240 D 3312 D 3304 D 3360 D 3308 D 3410 D 3310 D 3311
Linoleum with jute woven backing			D 3240 D 3360 D 3304 D 3410 D 3311 MS 550 D 3318	D 3240 D 3360 D 3304 D 3410 D 3311 MS 550 D 3318	D 3304 MS 550 D 3311 D 3318 D 3410		D 3240 *2 D 3360 *2 D 3304 *2 MS 550 *2 D 3311 *2 D 3318 *2
PVC flooring, homogeneous			D 3125 D 3320 D 3240 D 3360 D 3307 D 3410 D 3317 MS 550 D 3318 MS 552 D 3319 PU 270	D 3125 D 3320 D 3240 D 3360 D 3307 D 3410 D 3317 MS 550 D 3318 MS 552 D 3319 PU 270	D 3125 D 3360 D 3317 D 3410 D 3318 MS 550 D 3319 MS 552 D 3320 PU 270		D 3125 *2 D 3360 *2 D 3317 *2 MS 550 *2 D 3318 *2 MS 552 *2 D 3319 *2 PU 270 *2 D 3320 *2
PVC bond flooring with polyester fleece backing and CT flooring			D 3125 D 3360 D 3317 D 3410 D 3318 MS 550 D 3319 MS 552 D 3320 PU 270	D 3125 D 3320 D 3240 D 3360 D 3307 D 3410 D 3317 MS 550 D 3318 MS 552 D 3319 PU 270	D 3125 D 3360 D 3317 D 3410 D 3318 MS 550 D 3319 MS 552 D 3320 PU 270		D 3125 *2 MS 550 *2 D 3317 *2 MS 552 *2 D 3318 *2 PU 270 *2 D 3320 *2 D 3360 *2
LVT flooring			D 3125 D 3360 D 3317 D 3410 D 3318 MS 550 D 3319 MS 552 D 3320 PU 270	D 3125 D 3330 D 3317 D 3360 D 3318 D 3410 D 3319 MS 550 D 3320 MS 552 PU 270	D 3125 D 3360 D 3317 D 3410 D 3318 MS 550 D 3319 MS 552 D 3320 PU 270		D 3125 *2 D 3360 *2 D 3317 *2 MS 550 *2 D 3318 *2 MS 552 *2 D 3319 *2 PU 270 *2 D 3320 *2
Rubber flooring with smooth, grinded backing			D 3410 MS 550 MS 552 PU 270	D 3318 *1 MS 550 D 3360 *1 MS 552 D 3410 *1 PU 270	D 3410 MS 550 MS 552 PU 270		MS 550 *3 MS 552 *3 PU 270 *3

The applicable standards and fact sheets must be heeded with all laying operations as well as manufacturer’s instructions.

Please note:
*1 Please only use cement based levelling compounds
*2 Pretreat surface with WAKOL A 830 Anhydrite Levelling Compound or WAKOL Z 615 Levelling Compound, dust-reduced plastified with WAKOL D 3060 Plastification Additive

*3 Pretreat surface with WAKOL Z 615 Levelling Compound, dust-reduced plastified with WAKOL D 3060 Plastification Additive
All mentioned products are very low in emissions

Subfloor preparation of non suitable subfloors for direct bonding of elastic and textile flooring according to DIN 18365

Subfloors	Preparation	Prepare	Primer Dilution	Drying time	Bonding of reinforce- ment / decoupling	Reinforcement/ decoupling	Primer Dilution	Drying time	Levelling
Cement screeds (CT), Concrete slabs		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	when suitable for walking					A 830 Z 615 Z 625 Z 630 Z 635 Z 675 Z 680 Z 715 Z 515
Calcium sulfate screeds (CA)		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	approx. 2-4 hours, when suitable for walking in combination with A 830					
Magnesite screeds (MA)		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330	approx. 1 hour approx. 4-6 hours approx. 1 hour			D 3045	approx. 1 hour	
Mastic asphalt screeds (AS)		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:1 with water or D 3045	approx. 1 hour					
Terrazzo, tiles		Cleaning with R 4515, RS 5935 or RS 5945	D 3035 or D 3040 1:1 with water or D 3045	approx. 1 hour					
Gypsum fibre boards		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	approx. 2-4 hours					A 830 *1 Z 615 *1 Z 625 *1
Old adhesive remnants on standardised subfloors, nor as waterproof		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330	approx. 1 hour approx. 4-6 hours approx. 1 hour			D 3045	approx. 1 hour	A 830 Z 615 Z 625 Z 630 Z 635 Z 675 Z 680 Z 715 Z 515
Cement screeds (CT) with to high residual humidity up to 6 CM%/98 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating, concrete with to high residual humidity up to 7.5 %/98 % KRL by weight		Grind and vacuum RS 5935 or RS 5945	PU 280 2-fold layer PU 235 2-fold layer	approx. 1 hour per layer approx. 4-6 hours per layer					
Cement screeds (CT) with to high residual humidity up to 5 CM%/95 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating, concrete with to high residual humidity up to 7 %/95 % KRL by weight		Grind and vacuum RS 5935 or RS 5945	MS 330	approx. 1 hour					
Cement screeds (CT), concrete with insufficient surface stability		Grind and vacuum RS 5935 or RS 5945	PU 280 *2 PU 235 *2 MS 330 *2	approx. 1 hour approx. 4-6 hours per layer approx. 1 hour					
Cement screeds (CT) with to high residual humidity up to 5 CM%/95 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating		Grind and vacuum RS 5935 or RS 5945	D 3080 1:1 with water then D 3080 undiluted	at least. 30 minutes at least. 120 minutes					Z 615 Z 630 Z 625 Z 635 Z 675 Z 680 Z 715 Z 515
Cement screeds (CT), concrete, calcium sulfate screeds (CA), magnesite sceeds (MA) or mastic asphalt screeds (AS) sufficient load-bearing but with cracks or not homogeneous (different pavings)		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330 *3	approx. 1 hour approx. 4-6 hours approx. 1 hour	MS 230 MS 260 MS 290 PU 210	PU 225 PU 385 PU 215 *E PU 220 *E	EM 140 *2 RP 104 *2 RP 107 *2 RP 109 *2 RP 115 *2 RP 704 *2		A 830 Z 615 Z 625 Z 630 Z 515
Old, finished floors, permanent existing only tiles, wood planks, linoleum, parquet		Cleaning tiles with R 4515, sand entire surface RS 5935 or RS 5945			MS 230 MS 260 MS 290 PU 210	PU 225 PU 385 PU 215 *E PU 220 *E	EM 140 RP 104 RP 107 RP 109 RP 115 RP 704		A 830 Z 615 Z 625 Z 630
Old, finished floors, permanent existing only tiles, wood planks, linoleum, parquet		Cleaning tiles with R 4515, sand entire surface							D 3060 + Z 615 Z 625 Z 630 Z 640 Z 645

The applicable standards and fact sheets must be heeded with all laying operations.

Please note:
*1 If levelling is necessary
*2 Depending on subfloor stability, in case of doubt please consult Wakol technical support
*3 Direct installation only with MS Parquet Adhesives
*E All mentioned products are very low in emissions, except for *E

Direct installation of parquet on standardised subfloors

Subfloors Flooring	Cement screeds (CT)		Calcium sulfate screeds (CA)		Magnesia screeds (MA)		Mastic asphalt screeds (AS)		Wood-based material boards Chipboards according to DIN EN 312 (P4 up to P7) OSB according to DIN EN 300 (OSB/2 up to OSB/4)	Gypsum fibre boards, as far as parquet type is recommended for direct bonding by manufacturer		
	Specifics						The hardness of the cast asphalt must be suitable for cementing parquets					
Prepare	Grind and vacuum D 3055 *7		Grind and vacuum D 3055 *7		Grind and vacuum		Vacuum		Vacuum		Vacuum D 3055 *7	
Mosaic parquet DIN EN 13488, edge lamella parquet DIN EN 14761	D 1640 *5 D 1690 *5 MS 230 *5 MS 232 *5 MS 260 *5 MS 262 *5 MS 290 MS 292	PU 210 PU 225 PU 385 *1 K 410 *5 *E PU 215 *E PU 220 *E	MS 230 *5 MS 232 *5 MS 260 *5 MS 262 *5 MS 290 MS 292	PU 210 PU 225 PU 385 *1 K 410 *5 *E PU 215 *E PU 220 *E	MS 230 *5 MS 232 *5 MS 260 *5 MS 262 *5 MS 290 MS 292	PU 210 PU 225 PU 385 *1 K 410 *5 *E PU 215 *E PU 220 *E	MS 230 *3 *5 MS 232 *3 *5 MS 260 *3 *5 MS 262 *3 *5 MS 290 MS 292	PU 210 PU 225 PU 385 *1*3 K 410 *5 *E PU 215 *E PU 220 *E	MS 230 *5 MS 232 *5 MS 260 *5 MS 262 *5 MS 290 MS 292	PU 210 PU 225 PU 385 *1 K 410 *5 *E PU 215 *E PU 220 *E	MS 230 *5 MS 232 *5 MS 260 *5 MS 262 *5 MS 290 MS 292	PU 210 PU 225 PU 385 *1 K 410 *5 *E PU 215 *E PU 220 *E
Strip parquet DIN EN 13226	D 1640 *2 D 1690 *5 MS 230 *6 MS 232 *6 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 230 *3 *6 MS 232 *3 *6 MS 260 *3 MS 262 *3 MS 290 MS 292	PU 210 PU 225 PU 385 *3 K 410 *E PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E
Solid parquet 10 mm DIN EN 13227	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225	K 410 *E PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225	K 410 *E PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225	K 410 *E PU 215 *E PU 220 *E	MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210 PU 225	K 410 *E PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225	K 410 *E PU 215 *E PU 220 *E		
Multi-layered parquet DIN EN 13489, 2-layer	D 1640 D 1690 MS 228 MS 230 MS 232 MS 260 MS 262 MS 290	MS 292 PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 230 *3 MS 232 *3 MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210	PU 225 PU 385 *3 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E
Multi-layered parquet DIN EN 13489, 3-layer	D 1690 MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 230 *3 MS 232 *3 MS 260 *3 MS 262 *3 MS 290 MS 292	PU 210 PU 225 PU 385 *3 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290	PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E
Solid plank DIN EN 13226	MS 260 *4 MS 262 *4 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 *4 MS 262 *4 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 *4 MS 262 *4 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 *3 *4 MS 262 *3 *4 MS 290 MS 292 PU 210	PU 225 PU 385 *3 K 410 *E PU 215 *E PU 220 *E	MS 260 *4 MS 262 *4 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 *4 MS 262 *4 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E
Wood block RE/WE DIN EN 68702	MS 260 MS 262 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210	PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210	PU 225 PU 385 *3 K 410 *E PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210	PU 225 K 410 *E PU 215 *E PU 220 *E PU 385		

The applicable standards and fact sheets must be heeded with all laying operations.

Please note:

- *1 Only on edge lamella from 22 mm in width
- *2 Only oak wood
- *3 Only in combination with WAKOL PU 280 Polyurethane Primer, WAKOL PU 235 Polyurethane Primer or WAKOL MS 330 Silane Primer
- *4 Up to max. 18 cm in width, oak wood up to max. 20 cm in width

- *5 On edge lamella parquet from 16 mm in width, max. 200 mm in length
- *6 Max. 80 mm in width, 600 mm in length
- *7 If necessary
- *E All mentioned products are very low in emissions, except for *E

Direct installation of parquet on renovated subfloors

<div>Subfloors</div> <div>Flooring</div>	Sufficient level and firmly attached terrazzo-, stone tiles, wood planks and parquet floors	Newly levelled subfloors with Wakol levelling compounds suitable for parquet laying	Newly levelled subfloors with cement based Wakol levelling compounds plastified with WAKOL D 3060 Plastification Additive	WAKOL PU 235 Polyurethane Primer WAKOL PU 280 Polyurethane Primer WAKOL MS 330 Silane Primer *5	WAKOL TS 102 Footfall Soundproofing Mat, 2 mm completely cover bonded WAKOL TS 103 Footfall Soundproofing Mat, 3 mm completely cover bonded WAKOL TS 112 Footfall Soundproofing Mat, 2 mm completely cover bonded	WAKOL EM 140 Uncoupling Fleece WAKOL RP 104 Decoupling Sheet, 4 mm WAKOL RP 107 Decoupling Sheet, 4 mm WAKOL RP 109 Decoupling Sheet, 9 mm WAKOL RP 115 Decoupling Sheet, 15 mm WAKOL RP 704 Project Decoupling Sheet, 4 mm
Specifics			within 72 hours		Please note technical information TS 102, TS 103 and TS 112	
Prepare	Cleaning tiles with R 4515, sand entire surface					
Mosaic parquet DIN EN 13488, edge lamella parquet DIN EN 14761	MS 230 *6 MS 232 *6 MS 260 *6 MS 262 *6 MS 290 MS 292 PU 210 PU 225 PU 385 *4 PU 215 *E PU 220 *E	D 1640 *6 D 1690 *6 MS 230 *6 MS 232 *6 MS 260 *6 MS 262 *6 MS 290 MS 292 MS 292 PU 210 PU 210 PU 225 PU 225 PU 385 *4 K 410 *6 *E PU 215 *E PU 220 *E	PU 210 PU 225 PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 *6 MS 262 *6 MS 290 MS 292 PU 210 PU 225 PU 385 *4 PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 *6 MS 262 *6 MS 290 MS 292 PU 210 PU 225 PU 385 *4 PU 215 *E PU 220 *E	MS 230 *6 MS 232 *6 MS 260 *6 MS 262 *6 MS 290 MS 292 PU 210 PU 225 PU 385 *4 PU 215 *E PU 220 *E
Strip parquet DIN EN 13226	MS 230 *2 MS 232 *2 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	D 1640 *1 D 1690 *6 MS 230 *2 MS 232 *2 MS 260 MS 262 MS 290 MS 292 MS 292 PU 210 PU 210 PU 225 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	PU 210 PU 225 PU 215 *E PU 220 *E	MS 230 *2 MS 232 *2 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 230 *2 MS 232 *2 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 230 *2 MS 232 *2 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E
Solid parquet 10 mm DIN EN 13227	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 K 410 *E PU 215 *E PU 220 *E		MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 215 *E PU 220 *E		MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 215 *E PU 220 *E
Multi-layered parquet DIN EN 13489, 2-layer	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	D 1640 D 1690 MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	PU 210 PU 225 PU 215 *E PU 220 *E	MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E
Multi-layered parquet DIN EN 13489, 3-layer	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E	PU 210 PU 225 PU 215 *E PU 220 *E	MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E
Solid plank DIN EN 13226	MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210 PU 225 PU 385 K 410 *E PU 215 *E PU 220 *E		MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 260 *3 MS 262 *3 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E
Wood block RE/WE DIN EN 68702		MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 210 PU 385 K 410 *E PU 215 *E PU 220 *E		MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	MS 260 MS 262 MS 290 MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	

The applicable standards and fact sheets must be heeded with all laying operations.

- Please note:
- *1 Only oak wood
 - *2 Max. 80 mm in width, 600 mm in length
 - *3 Up to max. 18 cm in width, oak wood up to max. 20 cm in width
 - *4 Only on edge lamella from 22 mm in width
 - *5 Direct installation only with MS Parquet Adhesives
 - *6 On edge lamella parquet from 16 mm in width, max. 200 mm in length
- *E All mentioned products are very low in emissions, except for *E

Subfloor preparation of non suitable subfloors for direct bonding of parquet according to DIN 18356

Subfloors	Preparing	Prepare	Primer Dilution	Drying time	Bonding of reinforce- ment/decoupling	Reinforcement/ decoupling	Primer Dilution	Drying time	Levelling
Cement screeds (CT), concrete with insufficient levelness		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	when suitable for walking					A 830 Z 615 Z 625 Z 630 Z 635 Z 715 Z 515
Calcium sulfate screeds (CA), with insufficient levelness		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	approx. 2-4 hours, when suitable for walking in combination with A 830					
Magnesite screeds (MA), with insufficient levelness		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330	approx. 1 hour approx. 4-6 hours approx. 1 hour			D 3045	approx. 1 hour	
Mastic asphalt screeds (AS), with insufficient levelness		Vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:1 with water or D 3045	approx. 1 hour					
Terrazzo, tiles with insufficient levelness		Cleaning with R 4515, RS 5935 or RS 5945	D 3035 or D 3040 1:1 with water or D 3045	approx. 1 hour					
Old adhesive remnants on standardised subfloors		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330	approx. 1 hour approx. 4-6 hours approx. 1 hour			D 3045	approx. 1 hour	A 830 Z 615 Z 625 Z 630 Z 635 Z 715 Z 515
Cement screeds (CT) with to high residual humidity up to 6 CM%/98 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating, concrete with to high residual humidity up to 7.5 %/98 % KRL by weight		Grind and vacuum RS 5935 or RS 5945	PU 280 2-fold layer PU 235 2-fold layer	approx. 1 hour per layer approx. 4-6 hours per layer					
Cement screeds (CT) with to high residual humidity up to 5 CM%/95 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating, concrete with to high residual humidity up to 7 %/95 % KRL by weight		Grind and vacuum RS 5935 or RS 5945	MS 330	approx. 1 hour					
Cement screeds (CT), concrete with insufficient surface stability		Grind and vacuum RS 5935 or RS 5945	PU 280 *1 PU 235 *1 MS 330 *1	approx. 1 hour approx. 4-6 hours per layer approx. 1 hour					
Cement screeds (CT) with to high residual humidity up to 5 CM%/95 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating		Grind and vacuum RS 5935 or RS 5945	D 3080 1:1 with water then D 3080 undiluted	at least 30 minutes at least 120 minutes					A 830 Z 615 Z 625 Z 630 Z 635 Z 715 Z 515
Cement screeds (CT), concrete, calcium sulfate screeds (CA), magnesite sceeds (MA) or mastic asphalt screeds (AS) sufficient load-bearing but with cracks or not homogeneous (different pavings)		Grind and vacuum	PU 280 PU 235 MS 330 *4	approx. 1 hour approx. 4-6 hours approx. 1 hour	MS 228 MS 230 MS 232 MS 260 MS 262 MS 290	MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	EM 140 *1 RP 104 *1 RP 107 *1 RP 109 *1 RP 115 *1 RP 704 *1	TS 102 *1 TS 103 *1 TS 112 *1	
Gypsum fibre boards, as far as parquet type is recommended for direct bonding by manufacturer		Vacuum			MS 228 MS 230 MS 232 MS 260 MS 262 MS 290	MS 292 PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	EM 140 RP 104 RP 107 RP 109 RP 115 RP 704	TS 102 TS 103 TS 112	
Old, finished floors, permanent existing only tiles, wood planks, linoleum, parquet		Cleaning of tiles with R 4515, sand entire surface			MS 228 MS 230 MS 232 MS 260 MS 262 MS 290	MS 292 PU 210 PU 225 PU 385	EM 140 RP 104 RP 107 RP 109 RP 115 RP 704	TS 102 TS 103 TS 112	
Permanent existinng tiles, wood planks, parquet		Cleaning of tiles with R 4515, sand entire surface							D 3060 *2 + Z 615 *2 Z 625 *2 Z 630 *2 Z 640 *2 Z 645 *2

The applicable standards and fact sheets must be heeded with all laying operations.

Please note:
*1 Depending on subfloor stability, in case of doubt please consult Wakol technical support
*2 If levelling is necessary

*3 Direct installation only with MS Parquet Adhesives
*E All mentioned products are very low in emissions, except for *E

Direct installation of cork flooring
on standardised or renovated subfloors

<div>Subfloors</div> <div>Flooring</div>	Cement screeds (CT) with sufficient smooth and level surface	Calcium sulfate screeds (CA) with sufficient smooth and level surface	Gypsum fibre boards	Wood based material boards Chipboards according to DIN EN 312 (P4 up to P7), OSB according to DIN EN 300 (OSB/2 up to OSB/4)	Newly levelled subfloors with Wakol cement based levelling compounds	WAKOL RP 104 Decoupling Sheet, 4 mm WAKOL RP 104 Decoupling Sheet, 7 mm WAKOL RP 109 Decoupling Sheet, 9 mm WAKOL RP 115 Decoupling Sheet, 15 mm WAKOL RP 704 Project Decoupling Sheet, 4 mm
Cork floorings with nature cork backing according to ISO 3813 respectively DIN EN 12104	MS 260 *1 MS 290 *1	MS 260 *1 MS 290 *1	MS 260 *1 MS 290 *1	D 3540 *2 MS 260 *1 MS 290 *1	D 3540 MS 260 *1 MS 290 *1	
Cork floorings with HDF/MDF middle layer and cork stabilising layer	MS 260 MS 262 MS 290 MS 292 PU 385	MS 260 MS 262 MS 290 MS 292 PU 385	MS 260 MS 262 MS 290 MS 292 PU 385	MS 260 MS 262 MS 290 MS 292 PU 385	MS 260 MS 262 MS 290 MS 292 PU 385	MS 260 MS 262 MS 290 MS 292 PU 385

The applicable standards and fact sheets must be heeded with all laying operations as well as manufacturer’s instructions.

Please note:
*1 Flat-lying cork floorings
*2 Not on OSB

All mentioned products are very low in emissions

Subfloor preparation of non suitable subfloors for direct bonding of cork floorings according to DIN 18365

Subfloors	Preparing	Prepare	Primer Dilution	Drying time	Bonding of reinforce- ment/decoupling	Reinforcement/ decoupling	Primer Dilution	Drying time	Levelling
Cement screeds (CT)		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	when suitable for walking					Z 615 Z 625 Z 630 Z 635 Z 675 Z 680 Z 715 Z 515
Calcium sulfate screeds (CA)		Grind and vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	approx. 2-4 hours					
Magnesite screeds (MA)		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330	approx. 1 hour approx. 4-6 hours approx. 1 hour			D 3045	approx. 1 hour	
Mastic asphalt screeds (AS)		Vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:1 with water or D 3045	approx. 1 hour					
Terrazzo, tiles		Cleaning with R 4515, RS 5935 or RS 5945	D 3035 or D 3040 1:1 with water or D 3045	approx. 1 hour					
Gypsum fibre boards		Vacuum RS 5935 or RS 5945	D 3035 or D 3040 1:2 with water	approx. 2-4 hour					Z 615 Z 625
Old adhesive remnants on standardised subfloors, waterproof and non-waterproof		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330	approx. 1 hour approx. 4-6 hours approx. 1 hour			D 3045	approx. 1 hour	Z 615 Z 625 Z 630 Z 635 Z 675 Z 680 Z 715 Z 515
Cement screeds (CT) with to high residual humidity up to 6 CM%/98 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating, concrete with to high residual humidity up to 7.5 %/98 % KRL by weight		Grind and vacuum RS 5935 or RS 5945	PU 280 2-fold layer PU 235 2-fold layer	approx. 1 hour per layer approx. 4-6 hours per layer					
Cement screeds (CT) with to high residual humidity up to 5 CM%/95 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating, concrete with to high residual humidity up to 7 %/95 % KRL by weight		Grind and vacuum RS 5935 or RS 5945	MS 330	approx. 1 hour					
Cement screeds (CT), concrete with insufficient surface stability		Grind and vacuum RS 5935 or RS 5945	PU 280 *1 PU 235 *1 MS 330 *1	approx. 1 hour approx. 4-6 hours approx. 1 hour					
Cement screeds (CT) with to high residual humidity up to 5 CM%/95 % KRL without underfloor heating, up to 3 CM%/85 % KRL with underfloor heating		Grind and vacuum RS 5935 or RS 5945	D 3080 1:1 with water then D 3080 undiluted	at least 30 minutes at least 120 minutes					Z 615 Z 625 Z 630 Z 635 Z 675 Z 680 Z 715 Z 515
Cement screeds (CT), concrete, calcium sulfate screeds (CA), magnesite sceeds (MA) or mastic asphalt screeds (AS) sufficient load-bearing but with cracks or not homogeneous (different pavings)		Grind and vacuum RS 5935 or RS 5945	PU 280 PU 235 MS 330 *2	approx. 1 hour approx. 4-6 hours approx. 1 hour	MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	EM 140 *1 RP 104 *1 RP 107 *1 RP 109 *1 RP 115 *1 RP 704 *1		Z 615 Z 625 Z 630 Z 515
Old, finished floors, permanent existing only tiles, wood planks, linoleum, parquet		Cleaning tiles with R 4515, sand entire surface RS 5935 or RS 5945			MS 230 MS 232 MS 260 MS 262 MS 290 MS 292	PU 210 PU 225 PU 385 PU 215 *E PU 220 *E	EM 140 RP 104 RP 107 RP 109 RP 115 RP 704		

The applicable standards and fact sheets must be heeded with all laying operations.

Please note:
*1 For underfloor heating please consult Wakol technical support
*2 Direct installation only with MS Parquet Adhesives

*E All mentioned products are very low in emissions, except for *E

EMICODE

EMICODE is a trademark-protected seal for product classification for modern, solvent-free and low-emission laying materials and construction products. These include, amongst others:

- Liquid products (coatings, primers, sealer- or barrier primers ready-to-use fluid fixations and adhesives, fluid sealings)
- Powdery products (cement and calcium-sulphate based levelling compounds, quick cement, screed, cement and calcium-sulphate based screed binders tile adhesive and joint mortar, mineral barrier coatings, cement and calcium-sulphate based screeds and screed binders)
- Pasty products and products with a high organic binder content (1-C or 2-C pasty flooring-, parquet and ready-to-use tile-adhesives, assembly adhesives, pasty fixations, dispersion- and reactive levelling compounds)
- Products which do not require a chemical reaction or physical drying (Underlay systems, e.g. insulating underlays, underlays with an adhesive coating, adhesive tapes, chipboards, decoupling-/insulating sheets)
- Sealing tapes and collars for small surfaces (e.g. for window, facade, in wet areas); Sealing membranes for large surfaces (e.g. for walls and floor in wet areas), vapour retarder under the roof

The inspection symbol for environmental and interior hygiene has been awarded since 1997 by the GEV (German Registered Association for the Control of Emissions in Products for Flooring Installation) to products of manufacturers who subject themselves to strict quality controls and regular inspections. With regard to consumer and processor protection, EMICODE provides an orientation aid for the assessment and selection of chemical construction products. The classification system is aimed at planners, consumers and tradesmen, is company-independent and competitively neutral.

The EMICODE breaks down into the following 3 emission classes, based on the strictly defined GEV test method (emissions test chamber) and the GEV classification criteria:

EMICODE EC1 PLUS	very low emission level PLUS
EMICODE EC1	very low emission level
EMICODE EC2	low emission level

Especially important is the best emission class, EMICODE EC1 PLUS. The TVOC thresholds for this class after 28 days are defined as follows:

EMICODE EC1 PLUS for primers, for levelling compounds and for adhesives as well as subfloors ≤ 60 µg/m³.

For details, see: www.emicode.com

Many Wakol line products correspond to the best emission class, EMICODE EC1. They are subjected to especially strict controls according to DIN EN ISO 9001:2015, from the raw material stage to manufacture, with respect to their emission characteristics as well as their superb, technical functionality.

Status 12/19

Blue Angel

The Blue Angel is awarded for different product categories in accordance with respectively adjusted inspection criteria. Laying materials are inspected in accordance with RAL-UZ 113. After an external inspection of the emission characteristics and fulfilment of other conditions regarding content and container or datasheet information, the Blue Angel licence is awarded by the German Institute for Quality Assurance and Marking (RAL). Marking with the Blue Angel is voluntary. For laying materials, in accordance with RAL-UZ 113 there are Blue Angel criteria for products with low VOC emissions to interior air and thus with little effect on human health. For private end consumers, it is the most widely known eco-label. The requirements of the EMICODE EC1 and of the Blue Angel are comparable. EMICODE EC1 PLUS specifies the highest requirements with regard to low-emission laying materials, www.blauer-engel.de/en/products/construction/bodenbelagsklebstoffe.

French VOC regulations

The French regulations on VOC emissions classes stipulate that from 1 January 2012 all construction products, flooring and wall surfaces, paints and lacquers used indoors must be marked with their emissions class. Categorisation of the emissions classes is to be on the basis of specified limit values and is the responsibility of the manufacturer. The marking on the product states the highest (worst) of the emissions classes determined for the VOCs and for the TVOC. Equivalent data on the emissions, for example from inspections for AgBB, EMICODE, Blue Angel etc. will be accepted. For details, see www.wakol.de.

TRGS 610/Regulations on hazardous substances

The German regulations on hazardous substances (GefStoffV) comprehensively regulate the categorisation, marking and handling of all kinds of hazardous substances (www.baua.de/de/Themen-von-A-Z/Gefahrstoffe/Rechtstexte/Gefahrstoffverordnung.html). The Technical Regulations on Hazardous Substances (TRGS) define the requirements of the regulations on hazardous substances for trades. Compliance with the TRGS means the requirements of the regulations on hazardous substances are fulfilled.

The TRGS 610 Alternative materials and alternative procedures for high solvent-based primers and adhesives for floorings have been updated. In accordance with the TRGS 610, solvent-free dispersion adhesives, SMP/MS adhesives and solvent-free PU adhesives are recommended as possible alternatives.

In individual cases, the use of high solvent-based adhesives of the GISCODE Category S 0.5 (or better, such as VOC Control) may be necessary for the full bonding of parquet flooring. In event of use of these evidently less suitable alternatives, the workplace limit values and total limit values are complied with.

The full text of the TRGS 610 can be found at: www.wakol.de

GISCODE

GISCODE is a classification system agreed on in 1993 by manufacturers and German Builders' Trade Associations (GISBAU) for distinguishing product groups with certain common hazardous features. The system is exclusively geared to occupational safety and in large parts refers to the 4 product categories of the TRGS 610.

D1	solvent-free dispersion-based floor laying substances
GG60	basic cleaner, irritant (including eye damage), solvent-based with 2-butoxyethanol
RS10	Laying materials containing methoxysilane
RU1	solvent-free polyurethane floor laying substances
S1	high solvent level floor laying substances, non-aromatic and methanol-free
CP1	Calcium sulfate based levelling compounds
ZP1	Cement-based products, low in chromate

The classification according to GISCODE, e.g. on container labels, in product information and on safety data sheets, is carried out voluntarily in particular by member companies of the adhesive industrial association „Klebstoffe e.V.“ For all GISCODE product groups the corresponding product information and sample operational instructions are available from the construction professional associations. See www.wingisonline.de

Status 12/19

CE mark

The CE mark is a producer label, stating that the product complies with a harmonised European norm. For levelling compounds this is conformity with DIN EN 13813 „Screed material and floor screeds“. Using the CE mark a high level of transparency concerning important product properties. Each CE labelled product must meet all

labelled criteria. The values therefore are always minimum values. According to the European Construction Products Regulation (EU 305/2011) a Declaration of performance has to be provided by the manufacturer for each CE labelled product. The declaration of performance can be found at www.wakol.de.

Mark of conformity

The mark of conformity (Ü-Zeichen) designates laying materials that fulfil the relevant technical specifications of the building authorities. In Austria known as the „ÜA-Einbauzeichen“. General building authority approvals are granted for construction products and methods in the area of application as defined by the state building authorities. They are reliable proof of the usability of construction products. The German Institute for Building Technology (DIBt) is the German licensing authority for general building authority approvals for construction products.

For reasons of health protection, since 01.01.2011 adhesives for parquet and wooden flooring require general building authority approval for their use in habitable rooms (cf. Building Regulation List B Part 1, ser. no. 1.18.3 and Appendix 1/18.3). On 01.01.2012 approval for adhesives for floorings and underlays became a mandatory requirement.

Wheelmark

The Wheelmark is a mark of conformity valid throughout the EU, confirming suitability of the respective product for marine equipment in accordance with Council of the European Community Directive 2014/90/EU on marine equipment (EC Marine Equipment Directive – MED). To obtain this mark of conformity, a defined fire test must be passed. In addition to this EC

type examination, monitoring measures carried out by an accredited body are required, e.g. a quality management system as per Module D. The support organisation for the Wheelmark is the IMO, International Maritime Organisation, an affiliate organisation of the UNO. The declaration of conformity for the corresponding products can be found at www.wakol.de.

Environmental Product Declaration, EPD

An EPD is a data set which attempts to compile all environmentally relevant information/data like resource consumption and emissions to a product over the complete product life cycle. These are approx. 100 individual data. Starting point for making an EPD is the so called ecological balance sheet, thus a systematic analysis on the environmental impact of products during their complete life cycle. This is why it is also called life cycle analysis. The basic procedure for making such product declarations is partly regulated and expressed by standardized norms, e.g. EN 15804.

In order to compile these extensive data, assumptions, average values, estimations are made according to the product division.

The ISO-Type-III-Declaration according to DIN EN ISO 14025 has been created in cooperation with the Institute for Construction and Environment (Institut für Bauen und Umwelt e.V.). With these quantitative statements about the environmental performance of building products, EPDs are also used for certification of buildings, keyword “sustainable building“. In Germany, buildings are certified for example by the DGNB (Deutsche Gesellschaft für nachhaltiges Bauen = German sustainable building council). Depending on the fulfillment of the criteria, the DGNB awards certificates in gold, silver or bronze.



For more information:

CONNECTED SYSTEMS FOR LOBADUR FINISHES

Connected Systems stands for harmonised system solutions from Loba and Wakol. Due to an intensive cooperation and the exchange of experiences in product development, our products go through a mutually agreed verification and validation process, which guarantees optimal security for laying.


		WAKOL																		
		1K PARQUET ADHESIVE										2K PARQUET ADHESIVE								
		D 1640	D 1690	MS 228	MS 230	MS 232	MS 260	MS 261 1)	MS 262	MS 290	MS 292	PU 385	PU 210	PU 215	PU 216 2)	PU 220	PU 225			
LOBA LOBADUR	1K FINISH	EasyFinish	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		
		Viva	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
		Life	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
		OptiFinish	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		
		Hybrid	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		
	2K FINISH	InvisibleProtect	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		
		Supra	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
		Duo	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
		Fusion	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		
		Rush	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		

1) only available in Italy 2) only available in the Netherlands and Belgium



Actual information:

CONNECTED SYSTEMS FOR LOBASOL OILS



CONNECTED
SYSTEMS

		WAKOL															
		1K PARQUET ADHESIVE										2K PARQUET ADHESIVE					
		D 1640	D 1690	MS 228	MS 230	MS 232	MS 260	MS 261 1)	MS 262	MS 290	MS 292	PU 385	PU 210	PU 215	PU 2162)	PU 220	PU 225
LOBA LOBASOL OIL	2K ImpactOil	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	2K ImpactOil Color	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	Akzent 100 Oil	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	HardwaxOil EcoPlus	✓	✓				✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
	Markant	✓	✓							✓	✓	✓	✓	✓	✓	✓	✓
MarkantColor	✓	✓							✓	✓	✓	✓	✓	✓	✓	✓	
MarkantNature	✓	✓							✓	✓	✓	✓	✓	✓	✓	✓	

1) only available in Italy 2) only available in the Netherlands and Belgium









Your advantages:

- Exclusion of chemical reaction between oil and adhesive
- Prevents dark inlets in the area of head joints

Status January 2020 | Updates can be found at www.loba.de/en and www.wakol.com. Professional use of the listed Connected Systems products is a key factor for successful results. Please take note of the respective technical data sheets of the products used.





































Symbols

The symbols describe the properties and applicability of the individual products:

			
Very low in emissions according to EMICODE EC1 PLUS	Very low in emissions according to EMICODE EC1	Laying materials with low emissions according to RAL-UZ 113	Emissions class i.a.w. French law
			
Classification systems in accordance with GISBAU	Solvent free according to TRGS 610	Product with VOC-Control technology	CE marking Council Directive 305/2011 EU
			
Emissions-tested building product in accordance with DIBt guidelines	Wheelmark Certification Council Directive 2014/90/EU	CONNECTED SYSTEMS Guarantee with Loba paints and/or oils	Suitable for underfloor heating
			
Suitable for wheelchairs	Conductive product	Internet link to the product	

Trowel Notch Sizes

A good adhesive adheres even better when used with the right applicator. Below is the selected series of notch sizes determined by the Technical Commission on Construction Adhesives (TKB). Notched trowels and strips according to the uniform TKB designation are supplied by all leading tool manufacturers.

 Notch depth mm		 Notch width mm		 Notch bridge width mm		 Angle °								
Group A		   					Group C		   					
A 1		1,1	1,5	0,5	55°				C 2		6,0	6,0	6,0	90°
A 2		1,4	1,7	1,3	55°				C 3		3,0	3,0	3,0	90°
Group B		   					Group S		   					
B 1		2,0	2,4	2,6	55°				S 2		3,35	4,2	0,1	60°
B 2		2,55	3,0	2,0	55°									
B 3		3,25	3,7	3,3	55°				Group R					
B 5		5,15	5,7	14,3	55°				R 2		5,0	4,0	2,0	R
B 11		5,0	6,1	7,9	60°									
B 13		6,5	7,1	11,4	55°									
B 15		6,3	5,6	6,9	45°				Special notch sizes from Pajarito					
B 5 Speciality Trowel Blade		5,15	5,7	14,3	55°				7		4,7	2,8	0,2	
									25		3,8	5,7	0,3	



D 9905602 01/20 99264019 www.mono-d.de

Wakol GmbH
Bottenbacher Str. 30
D-66954 Pirmasens
Tel. +49 6331 8001 131
Fax +49 6331 8001 890
www.wakol.com



WAKOL®
Anspruch verbindet