

wineo

THAT'S FLOORING



wineo 1500

PURLINE ORGANIC FLOORING

**BEST INGREDIENTS FOR
EVERY CHALLENGE**

CONTENT

| | |
|----------------------------|----|
| Best ingredients | 04 |
| The ecuran organic formula | 06 |
| Product advantages | 08 |
| Further product advantages | 10 |
| Lifecycle cost analysis | 12 |
| Application areas | 14 |
| Formats | 16 |
| Surface structures | 17 |
| Product composition | 18 |

Collections

| | |
|--|----|
| wineo 1500 wood XS L XL | 20 |
| wineo 1500 stone XL | 40 |
| wineo 1500 wood ∞ | 44 |
| wineo 1500 chip ∞ | 50 |
| wineo 1500 fusion ∞ fusion XL | 56 |
| wineo 1500 fusion combinations | 60 |

Special solutions

| | |
|------------------------------------|----|
| wineo 1500 special products | 62 |
| wineo 1500 customised | 63 |
| wineo 1500 acoustic ∞ | 64 |
| wineo 1500 safety ∞ | 65 |
| wineo 1500 rail | 66 |
| wineo 1500 sea | 67 |

| | |
|---------------------|----|
| Accessories | 68 |
| Service | 70 |
| Awards and quality | 72 |
| Collection overview | 74 |



BEST INGREDIENTS FOR CREATIVE RESULTS

Unbeatably ecological, limitlessly creative and extremely resilient – that's the new wineo 1500 collection.

wineo PURLINE organic flooring is probably the most ecological, elastic flooring available on the market. Without chlorine, plasticisers or solvents. wineo PURLINE organic flooring impresses not only with its incomparable sustainability, but also with its impressive hard-wearing features and range of designs.

BEST INGREDIENTS FOR BEST RESULTS

wineo PURLINE organic flooring is a high-quality polyurethane flooring solution made from the finest materials. The basis is provided by ecuran, a high-performance composite material that is manufactured primarily from plant-based oils such as canola oil or castor oil and naturally-occurring mineral components such as chalk. wineo PURLINE organic flooring impresses most of all with its sustainability, combined with its extreme hard-wearing features; furthermore, it is truly made in Germany throughout all of its production stages.



CANOLA OR CASTOR OIL

Natural and sustainable – the perfect replacement for plasticisers and crude oil

CHALK

Harmless and particularly fine – an ideal filler



Made with

ecuran

your flooring upgrade

The unique bio-polyurethane from the Windmüller house now has a name: ecuran

ecuran is the sustainable high-performance composite material for sophisticated flooring solutions. It is based on “bio-polyurethane” which is manufactured to a large extent from plant-based oils such as canola oil or castor oil and naturally occurring mineral components such as chalk. Detailed information regarding ecuran can be found here: www.ecuran.de

BEST INGREDIENTS FOR MAXIMUM PERFORMANCE

Sustainable can also be particularly efficient – wineo 1500 not only consists of the best ingredients, but also withstands a lot. It's simply high-efficiency flooring for heavily stressed areas of application.



EXTREMELY DURABLE

Even after 25,000 crossings with 500 kg at 6 km/h, wineo 1500 seems completely unaffected. This was proven by Bielefeld University of Applied Sciences (FH), which even certified the product's suitability for deployment in the light industry. In addition to this, the high-efficiency flooring excels with an outstanding residual indentation behaviour of ~ 0.05 mm in accordance with EN ISO 24343-1.



OUTSTANDINGLY UV-RESISTANT

Compared with other floorings in its class, wineo 1500 has a high light fastness of ≥ 7 . The EN 105 – B02 hereby certifies the presence of excellent UV resistance.



PARTICULARLY TEMPERATURE STABLE

wineo 1500 can also withstand changes in climatic conditions, for example a rise in room temperature. The EN ISO 23999 confirms the high dimensional and thermal stability of the flooring.



ABSOLUTELY ODOUR NEUTRAL

TÜV Proficert, a certification agency, confirms that wineo 1500 flooring remains odour neutral throughout both the installation process and its use thereafter. There are no disturbing odours.



EXCEPTIONALLY ECONOMICAL

Substantial savings can be achieved in terms of cleaning and resource costs. Approximately 30% is saved as a result of extremely low lifecycle costs, making the wineo 1500 exceptionally economical. This was certified by the Pfiff Institute (page 12).

5X BETTER



BEST INGREDIENTS FOR OPTIMUM ATTRIBUTES

wineo 1500 not only looks good in every situation, it can also withstand a lot. That's convincing.



EASY CARE

The polyurethane surface makes the wineo 1500 **easy to clean**.



MINIMAL SMOKE

Even in the event of fire: there are **no toxic gases** and **barely any smoke**.



QUIET

The soft surface ensures pleasantly **quiet acoustics**.



SUITABLE FOR DAMP AREAS

In the kitchen or bathroom: wineo 1500 shows its best side in every situation.



WARM TO THE FEET

The organic flooring **feels pleasantly warm** and is perfect for lounging, playing and living.



GENTLE ON THE ANKLES

Health conscious: The elastic surface is gentle on the joints.



SUITABLE FOR UNDERFLOOR HEATING

More comfort: Installed over underfloor heating, the wineo 1500 provides **additional cozy warmth**.



SLIP RESISTANT

The tested surface ensures **safety with every step**.

BEST INGREDIENTS FOR LOW COSTS

Resistant to chemical and mechanical stresses, environmentally compatible and particularly easy to clean: wineo PURLINE organic flooring's lifecycle costs are considerably lower than those of all other conventional flooring solutions currently on the market. This has also been confirmed by the Memmingen-based Pfiff Institute for applied industrial cleaning technology.


This is especially evident in heavily frequented areas such as medical institutions, department stores, schools, airports or other public buildings. wineo PURLINE organic flooring proves to be particularly hard-wearing and economical.

WHAT THE PFIFF INSTITUTE HAS TO SAY:

- conventional cleaning agents can be used without problems
- the closed surface makes cleaning particularly easy
- additional polishing or initial care is unnecessary
- all surface disinfectants can be used
- various tests demonstrate an effective disinfectability
- contrast agents normally used in hospitals do not discolour the organic PU flooring
- no impressions left by furniture after a brief regeneration
- no visible wear and tear resulting from mechanical stress
- highly resistant to direct sunlight

Source: Pfiff Institute for applied industrial cleaning technology, January 2013

PURLINE
ORGANIC
FLOORING

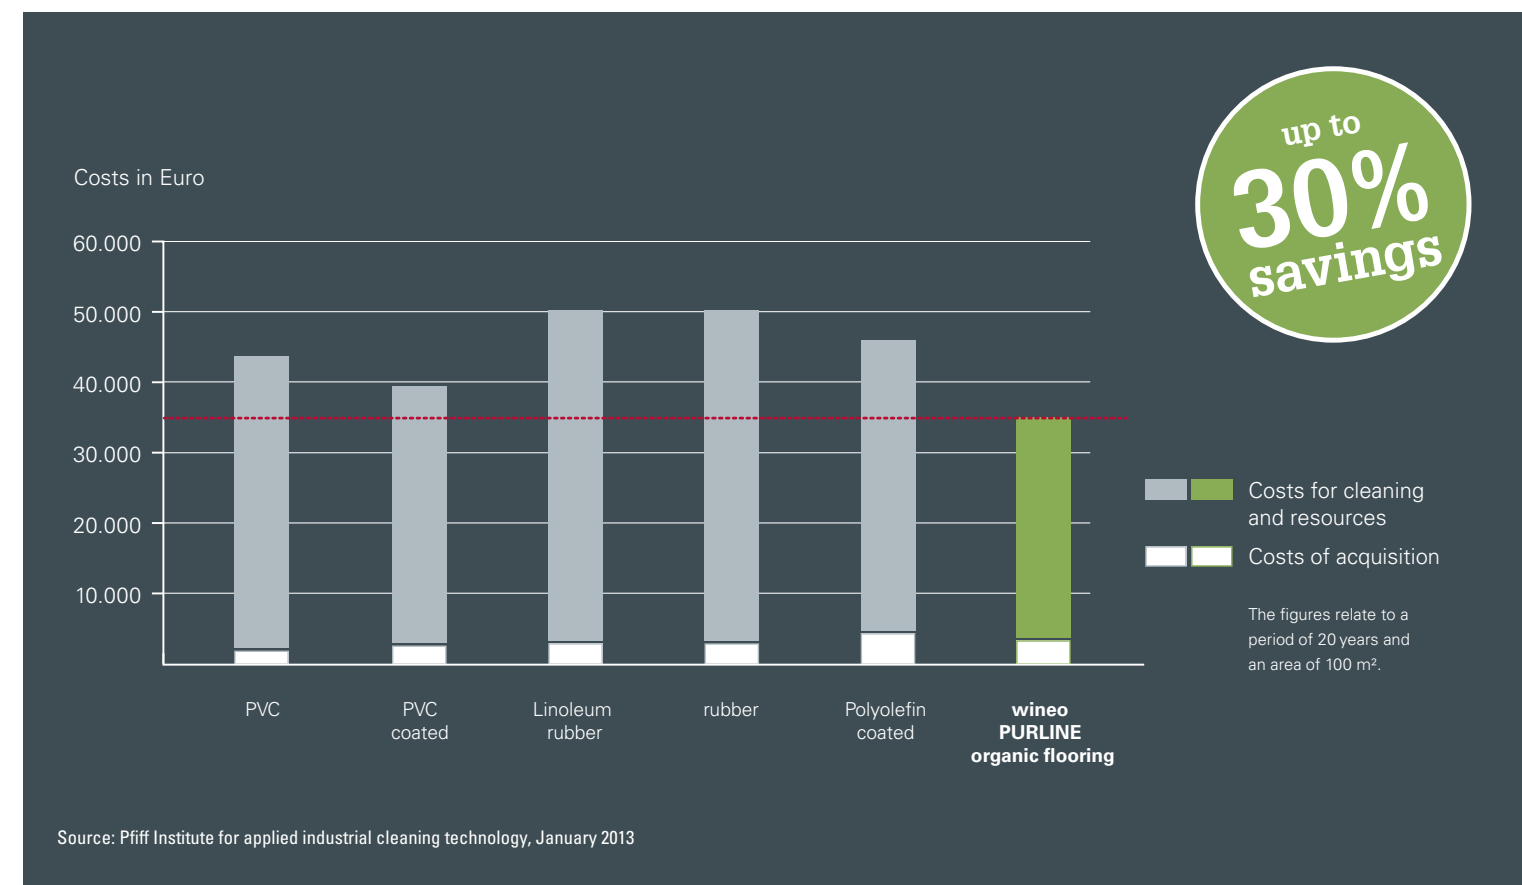

BEST INGREDIENTS FOR EVERY AREA OF APPLICATION

The fitting characteristic for every area of application. Whether special demands are required for hygiene, resilience or design, wineo 1500 is the perfect partner, convincing with its variety of special features and advantages in all areas.



RECOMMENDED FOR
HOTEL + HOSPITALITY

RECOMMENDED FOR
RETAIL + FAIR

RECOMMENDED FOR
HEALTH + CARE

RECOMMENDED FOR
PUBLIC + EDUCATION

THE SUITABLE FORMAT FOR EVERY APPLICATION

Roll format or practical planks? Both have their individual advantages, are extremely practical for renovation work due to their low structural height of 2.5 mm and have ideal installation attributes.



The flooring for large surfaces – delivered in the standard format 20 x 2 m and to be cut simply using a hook blade. For the ideal installation we recommend fibre-based adhesives.



wineo 1500 as a plank or tile solution is an ideal choice when it comes to individual designs. The XS, L and XL formats can be installed together and thereby offer maximum scope for design options.



wood ∞
chip ∞
fusion ∞
acoustic ∞
safety ∞

wood XS

600 x 100 mm

wood L

1200 x 200 mm

wood XL

1500 x 250 mm

stone XL | fusion XL

1000 x 500 mm

THE ORGANIC FLOORING WITH STRUCTURE

wineo 1500 has a variety of surfaces that are coordinated with the designs. The embossed stone and wood structures provide maximum authenticity. Reference to the respective surfaces can be found under the decor illustration on the following collection pages.



Elegant wood structure



Fine wood structure



Pine structure



Slate structure



Soft structure



WINEO 1500 FOR MORE SAFETY

Thanks to its special surface texture, the R10 offers maximum slip resistance and safe standing in every situation.

R10

PRODUCT COMPOSITION


The inner values are, of course, also crucial. wineo 1500 is convincing in this area too with its best ingredients based on the ecuran organic formula. The suitable insulation mat for maximum walking noise reduction is available as an optional extra.

wineo 1500

wood XS | wood L | wood XL | stone XL | wood ∞ | chip ∞ | fusion ∞ | fusion XL | safety



- 1 Top element**
PU-top layer with surface structure, decor paper & stabilisation
- 2 Base layer**
ecuran high-performance composite material
- 3 Backing**
integrated FleeceTEC-System® for easy and comfortable installation



wineo 1500

acoustic ∞



- 1 Top element**
PU-top layer with surface structure, decor paper & stabilisation
- 2 Base layer**
ecuran high-performance composite material
- 3 Insulation mat**
with integrated insulation mat for an impact sound reduction up to 17 dB

Further information regarding wineo 1500 acoustic ∞ can be found on page 64.





wineo 1500
wood XS | L | XL

BEST INGREDIENTS FOR CREATIVE RESULTS


wineo 1500 wood convinces with 36 modern and classic wood designs. The three attractive formats offer a range of creative installation options, which range from fish bone to extravagant installation designs.

wineo 1500 wood XS

- Installation type: Glue
- Format: 600 × 100 mm
- Product thickness: 2.5mm
- Content / box: 28/1.68m²



Installed area with the Garden Oak and Island Oak Moon example.

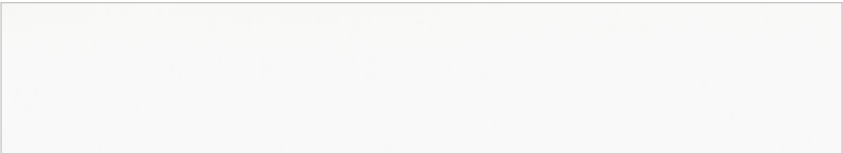

Pure White | PL025C | Elegant wood structure Skirting board 14.5/50: 30060432



Pure Black | PL194C | Elegant wood structure Skirting board 14.5/50: 30060598



Garden Oak | PL005C | Elegant wood structure Skirting board 14.5/50: 30060411



Island Oak Moon | PL045C | Elegant wood structure Skirting board 14.5/50: 30060519



Garden Oak | Island Oak Moon
wineo 1500 wood XS | PL005C
wineo 1500 wood XS | PL045C

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Installed area Wild Wood



Wild Wood | PL100C | Soft structure

Skirting board 14.5/50: 30060614

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200mm
Product thickness: 2.5mm
Content / box: 20/4.8m²



Installed area Uptown Pine



Uptown Pine | PL083C | Fine wood structure

Skirting board 14.5/50: 30060613



Installed area Noble Elm



Noble Elm | PL081C | Fine wood structure

Skirting board 14.5/50: 30060611

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200 mm
Product thickness: 2.5 mm
Content / box: 20/4.8m²



Installed area Canyon Oak with the Canyon Oak Sand example.



Canyon Oak Sand | PL075C | Elegant wood structure Skirting board 14.5/50: 30060606



Canyon Oak Honey | PL076C | Elegant wood structure Skirting board 14.5/50: 30060607

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200 mm
Product thickness: 2.5 mm
Content / box: 20/4.8m²



Installed area Classic Oak with the Classic Oak Winter example.



Classic Oak Winter | PL074C | Elegant wood structure Skirting board 14.5/50: 30060605



Classic Oak Autumn | PL073C | Elegant wood structure Skirting board 14.5/50: 30060604



Classic Oak Summer | PL072C | Elegant wood structure Skirting board 14.5/50: 30060603



Classic Oak Spring | PL071C | Elegant wood structure Skirting board 14.5/50: 30060602

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200 mm
Product thickness: 2.5 mm
Content / box: 20/4.8 m²



Installed area Supreme Oak with the Supreme Oak Grey example.



Supreme Oak Grey | PL070C | Fine wood structure Skirting board 14.5/50: 30060601



Supreme Oak Silver | PL069C | Fine wood structure Skirting board 14.5/50: 30060600



Supreme Oak Natural | PL068C | Fine wood structure Skirting board 14.5/50: 30060599

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200 mm
Product thickness: 2.5 mm
Content / box: 20/4.8 m²



Installed area Polar Pine



Polar Pine | PL082C | Pine structure Skirting board 14.5/50: 30060612



Installed area Pure Pine



Pure Pine | PL079C | Pine structure Skirting board 14.5/50: 30060610

wineo 1500 wood L

Installation type: Glue
Format: 1200 × 200 mm
Product thickness: 2.5 mm
Content / box: 20/4.8 m²



Mixed Decors = various plank colours in one box



Silver Pine Mixed (Installed area) | PL078C | Pine structure

Skirting board 14.5/50: 30060609



Golden Pine Mixed (Installed area) | PL077C | Pine structure

Skirting board 14.5/50: 30060608



Golden Pine Mixed
 wineo 1500 wood L | PL077C

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Crystal Pine | lacquered circumferential joint



Crystal Pine | PL098C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060628

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Native Ash | lacquered circumferential joint



Native Ash | PL099C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060629



Installed area Crafted Oak | lacquered circumferential joint



Crafted Oak | PL080C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060630

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Fashion Oak with the Fashion Oak Cream example | lacquered circumferential joint



Fashion Oak Cream | PL092C | Elegant wood structure | lacquered circumferential joint Skirting board 14.5/50: 30060622



Fashion Oak Natural | PL091C | Elegant wood structure | lacquered circumferential joint Skirting board 14.5/50: 30060621



Fashion Oak Grey | PL093C | Elegant wood structure | lacquered circumferential joint Skirting board 14.5/50: 30060623

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Queen's Oak with the Queen's Oak Pearl example | lacquered circumferential joint



Queen's Oak Pearl | PL097C | Elegant wood structure | lacquered circumferential joint Skirting board 14.5/50: 30060627



Queen's Oak Amber | PL096C | Elegant wood structure | lacquered circumferential joint Skirting board 14.5/50:30060626

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Western Oak with the Western Oak Cream example | lacquered circumferential joint



Western Oak Cream | PL094C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060624



Western Oak Desert | PL095C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060625

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Royal Chestnut with the Royal Chestnut Grey example | lacquered circumferential joint



Royal Chestnut Grey | PL084C | Fine wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060615



Royal Chestnut Desert | PL085C | Fine wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060616



Royal Chestnut Mocca | PL086C | Fine wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060617

wineo 1500 wood XL

Installation type: Glue
Format: 1500 × 250mm
Product thickness: 2.5mm
Content / box: 12/4.5m²



Installed area Village Oak with the Village Oak Grey example | lacquered circumferential joint



Village Oak Grey | PL089C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060620



Village Oak Cream | PL087C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060618



Village Oak Brown | PL088C | Elegant wood structure | lacquered circumferential joint

Skirting board 14.5/50: 30060619



Village Oak Brown
 wineo 1500 wood XL | PL088C



wineo 1500
stone XL

BEST INGREDIENTS FOR MORE STYLE

Classic marble, modern copper and varying industrial designs come together with stylish decors to form the wineo 1500 stone XL. In the modern format 1000 x 500 mm the tiles create a very special atmosphere.

wineo 1500 stone XL

Installation type: Glue
Format: 1000 × 500 mm
Product thickness: 2.5 mm
Content / box: 10/5 m²



Timeless Travertine (Installed area) | PL106C | Soft structure



Urban Copper (Installed area) | PL103C | Soft structure



Just Concrete (Installed area) | PL101C | Soft structure



Carpet Concrete (Installed area) | PL102C | Soft structure

wineo 1500 stone XL

Installation type: Glue
Format: 1000 × 500 mm
Product thickness: 2.5 mm
Content / box: 10/5 m²



Raw Industrial (Installed area) | PL104C | Soft structure



Grey Marble (Installed area) | PL105C | Soft structure



Scivaro Slate (Installed area) | PL038C | Slate structure



White Marble (Installed area) | PL090C | Soft structure



wineo 1500
wood ∞

BEST INGREDIENTS FOR GOOD BUSINESS

Warm, natural, primal – wineo 1500 wood ∞ includes 8 wood designs for every requirement. From classic oak and walnut to exotic wood designs for a warm and pleasant atmosphere.

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5mm
Content / box: 1/40m²



Floating Wood Snow | PLR133C | Soft structure



Floating Wood Sand | PLR134C | Soft structure

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5mm
Content / box: 1/40m²



Napa Walnut Cream | PLR135C | Fine wood structure



Napa Walnut Brown | PLR136C | Fine wood structure

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5mm
Content / box: 1/40m²



Halifax Oak | PLR036C | Fine wood structure



Pacific Oak | PLR037C | Fine wood structure

wineo 1500 wood ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5mm
Content / box: 1/40m²



Cottage Oak | PLR038C | Fine wood structure



Missouri Oak | PLR039C | Fine wood structure




wineo 1500
chip ∞

BEST INGREDIENTS FOR CONVINCING HIGHLIGHTS

Whether plainly coloured, strongly or slightly chipped, in muted beige and grey tones or as a colourful highlight: With 24 designs the wineo 1500 chip ∞ effectively makes its mark.

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Pure White | PLR025C | Soft structure



Pure White Stars | PLR123C | Soft structure



Sinai Sand | PLR002C | Soft structure



Sinai Sand Stars | PLR130C | Soft structure



Melange | PLR003C | Soft structure



Cappuccino | PLR004C | Soft structure

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Light Grey | PLR021C | Soft structure



Steel Grey | PLR023C | Soft structure




Silver Grey | PLR022C | Soft structure



Silver Grey Stars | PLR124C | Soft structure



Midnight Grey | PLR024C | Soft structure

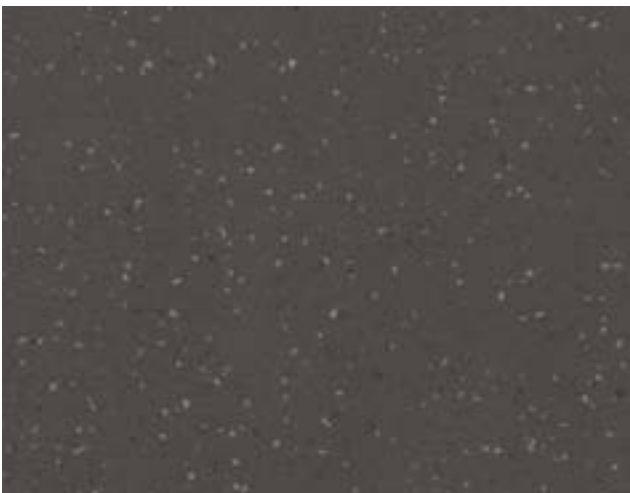

Midnight Grey Stars | PLR126C | Soft structure

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²



Honey Mustard | PLR128C | Soft structure



Terracotta Dark | PLR009C | Soft structure



Red Rubin | PLR011C | Soft structure



Apple Green | PLR185C | Soft structure



Racing Green | PLR019C | Soft structure



Jungle Green | PLR018C | Soft structure

wineo 1500 chip ∞

Installation type: Glue
Format: 20 × 2 m
Product thickness: 2.5 mm
Content / box: 1/40 m²




Purple Rain | PLR013C | Soft structure



Summer Sky | PLR014C | Soft structure



Navi Blue | PLR129C | Soft structure

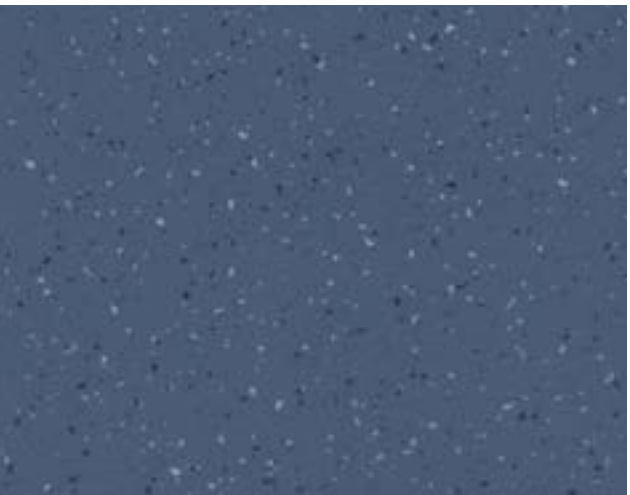

Navi Blue Stars | PLR131C | Soft structure



Denim Blue Stars | PLR132C | Soft structure



Pure Black Stars | PLR127C | Soft structure



wineo 1500
fusion ∞ | fusion XL

BEST INGREDIENTS FOR SUITABLE DESIGNS

Especially adapted to the needs of architects and planners, the wineo 1500 fusion offers the matching grey tone for all furnishing concepts. Whether light or dark tones, summerly warm or pleasantly cool – the 16 different designs distinguish themselves and integrate perfectly into the existing colour concept of your room.

wineo 1500 fusion is available as a roll (fusion ∞) and as a tile (fusion XL). Thanks to our **match guarantee** you will always find the matching decor even for particularly challenging furnishing elements. Guaranteed.

cool pure warm bright

one

cool.one

PLR107C (Roll) | 20 × 2 m
PL107C (Tile) | 1000 × 500 mm

pure.one

PLR111C (Roll) | 20 × 2 m
PL111C (Tile) | 1000 × 500 mm

warm.one

PLR119C (Roll) | 20 × 2 m
PL119C (Tile) | 1000 × 500 mm

bright.one

PLR115C (Roll) | 20 × 2 m
PL115C (Tile) | 1000 × 500 mm

one

two

cool.two

PLR108C (Roll) | 20 × 2 m
PL108C (Tile) | 1000 × 500 mm

pure.two

PLR112C (Roll) | 20 × 2 m
PL112C (Tile) | 1000 × 500 mm

warm.two

PLR120C (Roll) | 20 × 2 m
PL120C (Tile) | 1000 × 500 mm

bright.two

PLR116C (Roll) | 20 × 2 m
PL116C (Tile) | 1000 × 500 mm

two

three

cool.three

PLR109C (Roll) | 20 × 2 m
PL109C (Tile) | 1000 × 500 mm

pure.three

PLR113C (Roll) | 20 × 2 m
PL113C (Tile) | 1000 × 500 mm

warm.three

PLR121C (Roll) | 20 × 2 m
PL121C (Tile) | 1000 × 500 mm

bright.three

PLR117C (Roll) | 20 × 2 m
PL117C (Tile) | 1000 × 500 mm

three

four

cool.four

PLR110C (Roll) | 20 × 2 m
PL110C (Tile) | 1000 × 500 mm

pure.four

PLR114C (Roll) | 20 × 2 m
PL114C (Tile) | 1000 × 500 mm

warm.four

PLR122C (Roll) | 20 × 2 m
PL122C (Tile) | 1000 × 500 mm

bright.four

PLR118C (Roll) | 20 × 2 m
PL118C (Tile) | 1000 × 500 mm


four

wineo 1500
fusion combinations

BEST INGREDIENTS FOR
CLASSY HIGHLIGHTS

The two graphic decors, flowers and ornaments, provide extra highlights. These were colour composed based on the decors in the fusion matrix. In this way, every colour row develops a light and a dark decor variant that you can combine perfectly with all decors from the fusion collection.

We would be happy to advise you.

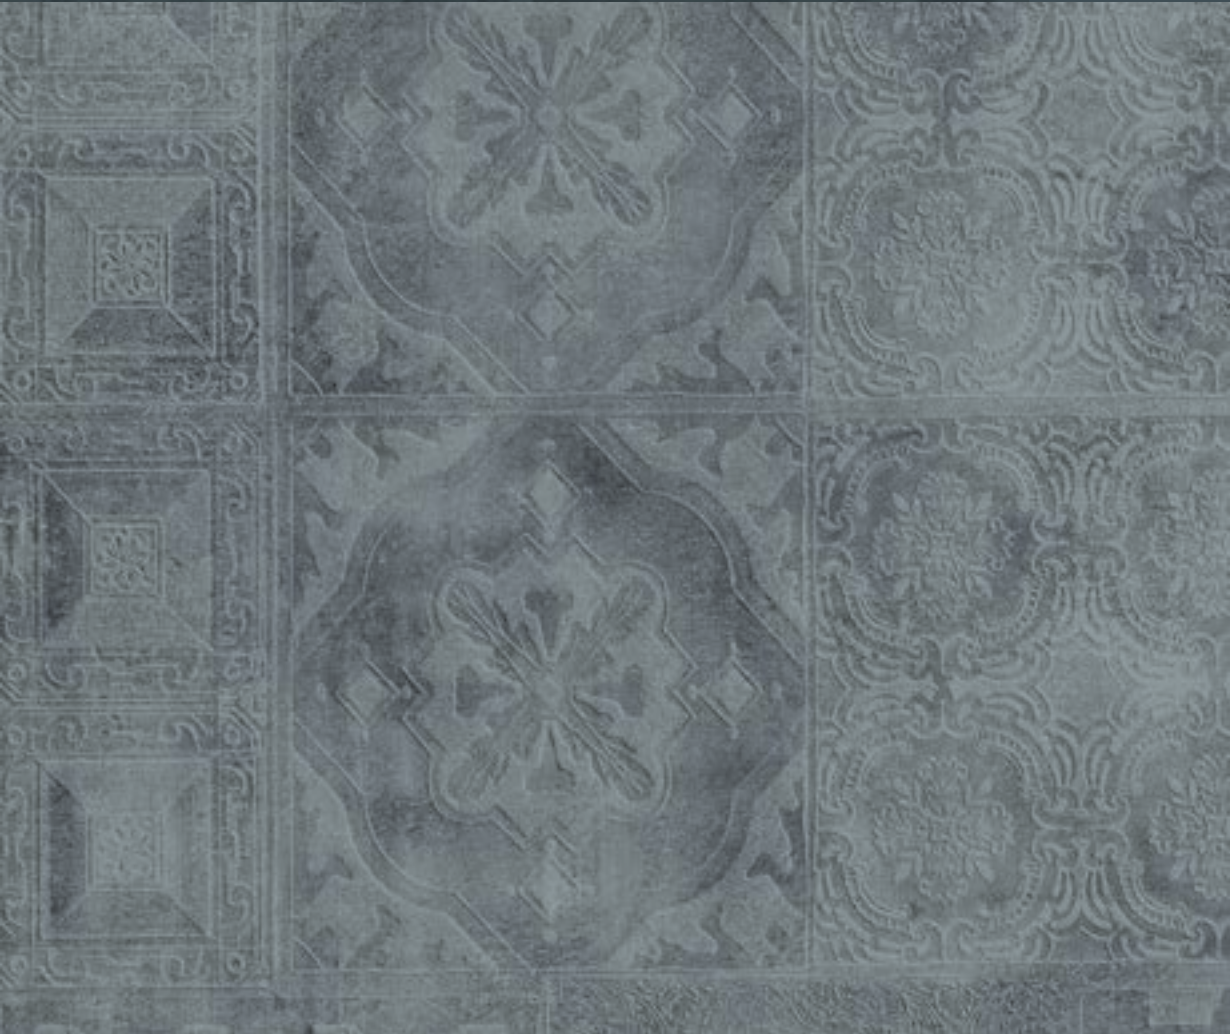





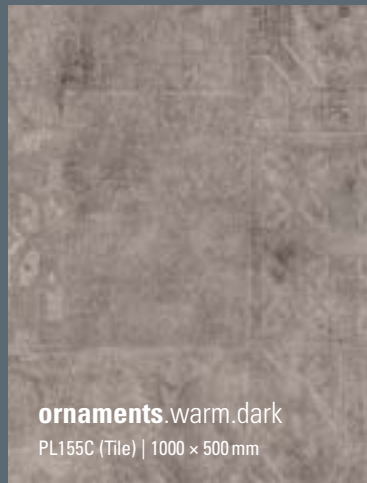
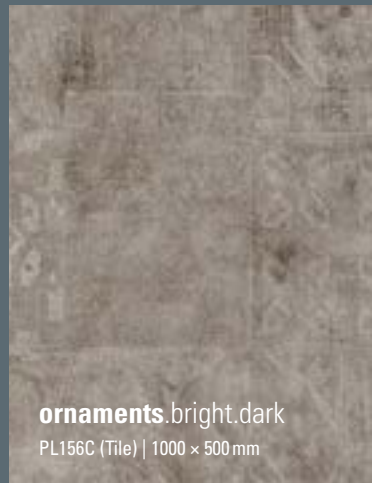


cool pure warm bright

flowers

| | | | |
|--|--|--|--|
|  <p>flowers.cool.light PL137C (Tile) 1000 × 500 mm</p> |  <p>flowers.pure.light PL142C (Tile) 1000 × 500 mm</p> |  <p>flowers.warm.light PL143C (Tile) 1000 × 500 mm</p> |  <p>flowers.bright.light PL144C (Tile) 1000 × 500 mm</p> |
|  <p>flowers.cool.dark PL138C (Tile) 1000 × 500 mm</p> |  <p>flowers.pure.dark PL146C (Tile) 1000 × 500 mm</p> |  <p>flowers.warm.dark PL147C (Tile) 1000 × 500 mm</p> |  <p>flowers.bright.dark PL148C (Tile) 1000 × 500 mm</p> |

ornaments
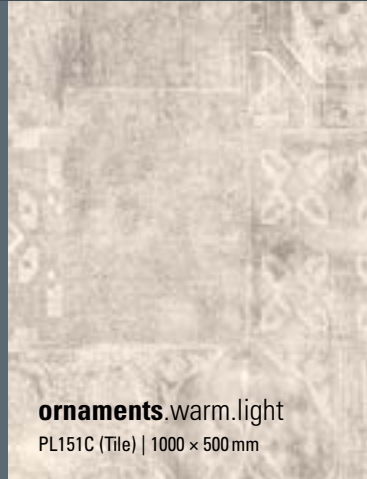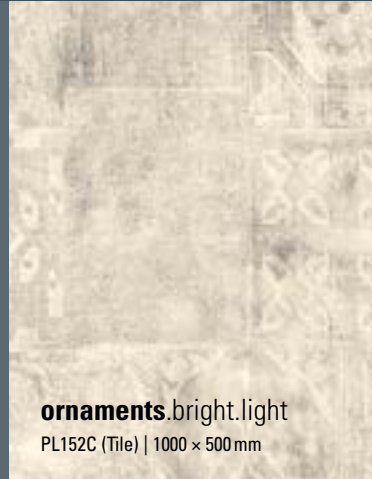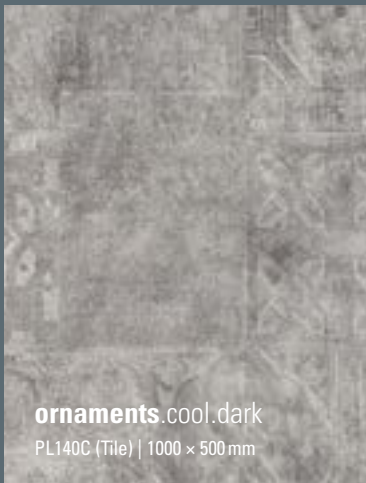
| | | | |
|--|--|--|--|
|  <p>ornaments.cool.light PL139C (Tile) 1000 × 500 mm</p> |  <p>ornaments.pure.light PL150C (Tile) 1000 × 500 mm</p> |  <p>ornaments.warm.light PL151C (Tile) 1000 × 500 mm</p> |  <p>ornaments.bright.light PL152C (Tile) 1000 × 500 mm</p> |
|  <p>ornaments.cool.dark PL140C (Tile) 1000 × 500 mm</p> |  <p>ornaments.pure.dark PL154C (Tile) 1000 × 500 mm</p> |  <p>ornaments.warm.dark PL155C (Tile) 1000 × 500 mm</p> |  <p>ornaments.bright.dark PL156C (Tile) 1000 × 500 mm</p> |

BEST INGREDIENTS FOR SPECIAL REQUIREMENTS


Extraordinary assignments require extraordinary solutions. That is why wineo 1500 is also available in other special variants – always individually made to measure for the respective area of application.

| PRODUCT | | | | | | |
|----------------------|------------|-----------------------|-----------------------|---------------------|-----------------|----------------|
| AREAS OF APPLICATION | wineo 1500 | wineo 1500 customised | wineo 1500 acoustic ∞ | wineo 1500 safety ∞ | wineo 1500 rail | wineo 1500 sea |
| HEALTH + CARE | ✓ | ✓ | ✓ | ✓ | | |
| HOTEL + HOSPITALITY | ✓ | ✓ | ✓ | ✓ | | |
| PUBLIC + EDUCATION | ✓ | ✓ | ✓ | ✓ | | |
| RETAIL + FAIR | ✓ | ✓ | ✓ | ✓ | | |
| MARITIME | | ✓ | | | | ✓ |
| RAILWAY | | ✓ | | | ✓ | |
| HOME + LIVING | ✓ | ✓ | | | | |



wineo 1500 customised


Be it the company logo in the conference room or abstract colours and patterns in the studio, with wineo 1500 customised your creativity will know no bounds. Design the floor you have always wanted, thereby creating your own unique and valuable product.

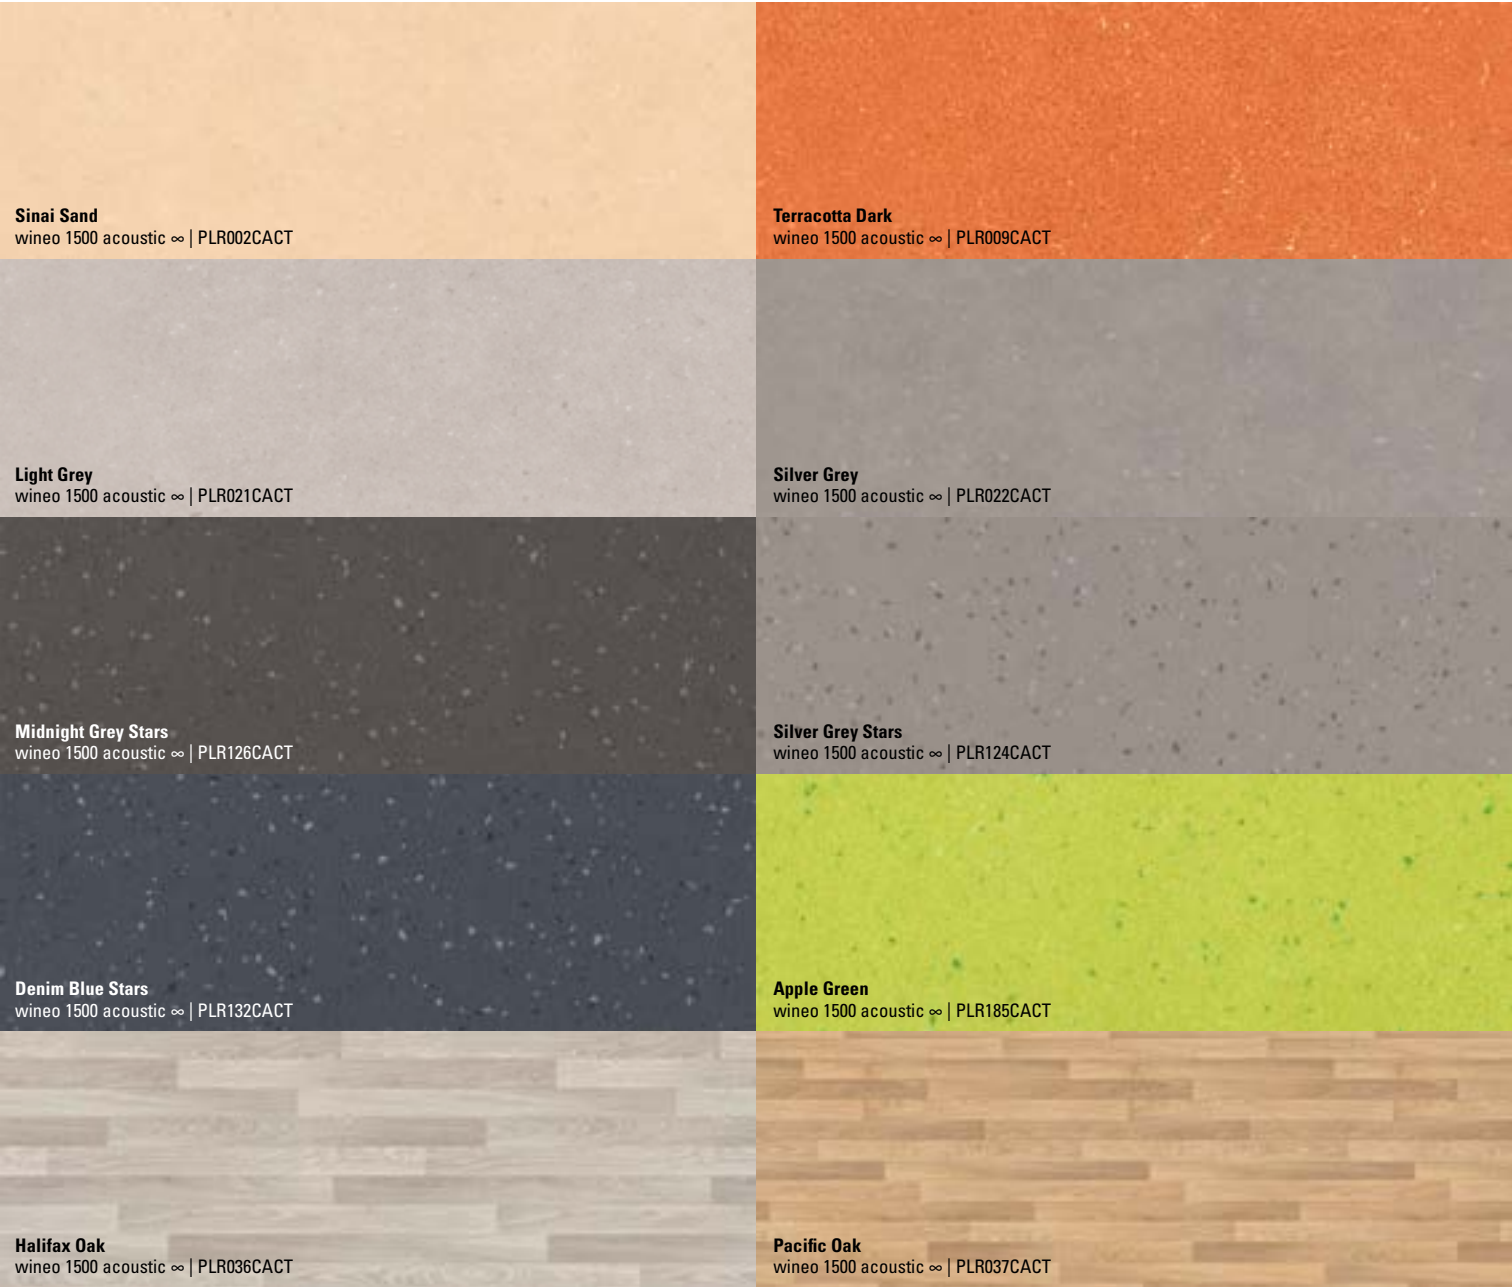

wineo 1500 acoustic ∞



Thanks to the integrated insulation mat in wineo 1500 acoustic ∞, the impact sound is reduced considerably. This makes the flooring particularly suitable for buildings with a high noise level.

You will find the wineo 1500 acoustic ∞ product composition on page 19.

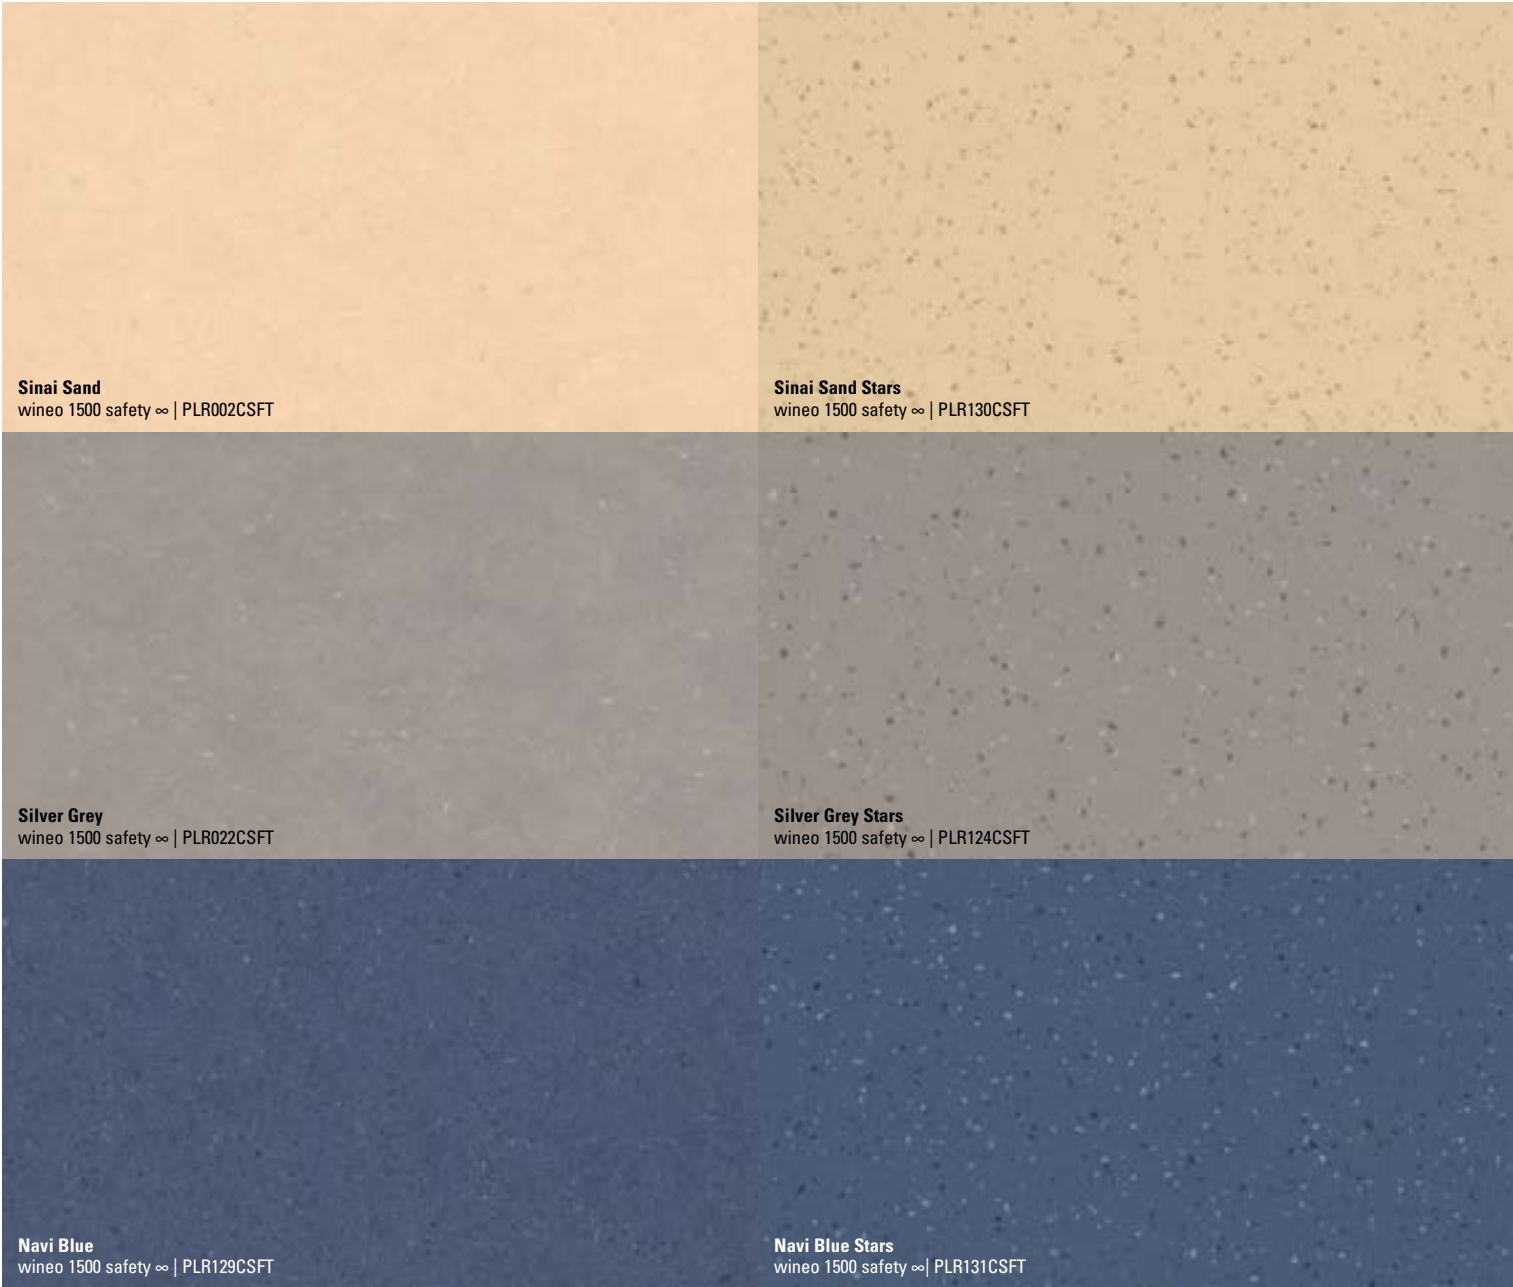

wineo 1500 safety ∞


Whether it's freshly wiped or you are simply in a hurry, wineo 1500 safety ∞ ensures the greatest possible slip resistance with its special surface. It is R10 and A/B certified and is therefore ideal for hotels, hospitals, nursing care facilities, schools or your workplace.

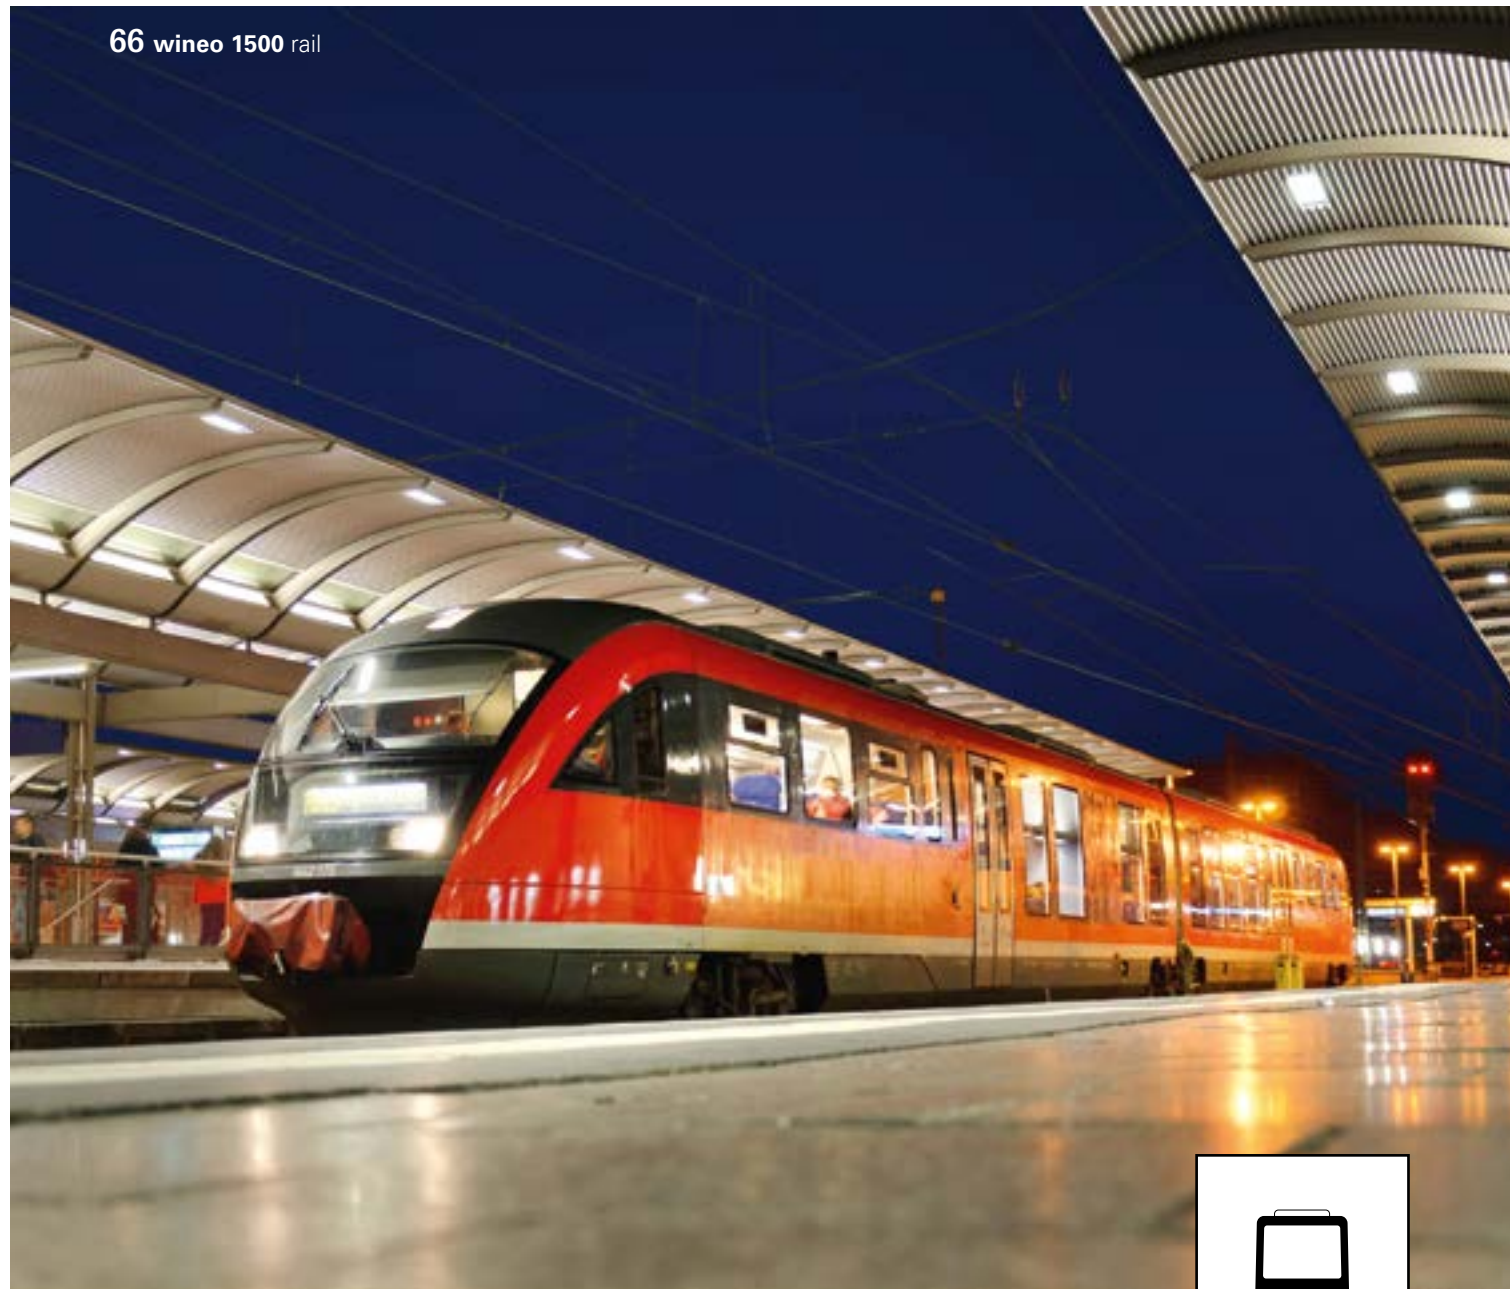

EN 45545
HL 2

wineo 1500 rail

When thousands of people force themselves through the aisles of a train, that means maximum stress for the materials. To deal with these requirements, we have wineo 1500 rail. It is extremely long-lasting and meets all the related safety requirements.



0045
2018

wineo 1500 sea

Modern shipbuilding and progressive offshore facilities require a great deal of technical knowledge as well as reliable and, above all, resilient technologies. With these specific requirements in mind, the flooring brand wineo has developed a special flooring solution: wineo 1500 sea. This product offers ideal attributes in the event of fire and fulfills all safety requirements in accordance with the current IMO regulations.

ACCESSORIES

SKIRTING BOARDS, EXTERNAL CORNERS AND FUSE WIRES

Particularly in sensitive areas such as health and care, in which maximum cleanliness and hygiene are crucial, skirting boards and external corners are indispensable. They connect the wall and the floor perfectly, thereby creating a particularly neat and absolutely impermeable final sealing. Our prefabricated skirting boards and external corners for wineo PURLINE organic flooring are available in every design promoted via the collections and are always manufactured for you on an order basis. The associated PURLINE fuse wires for seamless welding, are also available for every design.

The available dimensions

skirting boards: 100 mm height × 100 mm depth × 2400 mm length

external corners: 100 mm height × 100 mm depth × 130 mm × 130 mm dimension


100 mm

100 mm

2400 mm

100 mm

100 mm

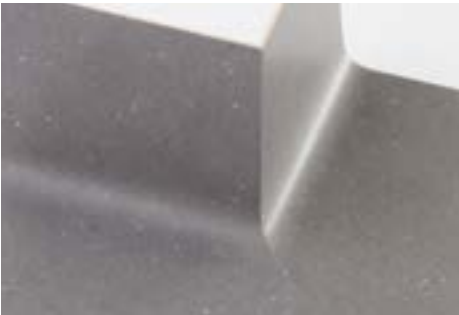

UNDERLAY MATERIAL

We recommend using our silentPREMIUM insulation mat with wineo 1500 – the ideal underlay material **made from up to 90% natural raw materials** for even more comfort and optimum acoustics.

- no additional adhesive necessary due to the self-adhesive surface
- outstanding and long-lasting impact sound qualities
- punctual conformability
- increased ease of installation
- perfect for underfloor heating
- up to utilisation classes 23 and 32

wineo silentPREMIUM insulation mat for wineo 1500

www.blauer-engel.de/uz156

self-adhesive

Impact sound reduction: Up to 13 dB in the system with wineo 1500 for gluing

Art. no. 10020218

DECOR-MATCHING AND PLAIN-COLOURED SKIRTING BOARDS

For the wineo 1500 wood XS, wood L and wood XL our accessories sortiment offers skirting boards optimally suited to the decor. Moreover, plain-coloured skirting boards are available which can be combined universally with all designs. More information on our accessories brochure can be found at en.wineo.de/accessories

CLIPHOLDER FASTENING SYSTEM

For a quick and uncomplicated assembly of the wineo skirting boards, we recommend the clipholder fastening system. It facilitates invisible cable routing and can be moved without problem if you want to do some painting or wallpapering.



Clipholder
Art. no. 30020241
PU = 30 clips/ approx. 15 running metres
Minimum order quantity = 1 PU

SERVICE

We work with distributors, architects, property developers and anyone who appreciates great floor coverings. That's why we offer a wide range of services. If you would like to be kept regularly up to date, just take a look at YouTube, Facebook, Twitter or Pinterest.



TECHNICAL SUPPORT

Do you have any questions about our products, where they can be used or regarding installation? Do not hesitate to contact your distributor, they would be happy to help you.



NEWSLETTER

Stay in touch with us: it's easy to sign up for the wineo newsletter on our website. This will guarantee that you don't miss out on anything and will always be kept up to date.

en.wineo.de/service/newsletter



MARKETING SERVICE

For information and inspiration purposes, we are providing you with an extensive range of patterns and printed matter. You can get an overview of all our presentation tools, from brochures to displays, in our **"ADVERTISING WITH WINEO"** sales promotion brochure. Of course we can also coordinate with you to fulfil your **individual requirements**. Don't hesitate to get in touch!



EN.WINEO.DE

- information and references as well as relevant downloads on the products
- product search by characteristic, colour, format, installation height and utilisation class
- find a retailer
- video portal with plenty of tips and tricks, such as installation instructions



THE BEST QUALITY FOR OVER 70 YEARS

For us, outstanding quality means more than an excellent product. As a family business in its 3rd generation we carry a high level of social and ecological responsibility. That's why we always provide you with the greatest possible level of transparency. And therefore even more safety.

- many quality controls from the initial mixing of the ingredients to the completion stage
- traceability of the exact time of production via a reverse-side overprint
- outstanding attributes regarding durability, maintenance and safety

MADE IN GERMANY



www.blauer-engel.de/uz120

Der Blaue Engel

The "Blaue Engel" guarantees that our products and services fulfill high standards with regard to their environmental, health-related and consumer-friendly characteristics. For every product group, criteria were established which are checked by the German Federal Environmental Agency every three to four years.




TFI-TÜV PROFICERT

The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.



KfB

Award from the competence centre for dynamic processes at Bielefeld University of Applied Sciences (FH). The flooring product Purline has passed the dynamic standard examination of rolling behaviour in accordance with the KfB roadmap.



Österreichisches Umweltzeichen


The "Österreichisches Umweltzeichen" (Austrian eco-label) assesses products from quality, health-related and ecological standpoints. Basically, products can be certified only if they are harmless health-wise. The fulfilment of the criteria is checked every four years.

Mitglied der



DGNB

As a member of the German Sustainable Building Council (DGNB e.V.), wineo is committed to promoting environmental protection, health protection and socio-cultural objectives.



A+

Just like the "Blue Angel" in Germany, the A+ seal identifies our products as ecological, healthy and user-friendly in the French market.



M1

Just like the "Der Blaue Engel" (Blue Angel) quality mark in Germany, the M1 seal in the Finnish market labels our products as environmentally friendly, health-friendly and consumer-friendly. The focus is on emissions of Volatile Organic Compounds (VOCs).



GREENGUARD







The Greenguard certificate ensures that a product fulfills the strictest and most comprehensive requirements for emissions of Volatile Organic Compounds (VOCs) into the air.



Cradle to Cradle®


Cradle to Cradle® certification confirms the utilisation of environmentally safe, healthy and reusable materials (technical reutilisation) and the use of solar power or other regenerative sources of energy, together with responsible water stewardship and strategies adopted by a company to embrace its responsibility to society.

COLLECTION OVERVIEW


| wineo 1500 | wood ∞ chip ∞ fusion ∞ safety ∞ | acoustic ∞ | wood XS | wood L | wood XL | stone XL fusion XL |
|--|---|---|---|---|---|---|
| |  |  |  |  |  |  |
| Installation type | Glue | Glue | Glue | Glue | Glue | Glue |
| Utilisation classes EN ISO 10874 | 23/34/43 | 23/34/41 | 23/34/43 | 23/34/43 | 23/34/43 | 23/34/43 |
| Format | 20 × 2 m | 20 × 2 m | 600 × 100 mm | 1200 × 200 mm | 1500 × 250 mm | 1000 × 500 mm |
| Product thickness | 2.5 mm | 4 mm | 2.5 mm | 2.5 mm | 2.5 mm | 2.5 mm |
| Weight | 3.6 kg / m² | 4.2 kg / m² | 3.9 kg / m² | 3.9 kg / m² | 3.9 kg / m² | 3.9 kg / m² |
| Content / box | 1 / 40 m² | 1 / 40 m² | 28 / 1.68 m² | 20 / 4.8 m² | 12 / 4.5 m² | 10 / 5 m² |
| Boxes / pallet | 6 / 240 m² | 6 / 240 m² | 144 / 241.92 m² | 48 / 230.4 m² | 52 / 234 m² | 50 / 250 m² |
| staining / chemical resistance EN ISO 26987 | very good resistance with regards to concentration and exposure time | | | | | |
| Reaction to fire EN 13501-1 | C _{fl} - s1 | | | | | |
| Anti slip category DIN 51130 | R9 (safety R10) | | | | | |
| Light fastness EN ISO 105-B02 | ~ 7 | | | | | |
| Residual indentation EN ISO 24343-1 | ~ 0.05 mm | ~ 0.15 mm | ~ 0.05 mm | ~ 0.05 mm | ~ 0.05 mm | ~ 0.05 mm |
| Slip resistance EN 13893 | μ ≥ 0.30 DS | | | | | |
| Dimensional stability EN ISO 23999 | ~ 0.05 % | ~ 0.10 % | ~ 0.10 % | ~ 0.10 % | ~ 0.10 % | ~ 0.10 % |
| Flexural behaviour EN ISO 24344 | < 20 mm | | | | | |
| Underfloor heating | Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C. | | | | | |
| Thermal resistance ISO 8302 | ~ 0.01 (m²K) / W | ~ 0.041 (m²K) / W | ~ 0.01 (m²K) / W | ~ 0.01 (m²K) / W | ~ 0.01 (m²K) / W | ~ 0.01 (m²K) / W |
| Effect of a castor chair EN 425 / ISO 4918 | Type W | | | | | |
| Impact sound reduction EN ISO 10140 | ~ 4 dB | ~ 17 dB | ~ 4 dB | ~ 4 dB | ~ 4 dB | ~ 4 dB |
| Effect of a furniture leg EN 424 | without damages | | | | | |
| wear resistance EN 660-2 | Group T | | | | | |
| anti-static properties EN 1815 | ≤ 2 kV | | | | | |
| Guarantee | en.wineo.de/service/guarantee | | | | | |




Utilisation class 23:
Heavy-duty use
in the domestic area



Utilisation class 34:
Very heavy-duty use
in the commercial sector



Utilisation class 41:
Medium use
in the light industrial sector
(vehicular traffic excluded)



Utilisation class 43:
Heavy-duty use
in the light industrial sector

Windmüller GmbH

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

www.wineo.de

Handed over by:

Product no. 20090977 | 11/2018

Member of



wineo